

DAC E (GAS 2")


External coupling devices

General characteristics

- Fixed structure in GJL-250 cast iron - movable structure in gjs-600-3;
- Epoxy-vinyl paint;
- Seals in NBR rubber;
- Full free passage;
- Fixing to tank walls by means of DN50 PN10 flange or 2" gas thread;
- With a suitable male/female reduction adapter the accessory can also be used with gas 1 1/4" and gas 1 1/2" delivery pumps.



All product images are indicative only

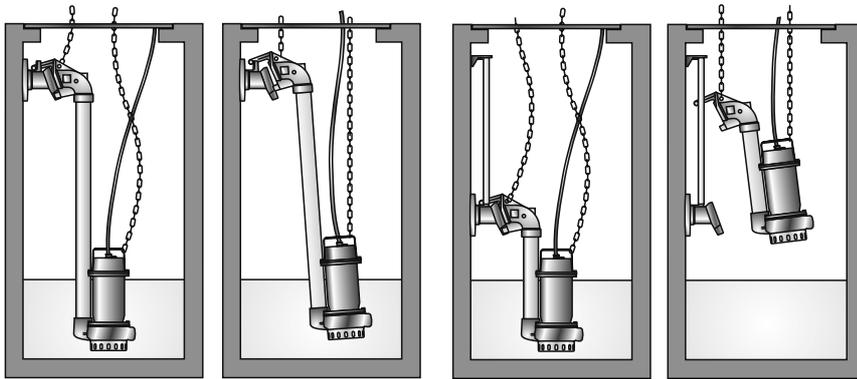


In installations in which the DAC-E needs to be fastened far from the well cover, two guide pipes (3/4") may be used, which are helpful for accompanying the electric pump until it is perfectly coupled.

Models

DAC -E G50/50H.....Inlet GAS 2", outlet GAS 2" and flange DN50 PN10

Overall dimensions and weights

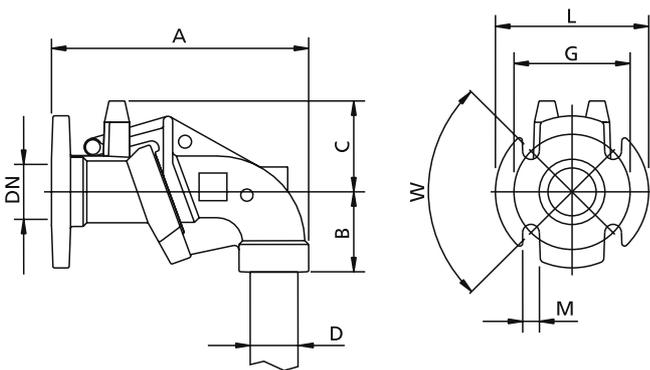

	A	B	C	D	DN	G	L	M	W	kg
DAC -E G50/50H	280	90	100	G 2"	G 2"	125	165	18	90°	8

Dimensions in mm

All weights and dimensions are indicative only

Packaging dimension

	A	B	C
DAC -E G50/50H	385	225	245

Dimensions in mm

All weights and dimensions are indicative only

