



## AVK BLIND FLANGE

712/3810-001

PN 10/16



AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.



### Product description:

Blind flange type X to EN 545 for water, waste water and neutral liquids to max. 70° C


### Standards:

- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16




### Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.

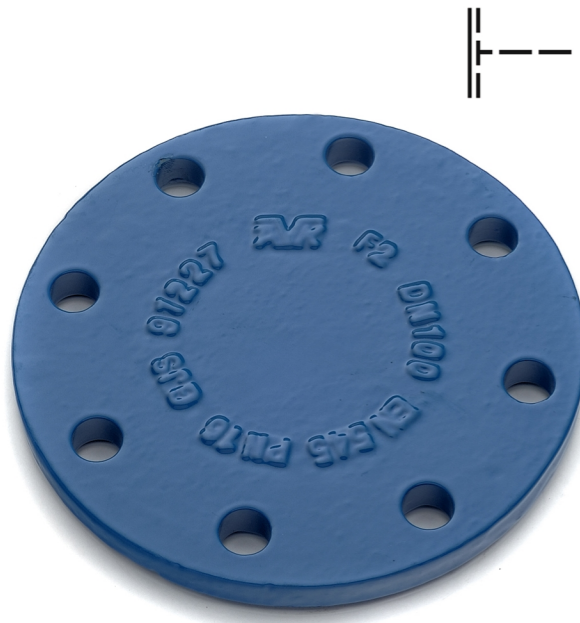

Expect ... **AVK**

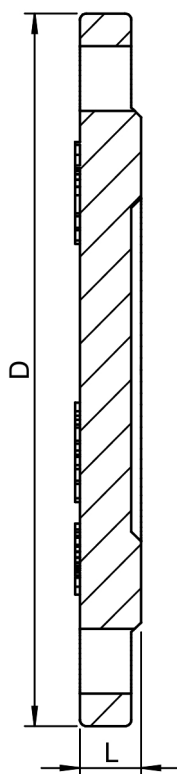

**Component list:**

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

**Reference nos. and dimensions:**

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight / kg
712-0040-38-101	40	PN10/16	19	2.0
712-0050-38-101	50	PN10/16	19	2.4
712-0060-38-101	60	PN10/16	19	2.7
712-0065-38-101	65	PN10/16	19	3.1
712-0080-38-101	80	PN10/16	19	3.5
712-0100-38-101	100	PN10/16	19	4.3
712-0125-38-101	125	PN10/16	19	5.6
712-0150-38-101	150	PN10/16	19	7.2
712-0200-38-100	200	PN10	20	11
712-0200-38-101	200	PN16	20	11
712-0250-38-100	250	PN10	22	17
712-0250-38-101	250	PN16	22	17
712-0300-38-100	300	PN10	25	24
712-0300-38-101	300	PN16	25	24
712-0400-38-100	400	PN10	25	37
712-0400-38-101	400	PN16	28	45
712-0500-38-100	500	PN10	27	56
712-0500-38-101	500	PN16	32	77
712-0600-38-100	600	PN10	30	87
712-0600-38-101	600	PN16	36	124