

# Centrometal

## HEATING TECHNIQUE


Centrometal d.o.o. - Glavna 12, 40306 Macinec, Croatia, tel: +385 40 372 600, fax: +385 40 372 61 1



## Technical instructions

for connecting and use of additional equipment

Module for control  
of two heating circuits

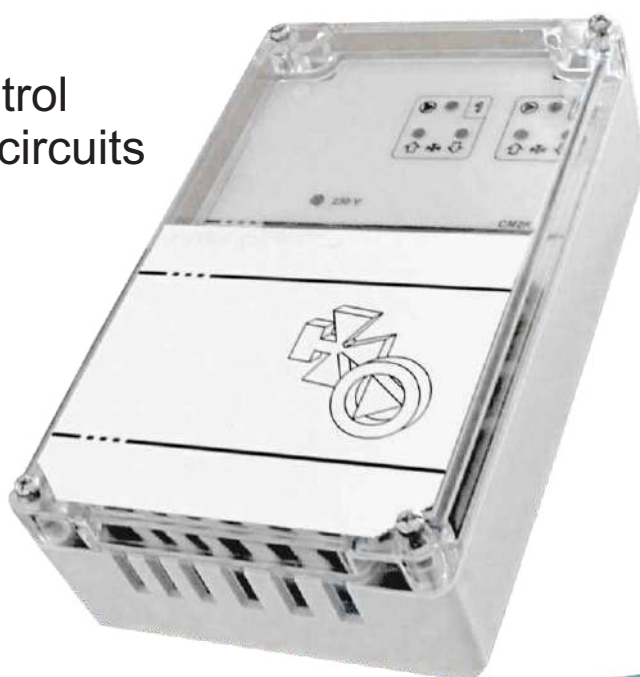

(for boilers PelTec / PelTec-lambda)



**CM2K-P** (boiler PelTec, PelTec-lambda)

# PART 1

## INSTALLATION INSTRUCTIONS



**Only authorized persons are permitted for installation of this product**

## DELIVERY CONTENT CM2K-P

CM2K-P

1X



UTP cable L=5m

1X



Main flow sensor

2X



Outside temperature sensor

1X



## ADDITIONAL EQUIPMENT (for module CM2K-P)

Room corrector „CSK“



### Note:

On module for control two heating circuits CM2K-P can be connected only room corrector „CSK“ made by Centrometal d.o.o. factory. On CM2K-P can be connected two room correctors „CSK“, one per each heating circuit.

1.0 CONNECTING CM2K MODUL TO THE BOILER


Connecting CM2K module with boiler PelTec / PelTec-lambda is done by using UTP cable.

CM2K


UTP			
1	2	3	4
Boiler	Boiler	Reserve	Reserve

PelTec / PelTec-lambda


S7	S8	S9	S10	S11	S12
					UTP
S1	S2	S3	S4	S5	S6

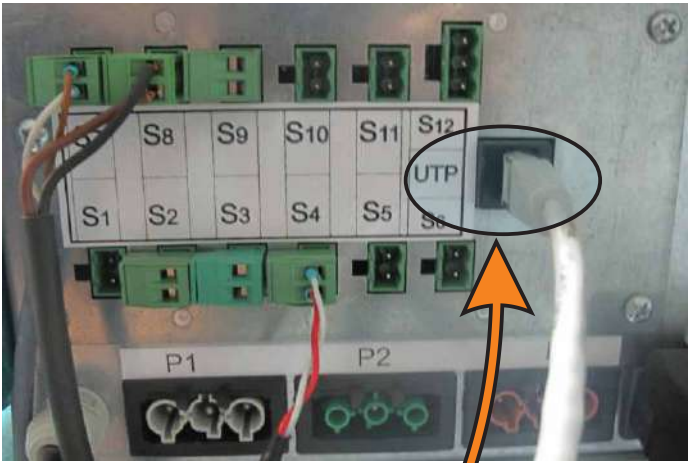


## 2.0 CONNECTING THE COMPONENTS ON CM2K-P MODUL

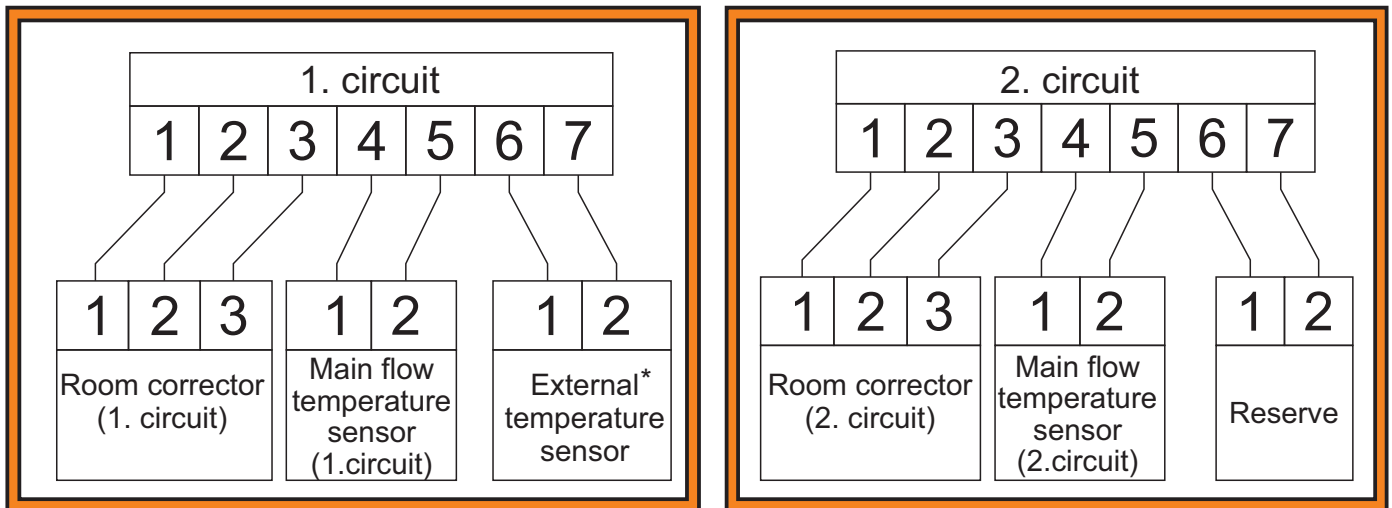


\* External sensor can be connected on the module CM2K-P or on the boiler PelTec / PelTec-lambda

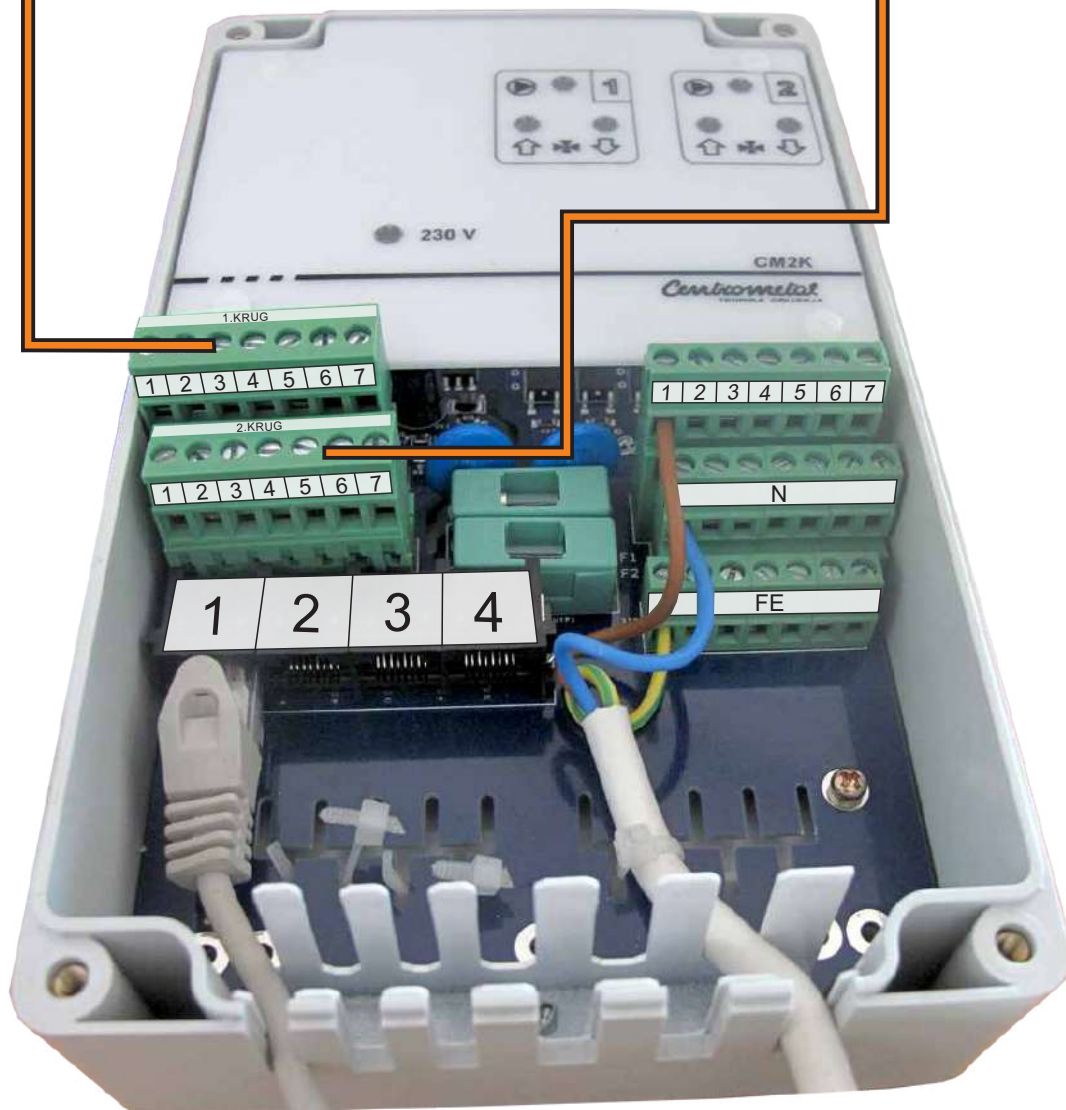

PHASES (L)


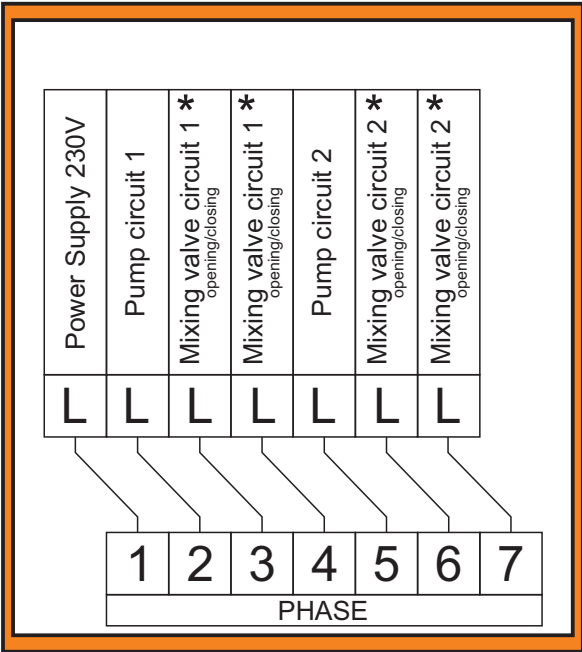


COMMON NEUTRAL (N)

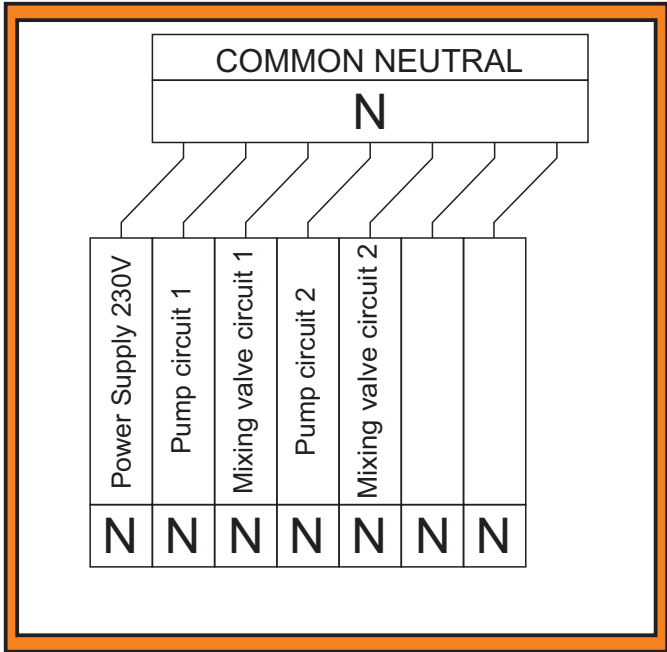


\* Connecting the phases for opening or closing mixing valve depends on the method of mixing valve installation

COMMON GROUND (⏏)



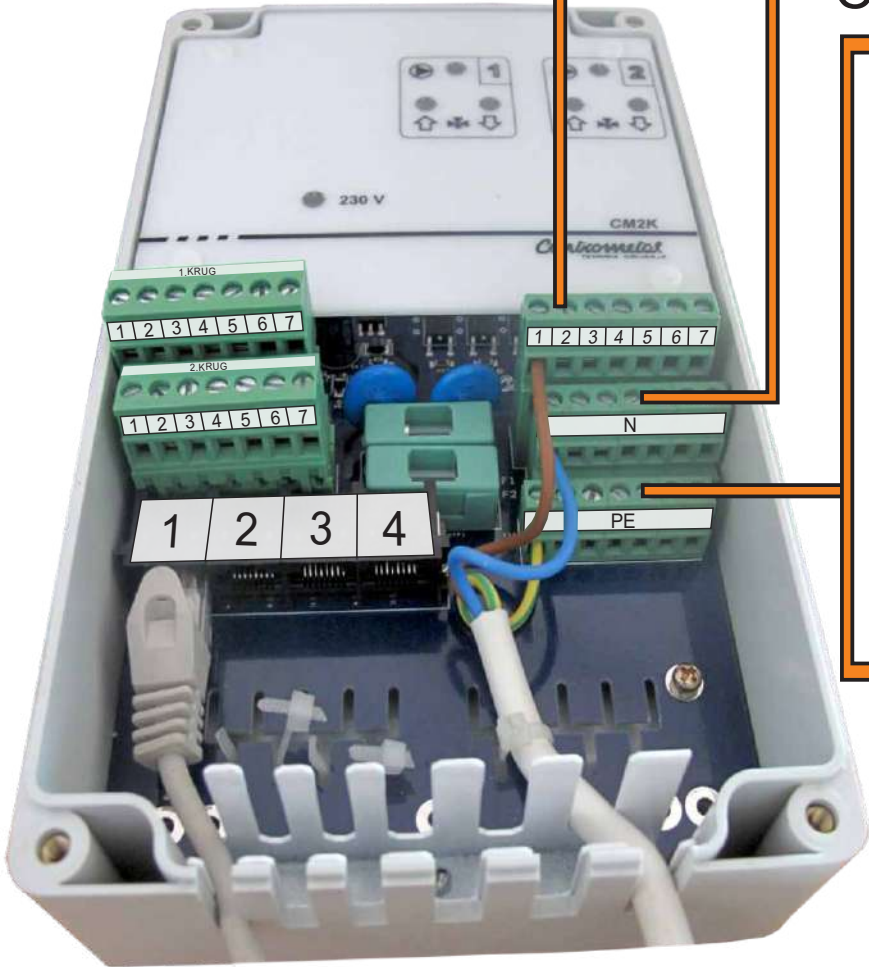
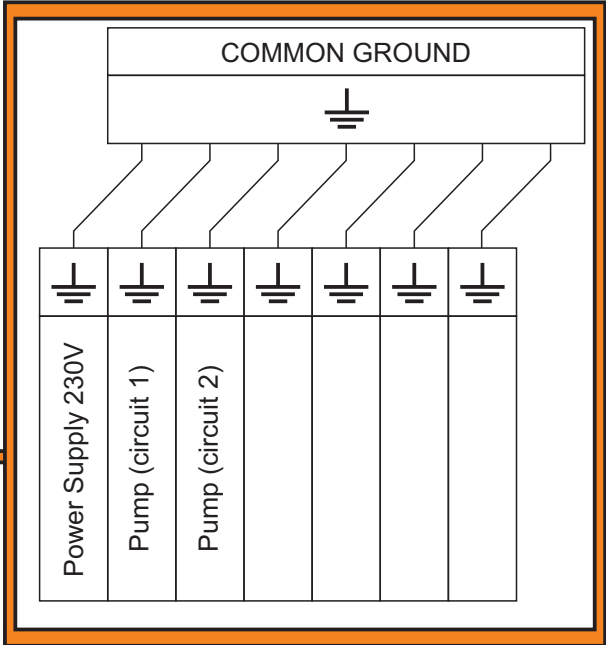




### 3.0 LED INDICATORS

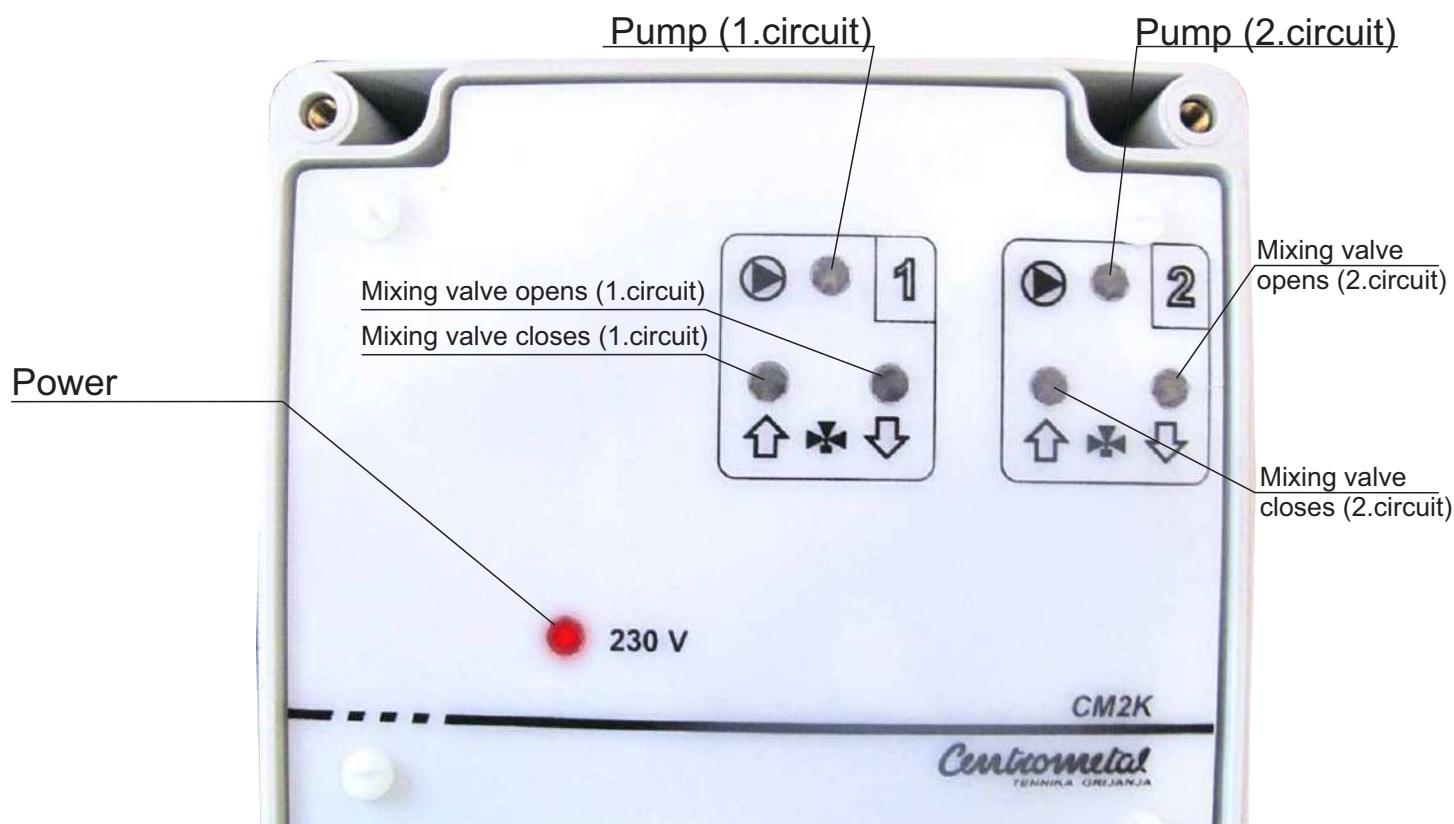

### 3.1 EXAMPLES

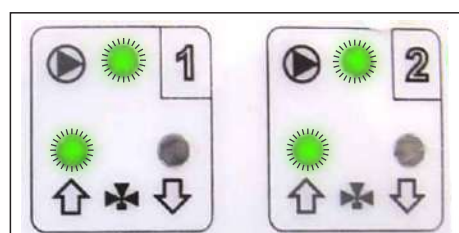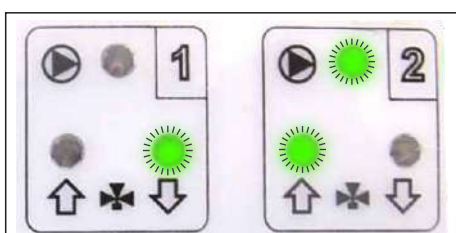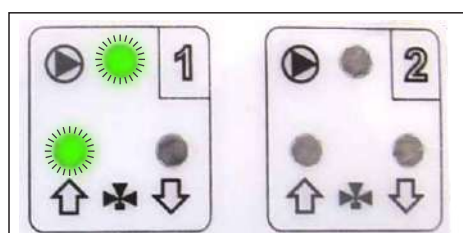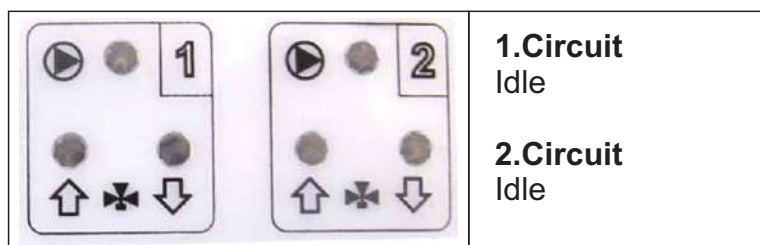

### 4.0 CONFIGURATION (Only authorized person can access the configuration)






Two heating circuits module can be used only in configurations that include accumulation tank or hydraulic crossover

#### Configuration in which is possible to use two heating circuits module CM2K

- configuration BUF (accumulation tank)
- configuration DHW II BUF (domestic hot water II accumulation tank)
- configuration BUF--IKG (accumulation tank -- indirect heating circuit)
- configuration DHW II BUF -- IHC (DHW II accumulation tank -- indirect heating circuit)
- configuration BUF--DHW (accumulation tank--domestic hot water)
- configuration BUF--IHC II DHW (accumulation tank -- indirect heating circuit II DHW)
- configuration CRO (Hydraulic crossover)
- configuration CRO/BUF (hydraulic crossover or accumulation tank)
- configuration BUF--IHCx2 (accumulation tank -- 2 indirect heating circuits)








**Configuration schemes and display you can find in technical instructions for using of regulation PelTec / PelTec -lambda**

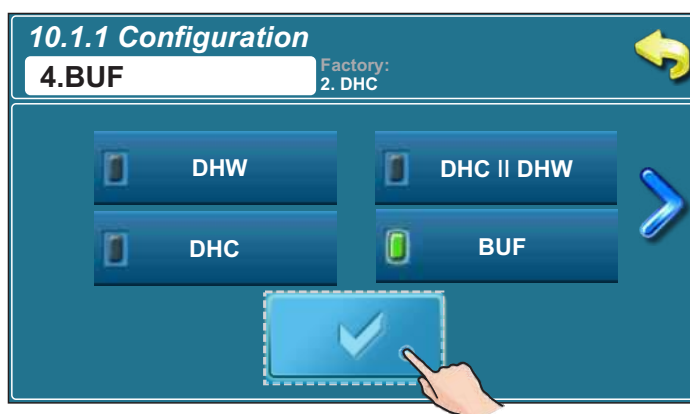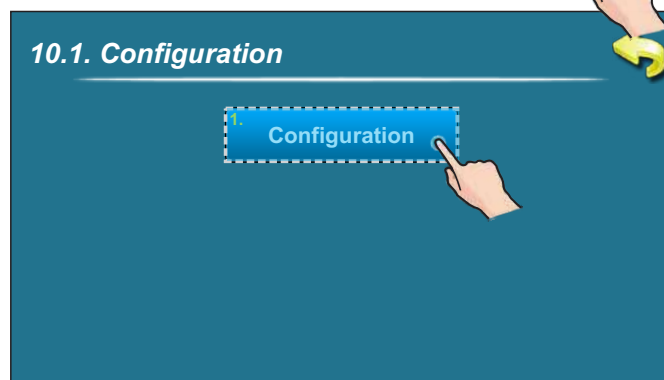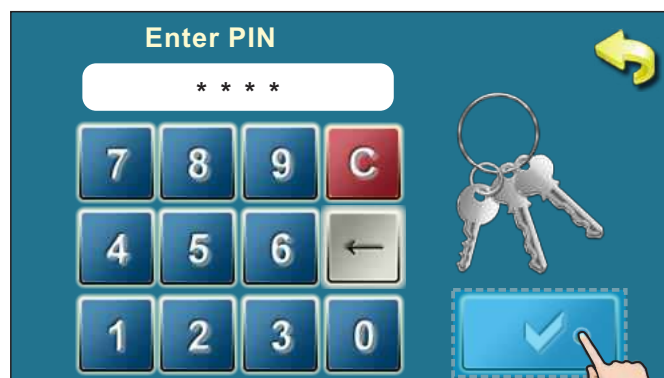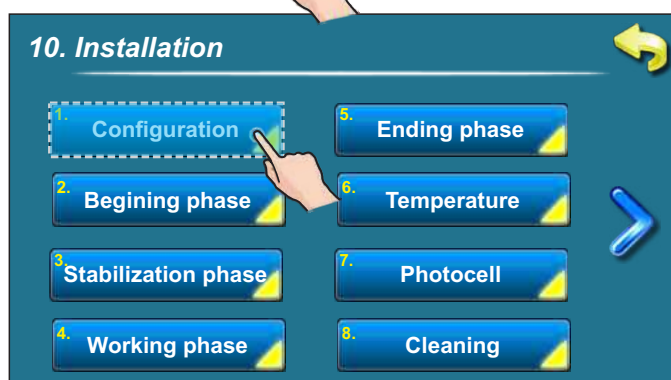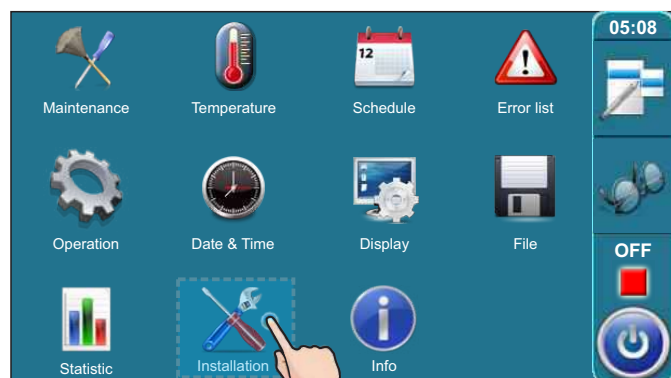





## ACTIVATING THE MODULE



Only authorized persons can activate CM2K module over button "installation" by entering a PIN.

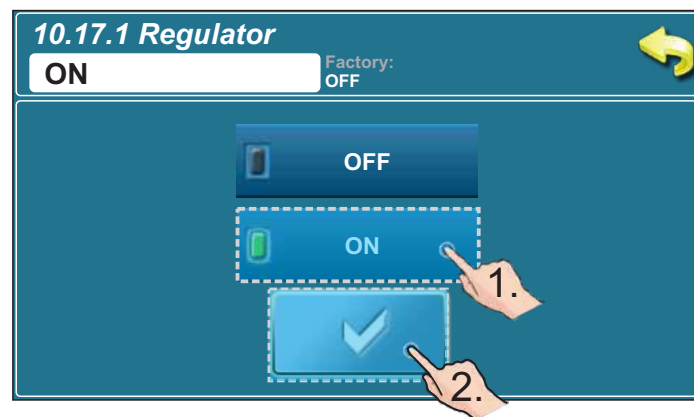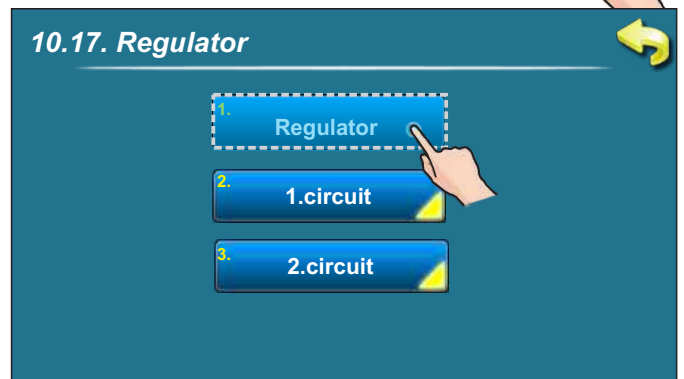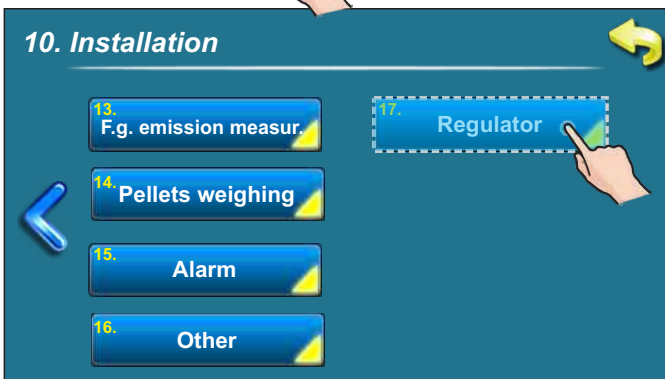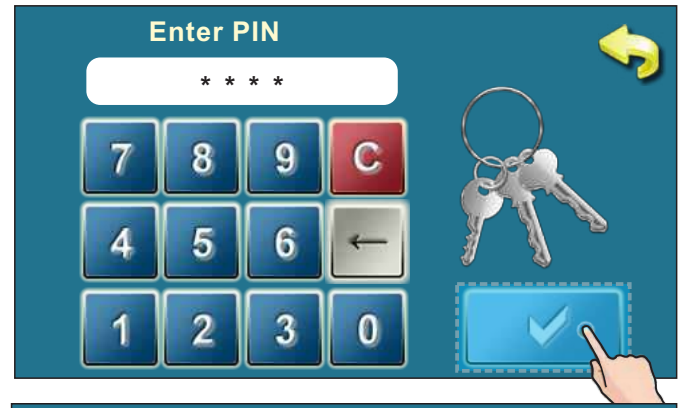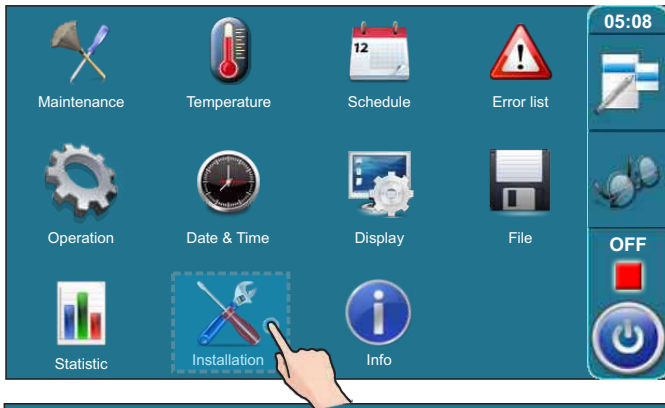

When is CM2K regulator turned ON, icon of regulator will appear on the main display. By that icon user will be able to review and change some settings.

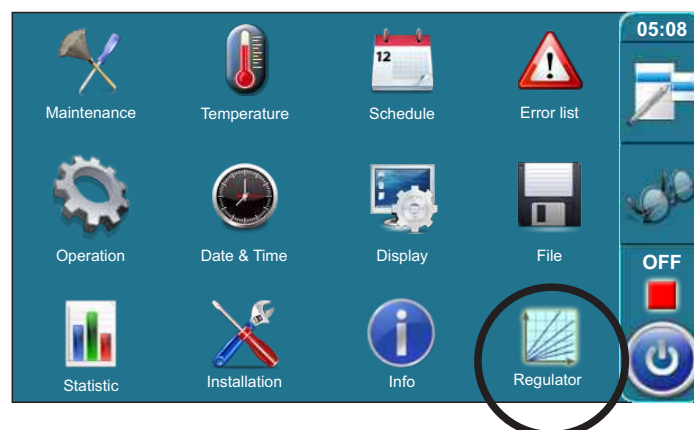

It is possible to graphically monitor the operation of both heating circuits.  
To open the graphical window of 2 heating circuits, it is necessary to press the .

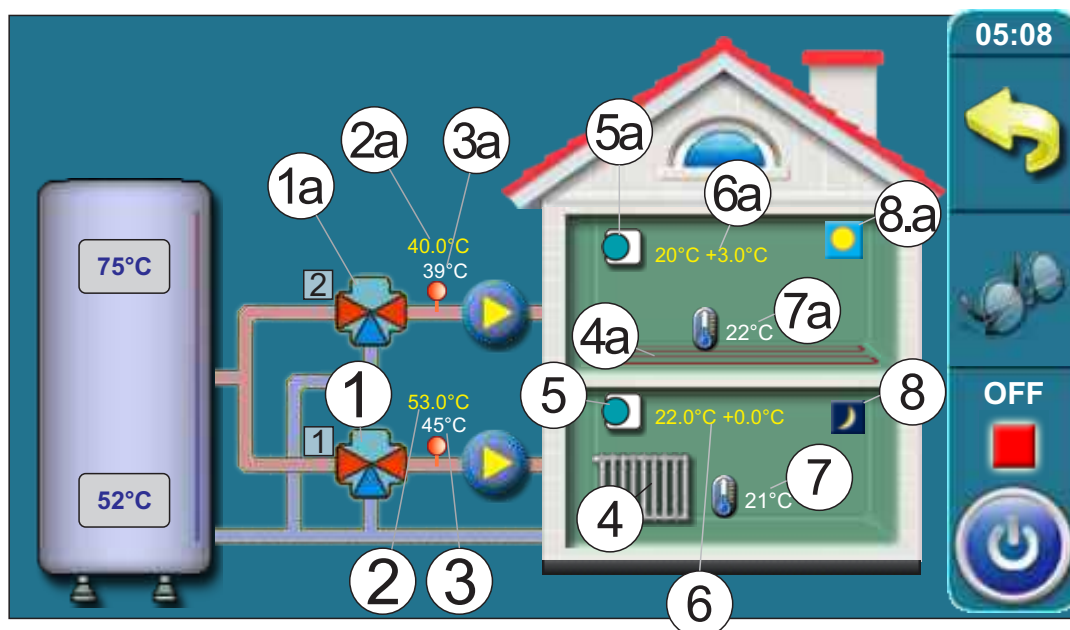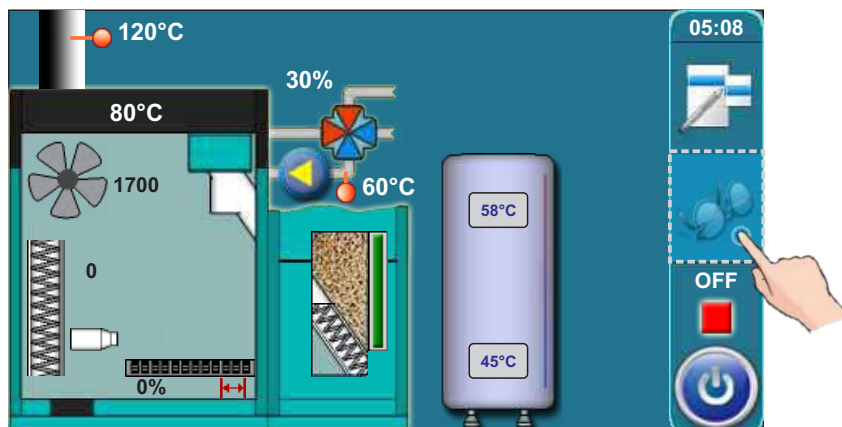

For each heating circuit can be specifically select items.


For example, you can Include / exclude heating circuits, turn on/off room corrector, choose heating type in each circuit (radiators / floor), choose the mode (day / night).

- |   |   |
|---|---|
| 1. Mixing valve (1.circuit)   | 6. The desired temperature + deviation by room corrector (1.circuit)                              |
| 2. The calculated flow temperature to achieve the the required room temperature (1.circuit) | 7. Current measured room temperature (shown only if the room corrector is turned on) in 1.circuit |
| 3. Current measured flow temperature (1.circuit)  | 8. Mode (1.circuit) (day / night)   |
| 4. Heating type on 1. circuit (radiators or floor heating)                                  |   |
| 5. Room corrector „CSK“ on 1. circuit (if turned off, icon disappears)                      |   |




**Items 1a - 8a have the same meaning as items 1-8 (described above) which only relate to 2. heating circuit.**

## SETTING PARAMETERS FOR EACH HEATING CIRCUIT

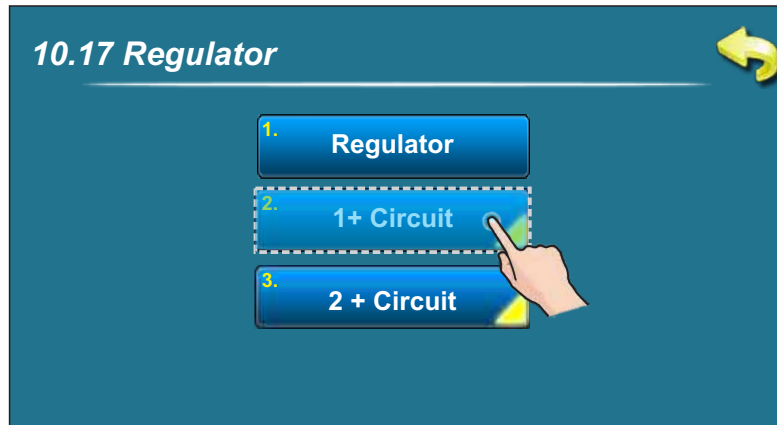


### 1. CIRCUIT

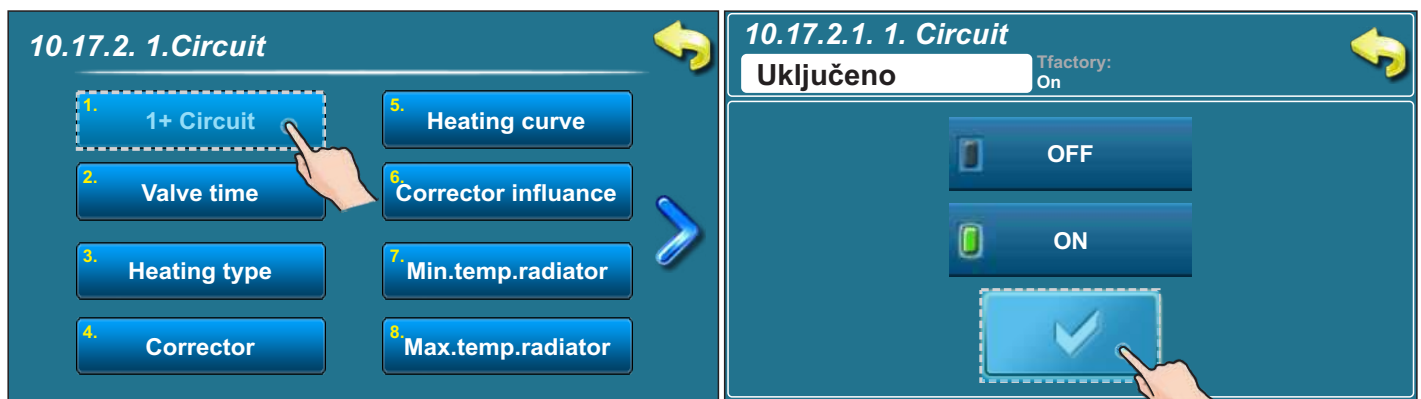

**Possible selection:** - factory: **ON**  
-OFF, ON

By using this option 1.circuit can be turned off/on.

### VALVE TIME

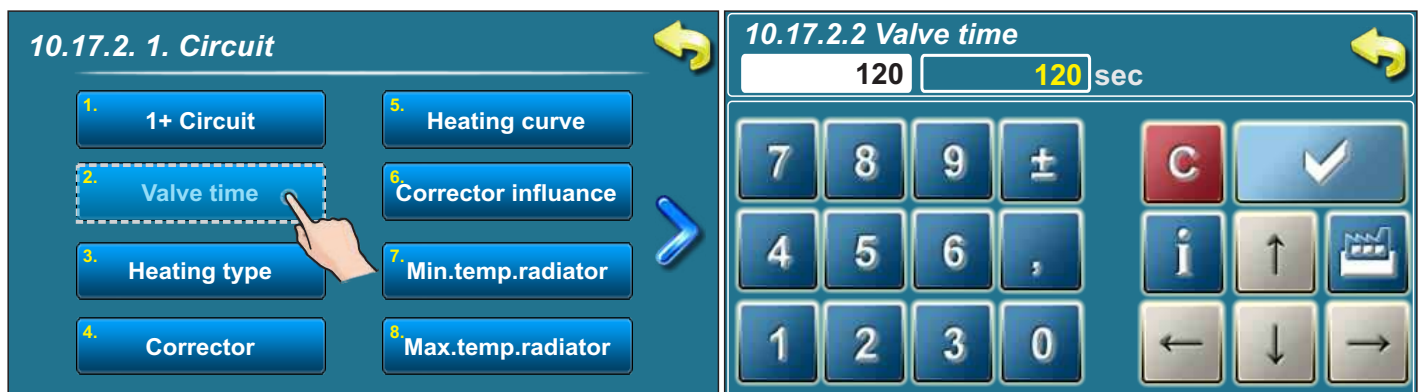

**Possible selection:** - factory: **120 sec**  
- Minimum: 10 sec  
- Maximum: 300 sec

This parameter defines how many seconds is required for mixing valve opening / closing.

**THIS NUMBER MUST CORRESPOND EXACTLY TO THE TIME IT TAKES THE ACTUATOR TO OPEN THE VALVE (DEPENDS ON THE TYPE OF ACTUATOR)**

## Setting parameters for each heating circuit

### HEATING TYPE

The interface shows two screens. The first screen, titled '10.17.2. 1. Circuit', has eight buttons: '1+ Circuit', 'Valve time', 'Heating type' (highlighted with a dashed box and a hand icon), 'Corrector', 'Heating curve', 'Corrector influence', 'Min.temp.radiator', and 'Max.temp.radiator'. A blue arrow points from the 'Heating type' button to the second screen. The second screen, titled '10.17.2.3. Heating type', shows a dropdown menu set to 'Disabled' (with 'Factory: Disabled' noted). Below are four buttons: 'Disabled', 'Floor', 'Radiators' (highlighted with a dashed box and a hand icon), and 'Const. Temp.'. A blue checkmark button is at the bottom.

**Possible selection:** - factory: **radiators**

Disabled, Radiators, Floor, Const. Temp.

This option allows setting the heating type that will be displayed on screen (1. circuit).

### CORRECTOR

The interface shows two screens. The first screen, titled '10.17.2. 1. Circuit', has the same eight buttons as before, but 'Corrector' is highlighted with a dashed box and a hand icon. A blue arrow points from the 'Corrector' button to the second screen. The second screen, titled '10.17.2.4. Corrector', shows a dropdown menu set to 'OFF' (with 'Factory: OFF' noted). Below are two buttons: 'OFF' and 'ON' (highlighted with a dashed box and a hand icon). A blue checkmark button is at the bottom.

**Possible selection:** - factory: **Off**

OFF, ON


With this option room corrector can be turned on/off.

### HEATING CURVE

The interface shows two screens. The first screen, titled '10.17.2. 1. Circuit', has the same eight buttons as before, but 'Heating curve' is highlighted with a dashed box and a hand icon. A blue arrow points from the 'Heating curve' button to the second screen. The second screen, titled '10.17.2.5. Heating curve', shows two input fields, both containing '1.0'. Below is a numeric keypad with digits 0-9, a decimal point, and a sign button. To the right are buttons for 'C' (Celsius), a checkmark, an information icon, and up/down arrows. A blue checkmark button is at the bottom right.

**Possible selection** - Factory: **1**  
- Minimum: 0,1  
- Maximum: 4,0

This parameter determine the coefficient of the heating curve. The regulation calculate required flow temperature according to the heating curve and outside temperature to achieve the desired room tempearatura

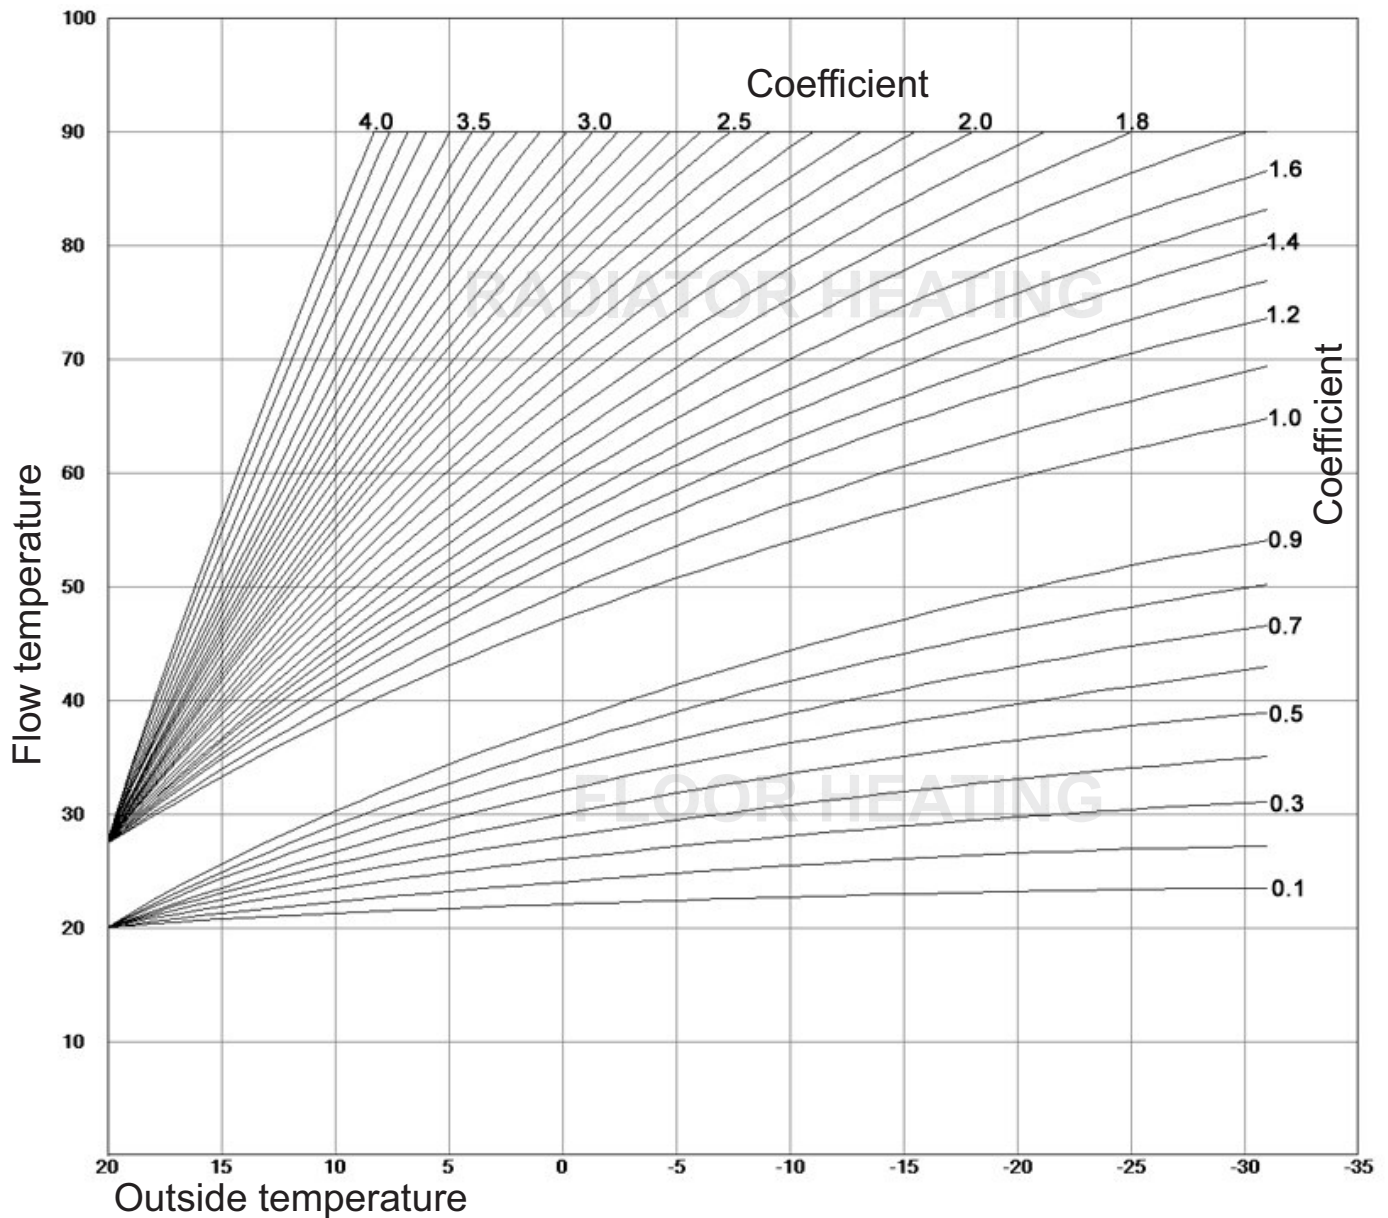

## CORRECTOR INFLUANCE

**10.17.2. 1. Circuit**

1. 1+ Circuit

2. Valve time

3. Heating type

4. Corrector

5. Heating curve

6. Corrector influence

7. Min.temp.radiator

8. Max.temp.radiator

**10.17.2.6. Corrector influence**

7

8

9

±

C

✓

4

5

6

,

i

↑

⏏

1

2

3

0

←

↓

→

**Possible selection:** - Factory: 1  
 - Minimum: 0,1  
 - Maximum: 5,0

This parameter determines coefficient of room corrector influence.



### MINIMUM RADIATOR TEMPERATURE

**10.17.2. 1. Circuit**

1. 1+ Circuit	5. Heating curve
2. Valve time	6. Corrector influence
3. Heating type	7. Min.temp.radiator
4. Corrector	8. Max.temp.radiator

**10.17.2.7. Min. temp. radiator**

20 20 °C

7	8	9	±	C	✓
4	5	6	,	i	↑
1	2	3	0	←	↓
				→	

**Possible selection:**

- factory: 20°C
- Minimum: 20°C
- Maksimum: 90°C

This parameter determines the minimal possible flow temperature for radiator heating.  
Required flow temperature to satisfy room temperature can **not** be lower then this parameter.

### MAKSIMUM RADIATOR TEMPERATURE

**10.17.2. 1. Circuit**

1. 1+ Circuit	5. Heating curve
2. Valve time	6. Corrector influence
3. Heating type	7. Min.temp.radiator
4. Corrector	8. Max.temp.radiator

**10.17.2.8. Max. temp. radiator**

90 90 °C

7	8	9	±	C	✓
4	5	6	,	i	↑
1	2	3	0	←	↓
				→	

**Possible selection:**

- factory: 90°C
- Minimum: 20°C
- Maximum: 90°C

This parameter determines the maximum possible flow temperature for radiator heating.  
Required flow temperature to satisfy room temperature can **not** be higher then this parameter.

### MINIMUM FLOW TEMPERATURE (FLOOR HEATING)

**10.17.2. 1. Circuit**

9. Min. temp. floor	13. Night room temp.
10. Max.temp.floor	14. Day/Night Temp.
11. Const. temp.	15. Table 1
12. Day room temp.	16. Transition Time

**10.17.2.9. Min. temp. floor**

20 20 °C

7	8	9	±	C	✓
4	5	6	,	i	↑
1	2	3	0	←	↓
				→	

**Possible selection:**

- factory: 20°C
- Minimum: 20°C
- Maximum: 40°C

This parameter determines the minimum possible flow temperature for floor heating.  
Required flow temperature to satisfy room temperature can **not** be lower then this parameter.

## MAXIMUM FLOW TEMPERATURE (FLOOR HEATING)

**10.17.2. 1. Circuit**

9. Min. temp. floor

13. Night room temp.

10. Max.temp.floor

14. Day/Night Temp.

11. Const. temp.

15. Table 1

12. Day room temp.

16. Transition Time

**10.17.2.10. Max. temp. floor**

40

→

40

°C

7

8

9

±

4

5

6

,

1

2

3

0

C

✓

i

↑

↓

←

→

**Possible selection:** - factory: 40°C  
 - Minimum: 20°C  
 - Maximum: 40°C

This parameter determines the maximum possible flow temperature for floor heating.  
 Required flow temperature to satisfy room temperature can **not** be higher then this parameter.

## CONSTANT TEMPERATURE

**10.17.2. 1. Circuit**

9. Min. temp. floor

13. Night room temp.

10. Max.temp.floor

14. Day/Night Temp.

11. Const. temp.

15. Table 1

12. Day room temp.

16. Transition Time

**10.17.2.11. Const. temp.**

60

→

60

°C

7

8

9

±

4

5

6

,

1

2

3

0

C

✓

i

↑

↓

←

→

**Possible selection:** - factory: 60°C  
 - Minimum: 20°C  
 - Maximum: 90°C

This parameter determines the value of the constant temperature (in constant temp. heating)

## VALUE OF DAY ROOM TEMPERATURE

**10.17.2. 1. Circuit**

9. Min. temp. floor

13. Night room temp.

10. Max.temp.floor

14. Day/Night Temp.

11. Const. temp.

15. Table 1

12. Day room temp.

16. Transition Time

**10.17.2.12. Day room temp.**

20.0

→

20.0

°C

7

8

9

±

4

5

6

,

1

2

3

0

C

✓

i

↑

↓

←

→

**Possible selection:** - factory: 20,0°C  
 - Minimum: 5°C  
 - Maximum: 30,0°C

This parameter determines the value of day room temperature.

### VALUE OF NIGHT ROOM TEMPERATURE

**10.17.2. 1. Circuit**

9. Min. temp. floor

13. Night room temp.

10. Max.temp.floor

14. Day/Night Temp.

11. Const. temp.

15. Table 1

12. Day room temp.

16. Transition Time

**10.17.2.13. Night room temp**

20.0

20.0 °C

7 8 9 ±

4 5 6 ,

1 2 3 0

C ✓

i ↑

← ↓ →

**Possible selection:** - factory: 20,0°C  
 - Minimum: 5°C  
 - Maximum: 30,0°C

This parameter determines the value of night room temperature.

### DAY/NIGHT TEMPERATURE CHOICE

**10.17.2. 1. Circuit**

9. Min. temp. floor

13. Night room temp.

10. Max.temp.floor

14. Day/Night Temp.

11. Const. temp.

15. Table 1

12. Day room temp.

16. Transition Time

**10.17.2.14. Day/Night Temp.**

Day Temp.

Factory:  
Day Temp.

Day Temp.

Table


Night Temp.

✓

**Possible selection:** - factory: **Day temperature**  
 Day temperature, Night temperature, Table

This option enables you to choose type of desired temperature (day, night or table.) In next page you can see how to fill a table.

## DAY/NIGHT TEMPERATURE TABLE

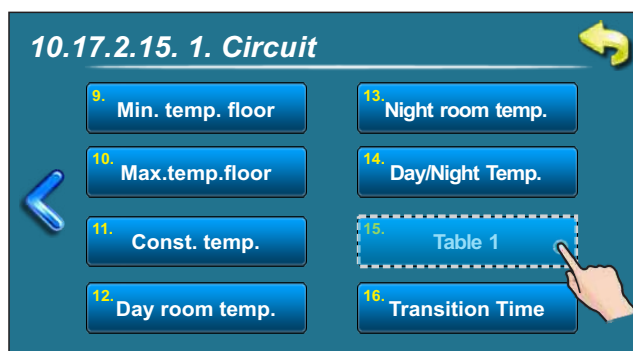

1. circuit - Table 1

	MON	TUE	WED	THU	FRI	SAT	SUN
☀	06:00	06:00	06:00	06:00	06:00	05:00	06:00
🌙	22:00	22:00	22:00	22:00	22:00	10:00	22:00
☀							
🌙							
☀						14:00	
🌙						23:00	


☀ Day temperature      🌙 Night temperature

Each cell marks the beginning of some type (day/night) of selected room temperature. According to this table every day from monday at 06:00 am is activated day room temperature, until 22:00 pm when is activated night room temperature until tuesday, when at 06:00 am is again activated day room temperature.

On saturday, the day temperature is activated at 05:00 am and works until 10:00 am when is switched to night temperature. At 14:00 pm is again activated day room temperature up to 23:00 pm when is again switched to night temperature.

When passed one cycle (week) circle starts again from the beginning. The values of a day/night room temperature can be selected as is described in previous pages.

## TRANSITION TIME (is used only when the configuration doesn't contain room corrector)

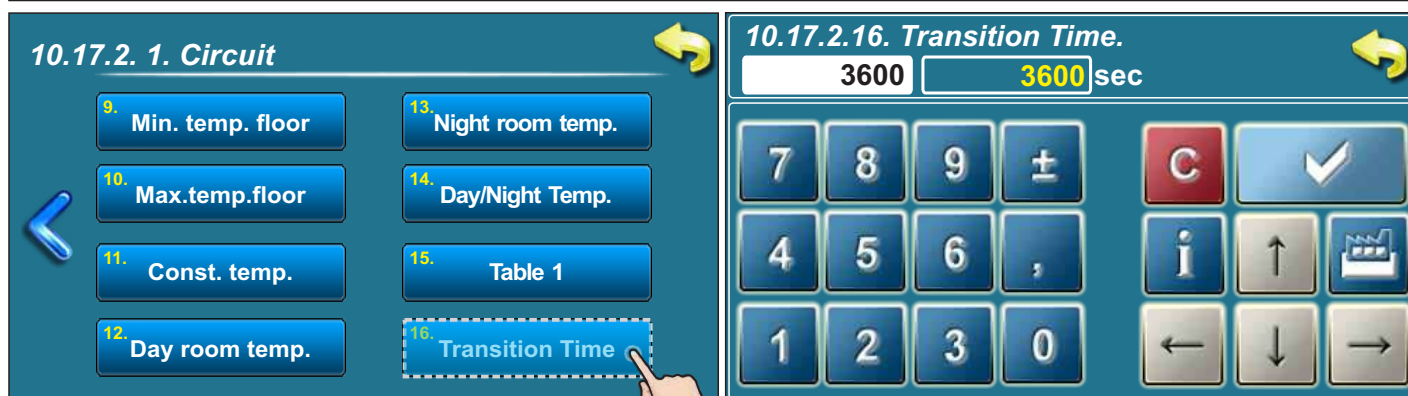

**Possible selection:** - factory: **3600sec**  
 - Minimum: 0 sec  
 - Maximum: 18000 sec

This parameter is used only when configuration doesn't contain room corrector, because regulation doesn't have information of room temperature.

This parameter is time which is presumed that the system will achieve a given room temperature in a transition from day to night mode, and vice versa. So, this is time in which will "flow temperature" be optimally adjusted to achieve quick transition.



**In the same way, you can set the same parameters for 2. circuit**

# PART 2



## INSTRUCTIONS FOR USER




**For any kind of function problems the user is obligated to contact the authorized person who made a first startup.**



Users can change some parameters to adjust the heating system. Parameters can be changed by clicking icon "Regulator".

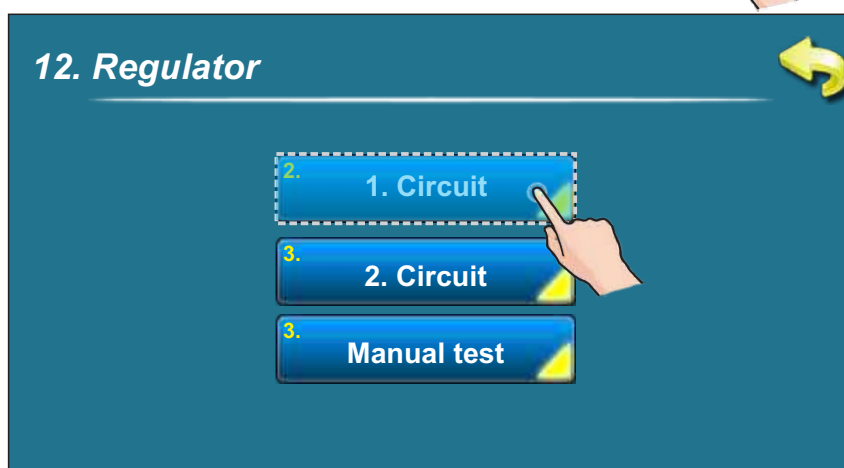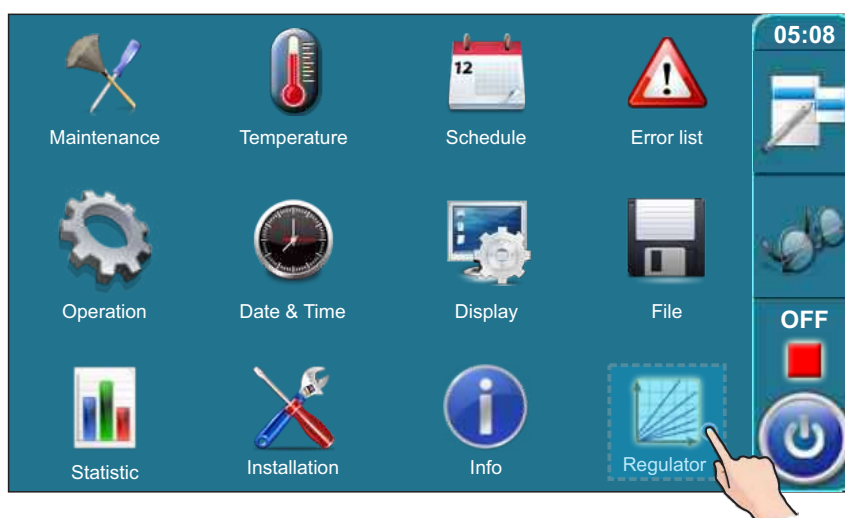

## 1. CIRCUIT

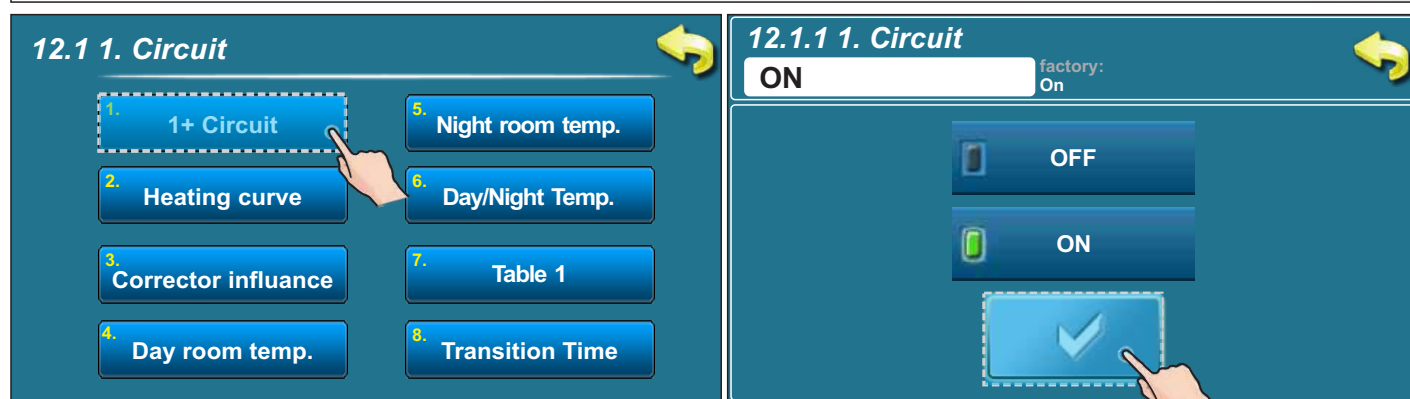

**Possible selection:** - factory: ON  
-OFF, ON

By using this option 1+ circuit can be turned off/on.

## HEATING CURVE

### 12.1 1. Circuit

1. 1+ Circuit

2. Heating curve

3. Corrector influence

4. Day room temp.

5. Night room temp.

6. Day/Night Temp.

7. Table 1

8. Transition Time

### 12.1.2 Heating curve

7

8

9

±

C

✓

4

5

6

,

i

↑

⚙

1

2

3

0

←


↓

→


**Possible selection**

- Factory: 1
- Minimum: 0,1
- Maximum: 4,0

This parameter determine the coefficient of the heating curve. The regulation calculate required flow temperature according to the heating curve and outside temperature to achieve the desired room temperature

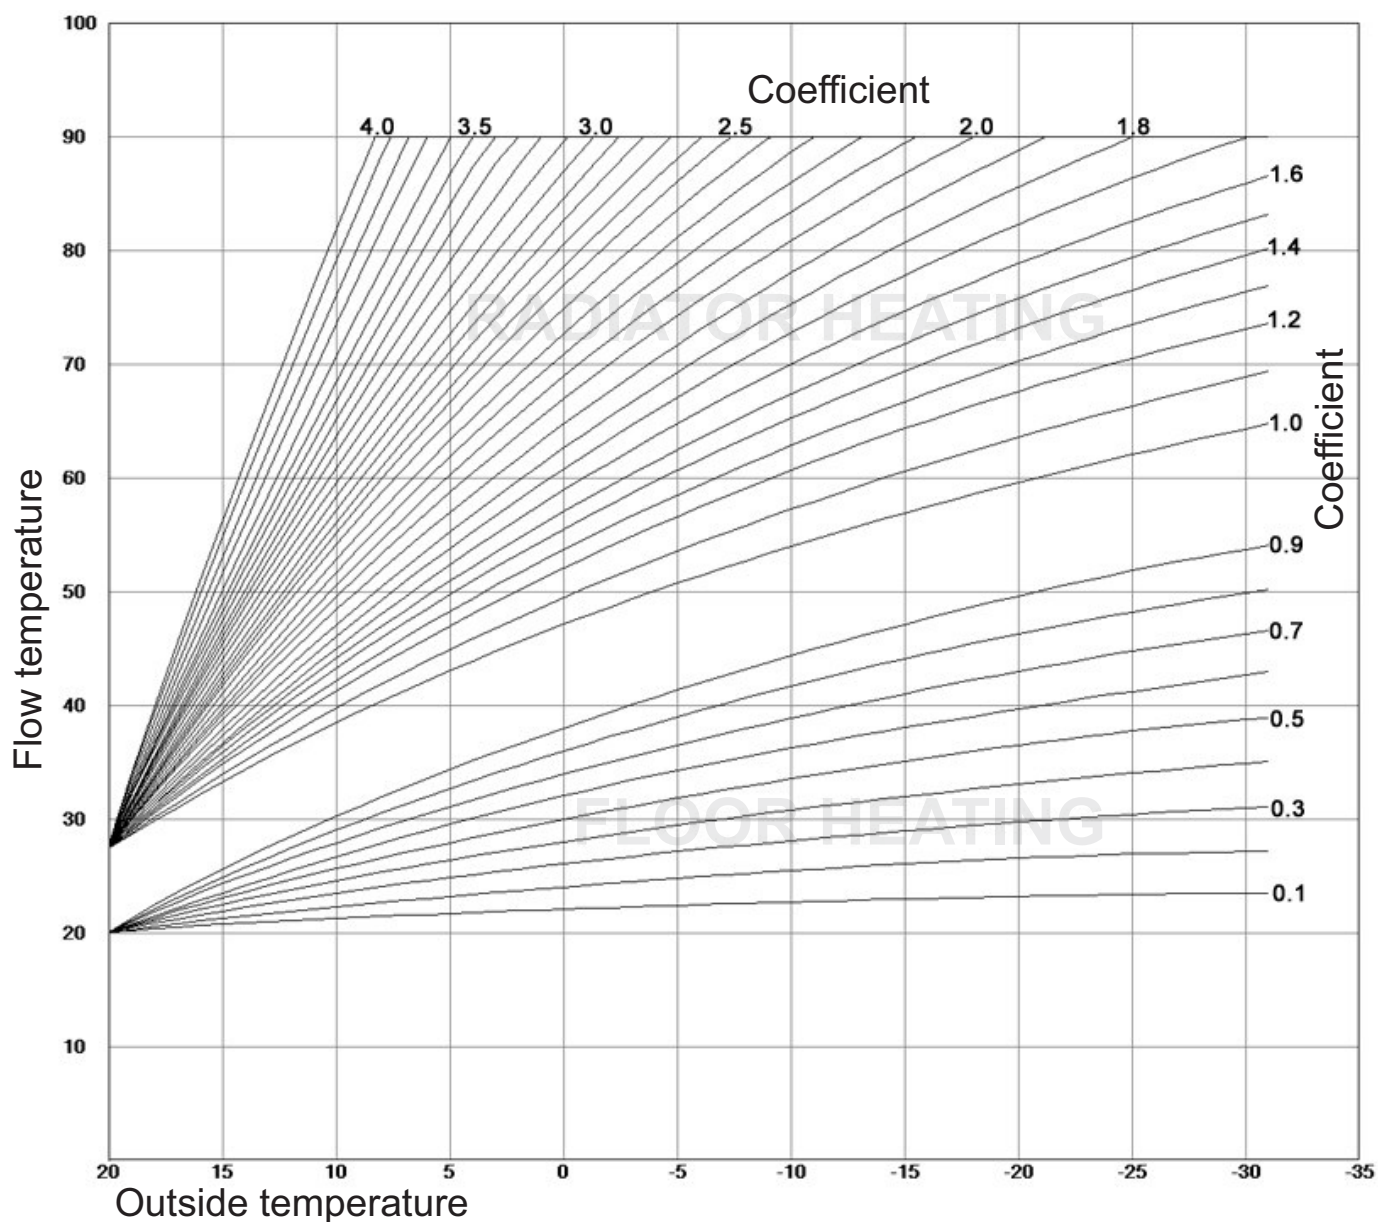


## CORRECTOR INFLUANCE

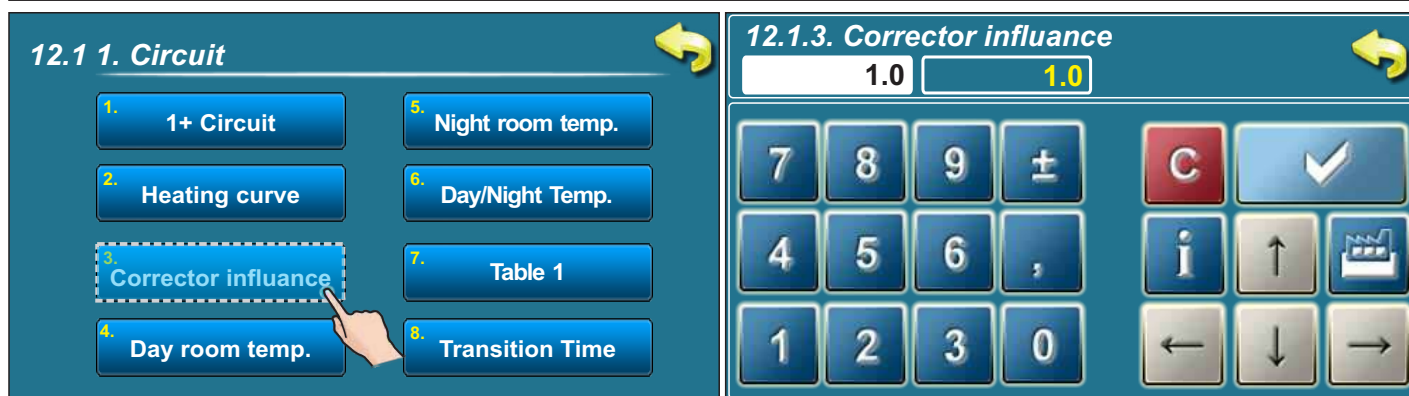

**Possible selection:**

- Factory: 1
- Minimum: 0,1
- Maximum: 5,0

This parameter determines coefficient of room corrector influence.

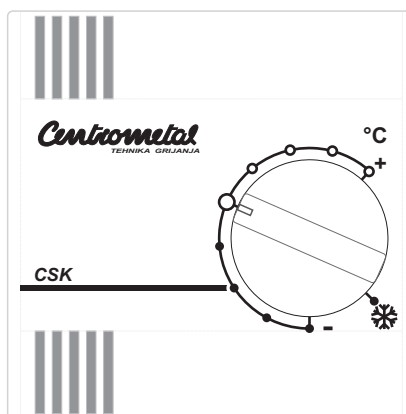

## VALUE OF DAY ROOM TEMPERATURE



**Possible selection:**

- factory: 20,0°C
- Minimum: 5°C
- Maximum: 30,0°C

This parameter determines the value of day room temperature.

## VALUE OF NIGHT ROOM TEMPERATURE

**12.1 1. Circuit**

- 1. 1+ Circuit
- 2. Heating curve
- 3. Corrector influence
- 4. Day room temp.
- 5. Night room temp.
- 6. Day/Night Temp.
- 7. Table 1
- 8. Transition Time

**12.1.5. Night room temp**

20.0 20.0 °C

7 8 9 ± C ✓

4 5 6 , i ↑

1 2 3 0 ← ↓ →

**Possible selection:** - factory: 20,0°C  
 - Minimum: 5°C  
 - Maximum: 30,0°C

This parameter determines the value of night room temperature.

## DAY/NIGHT TEMPERATURE CHOICE

**12.1 1. Circuit**

- 1. 1+ Circuit
- 2. Heating curve
- 3. Corrector influence
- 4. Day room temp.
- 5. Night room temp.
- 6. Day/Night Temp.
- 7. Table 1
- 8. Transition Time

**12.1.6. Day/Night Temp.**

Day Temp. Factory: Day Temp.

Day Temp. Table


Night Temp.

✓

**Possible selection:** - factory: Day temperature  
 Day temperature, Night temperature, Table

This option enables you to choose type of desired temperature (day, night or table.) In next page you can see how to fill a table.

## DAY/NIGHT TEMPERATURE TABLE

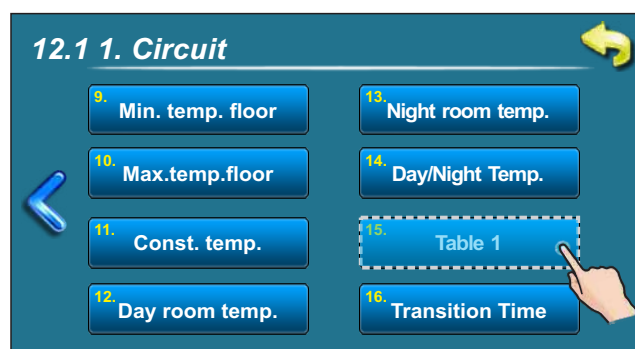

1. circuit - Table 1

	MON	TUE	WED	THU	FRI	SAT	SUN
☀	06:00	06:00	06:00	06:00	06:00	05:00	06:00
🌙	22:00	22:00	22:00	22:00	22:00	10:00	22:00
☀							
🌙							
☀						14:00	
🌙						23:00	

☀ Day temperature      🌙 Night temperature


Each cell marks the beginning of some type (day/night) of selected room temperature. According to this table every day from monday at 06:00 am is activated day room temperature, until 22:00 pm when is activated night room temperature until tuesday, when at 06:00 am is again activated day room temperature.

On saturday, the day temperature is activated at 05:00 am and works until 10:00 am when is switched to night temperature. At 14:00 pm is again activated day room temperature up to 23:00 pm when is again switched to night temperature.

When passed one cycle (week) circle starts again from the beginning. The values of a day/night room temperature can be selected as is described in previous pages.

The type of temperature (day/night) will not be changed in the same moment, he will be changed occur gradually by parameter "time of transition" (see below).

## TRANSITION TIME (is used only when the configuration doesn't contain room corrector)

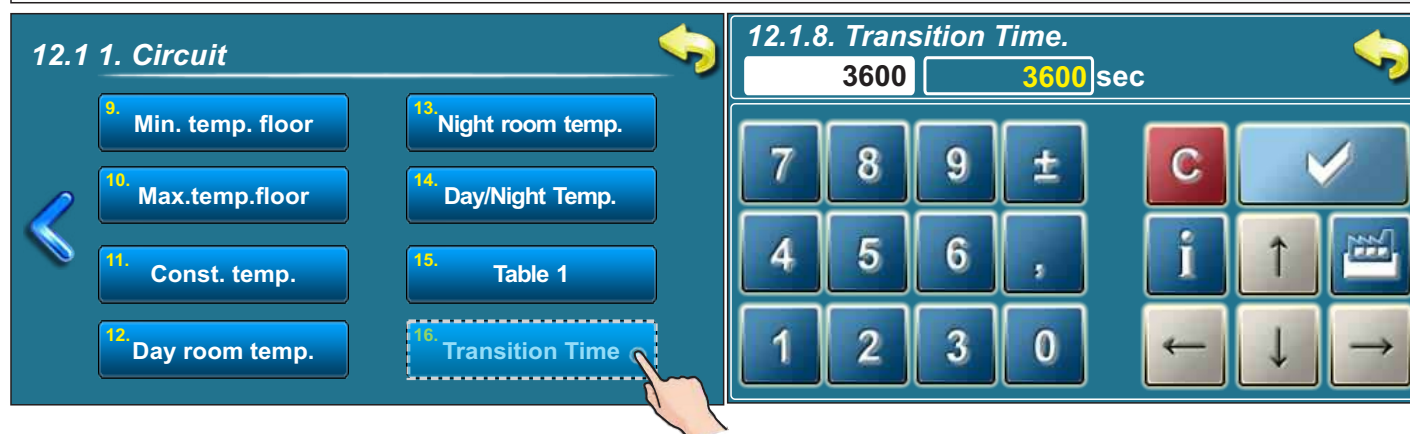

**Possible selection:**


- factory: **3600sec**
- Minimum: 0 sec
- Maximum: 18000 sec

This parameter is used only when configuration doesn't contain room corrector, because regulation doesn't have information of room temperature.

This parameter is time which is presumed that the system will achieve a given room temperature in a transition from day to night mode, and vice versa. So, this is time in which will "flow temperature" be optimally adjusted to achieve quick transition.





## 2. CIRCUIT

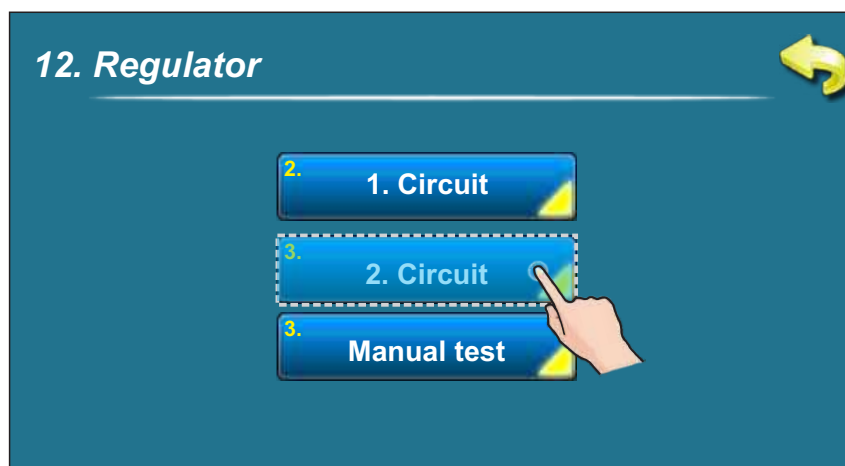



Setting parameters for 2+ circuit is done in same way like in 1+ circuit.

## MANUAL TEST

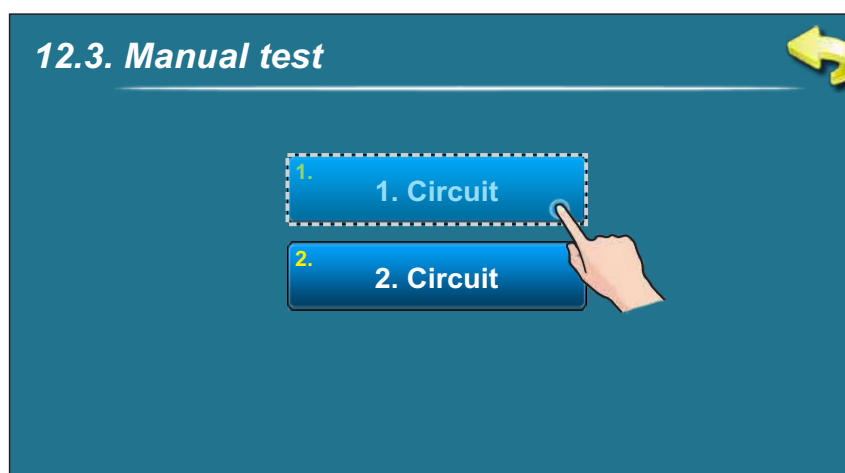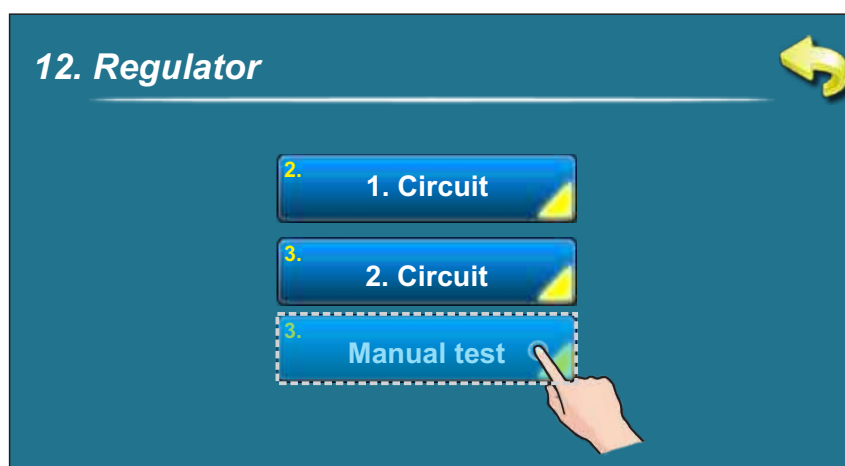

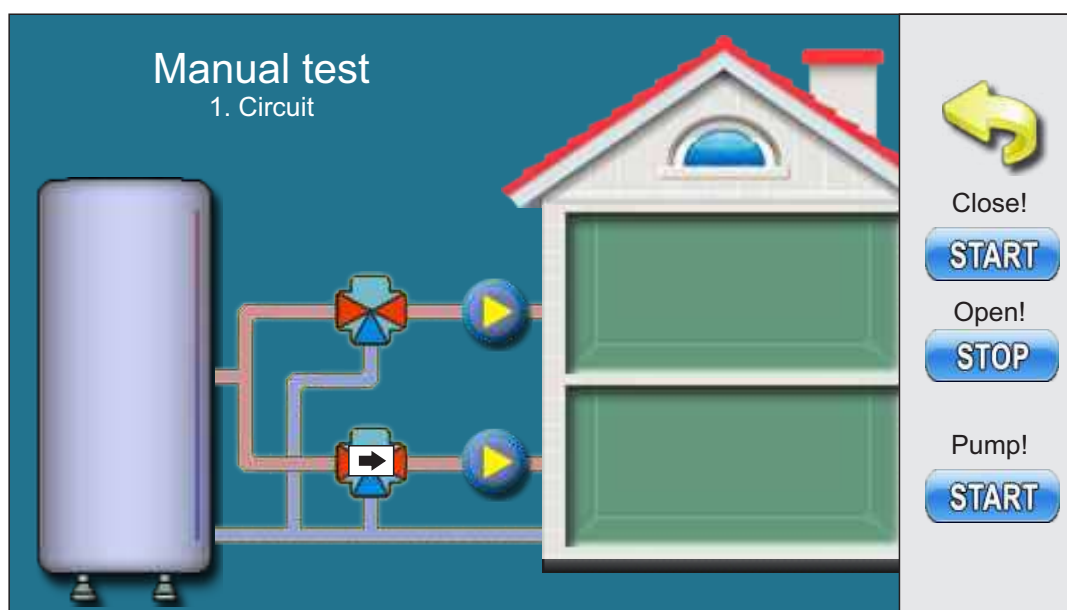

User can check the operation of all components of each heating circuit.



When clicked button **START** below text "Close" mixing valve should begin closing mixing valve and symbol  appear on the screen which means that mixing valve closes. When is "start" pressed and mixing valve closes, then button **START** becomes **STOP**. If you want to cancel the test you must press the button **STOP**.


When clicked button **START** below text "Open" mixing valve should begin opening mixing valve and symbol  appear on the screen which means that mixing valve opens. When is "start" pressed and mixing valve opens, then button **START** becomes **STOP**. If you want to cancel the test you must press the button **STOP**.

When clicked the button for **START** manual test pump, pump symbol  starts to rotate and pump works. Tipka **START** postaje **STOP**.


To exit from the manual test has to press the button .





**In the same way you can do manual test for 2+ circuit.**

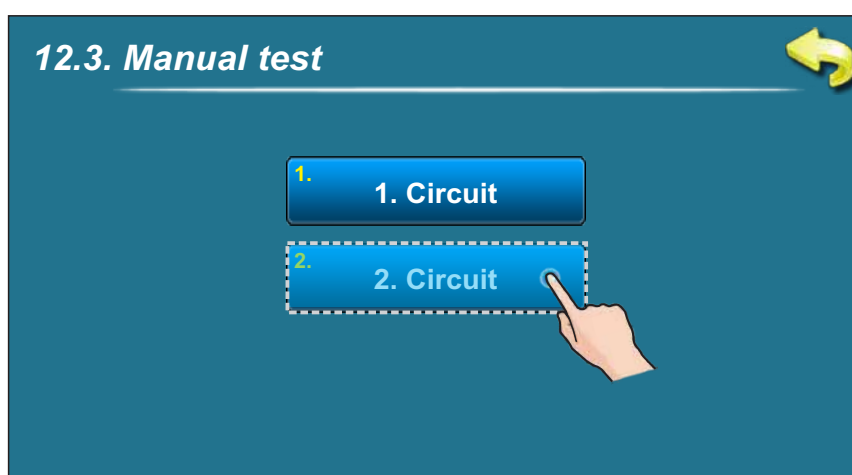

## ON THE SCREEN

It is possible to graphically monitor the operation of both heating circuits.  
To open the graphical window of 2 heating circuits, it is necessary to press the .

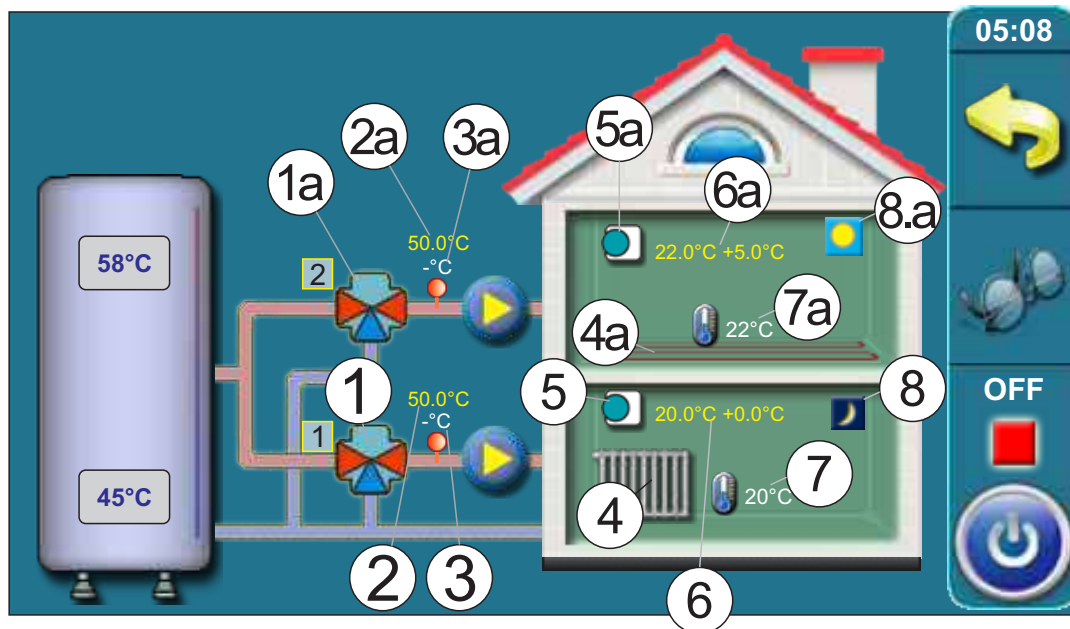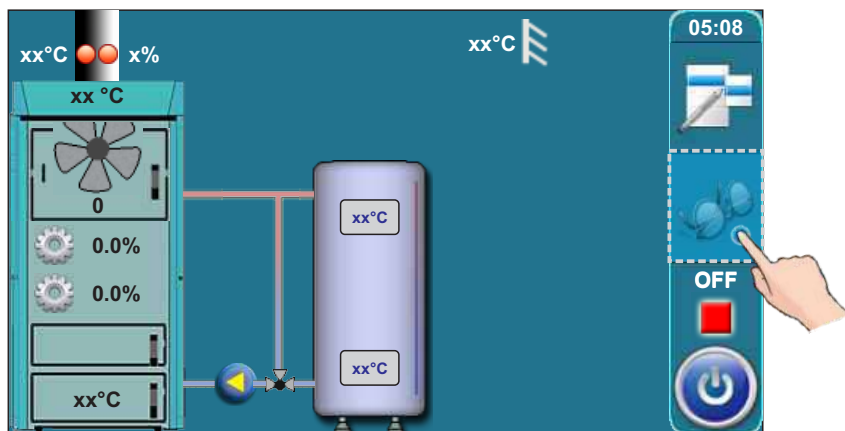

For each heating circuit can be specifically select items.

For example, you can Include / exclude heating circuits, turn on/off room corrector, choose heating type in each circuit (radiators / floor), choose the mode (day / night).

- |   |   |
|---|---|
| 1. Mixing valve (1.circuit)   | 6. The desired temperature + deviation by room corrector (1.circuit)                              |
| 2. The calculated flow temperature to achieve the the required room temperature (1.circuit) | 7. Current measured room temperature (shown only if the room corrector is turned on) in 1.circuit |
| 3. Current measured flow temperature (1.circuit)  | 8. Mode (1.circuit) (day / night)   |
| 4. Heating type on 1. circuit (radiators or floor heating)                                  |   |
| 5. Room corrector „CSK“ on 1. circuit (if turned off, icon disappears)                      |   |



**Items 1a - 8a have the same meaning as items 1-8 (described above) which only relate to 2. heating circuit.**





Company Centrometal d.o.o. assumes no responsibility for possible inaccuracies in this book originated typographical errors or rewriting, all the pictures and diagrams are principal and it is necessary to adjust each actual situation on the field, in any case the company reserves the right to enter their own products such modifications as considered necessary.

**Centrometal d.o.o. Glavna 12, 40306 Macinec, Croatia**

central tel: +385 40 372 600, fax: +385 40 372 611  
service tel: +385 40 372 622, fax: +385 40 372 621

**www.centrometal.hr**  
**e-mail: servis@centrometal.hr**

**Centrometal**  
HEATING TECHNIQUE