
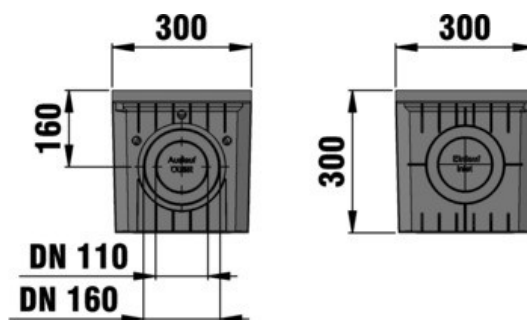


RECYFIX®POINT

RECYFIX®POINT 30/30, Point drainage, class B 125, with foul air trap, mud bucket and KG-pipe connection DN/OD 110, DN/OD 160, Construction height 300 mm with ductile iron grating, star design SW 12 mm, black

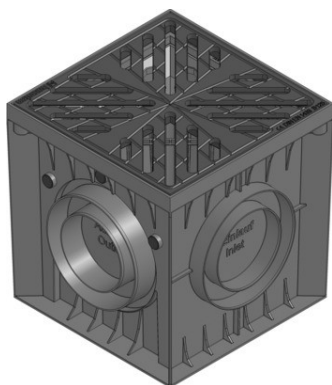

■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Item-no.
0	0	0	6,97	32184

■ Product description:

RECYFIX POINT 30/30 - construction height 300 mm, made of modified PP, with ductile iron grating made of spheroidal ductile iron GJS 500-7, star design, SW 12 mm, black, with foul air trap and sludge collecting bucket, with connection piece for PVC-U pipe outlet DN/OD 110/160, loading capacity A 15 - B 125, L/W/H 300x300x300 mm, item no. 32184

■ Material:


- **Channel body:**
- **Grating:** Ductile iron GJS 500-7

■ Set of rules:

in Anlehnung an EN 1433

■ Application areas:

- Gardening and landscaping
- Yard gullies

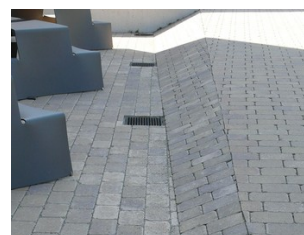

The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!