


Vertigo Steatite Essentiel

SPACE-SAVING WATER HEATER WITH FLAT DESIGN AND MULTIPosition INSTALLATION

Models 30 to 100 (multiposition installation)

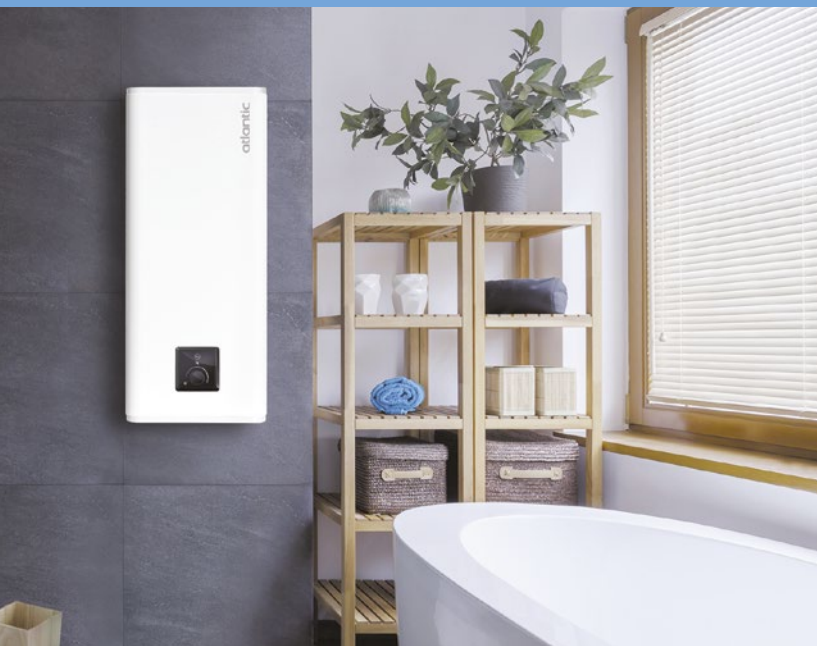


BENEFITS

- Space-saving solution due to flat design (less than 30 cm depth)
- Easy integration thanks to multiposition installation: vertical or horizontal mount
- With its double-tank structure, water heats faster, and your hot shower is ready in less than 50 minutes
- Steatite heating element protected by a sleeve for limited scaling and easier maintenance



Steatite
TECHNOLOGY

+ EASY PROGRAMMING WITH INTUITIVE INTERFACE

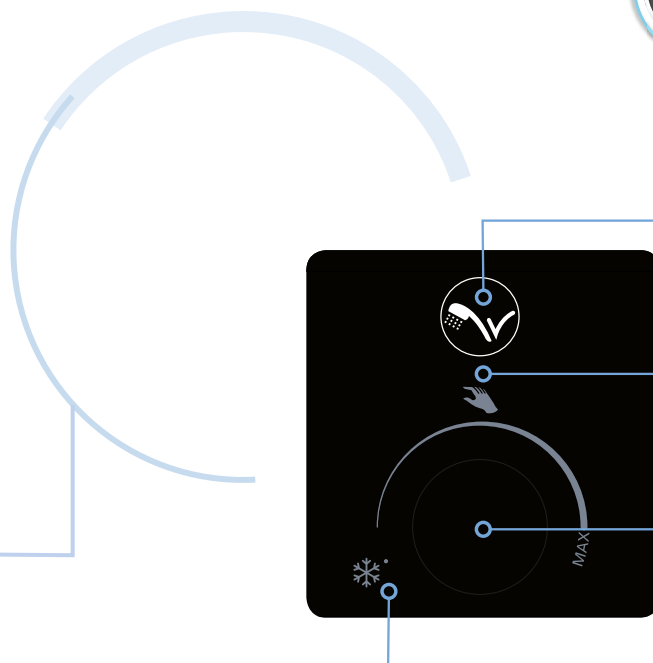

Shower-ready indicator:
Light is on when at least one shower is available

Quick mode selection control knob

Manual mode:
Manual selection of hot water quantity

Anti-frost mode (7°C)

Vertigo Steatite Essentiel

Models 30 to 100 (multiposition installation)

+ PROVEN QUALITY WITH STEATITE TECHNOLOGY



1 DIAMOND-QUALITY ENAMELLED TANK for long life and reliability

2 Optimized stainless steel outlet pipe

3 DOUBLE MAGNESIUM ANODE for protection against corrosion

4 Optimized Inlet diffuser


5 ELECTRONIC THERMOSTAT for temperature control accuracy

6 High density PU foam 0% CFC

Steatite
TECHNOLOGY

DRY STEATITE HEATING ELEMENT

for aggressive, highly mineralised and desalinated water. Its protective enamelled steel sleeve makes maintenance easy, and no need to ever drain the tank to replace it.




+ EASY INSTALLATION

Installation dimensions

Model	Dimensions (mm)						Flange opening (ø) mm
	Heigh (H)	Widht (W)	Depth ⁽¹⁾ (D)	A	B	C	
30	594	490	290	452	280	155	72
50	765	490	290	610	500	155	72
80	1090	490	290	975	700	115	72
100	1300	490	290	1185	800	115	72

(1) Without wall plate

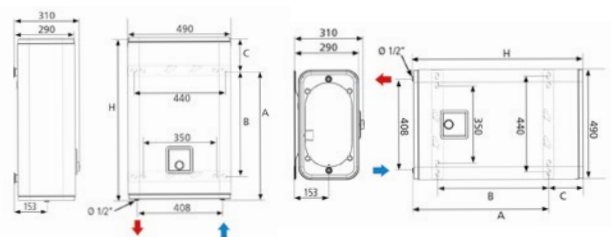

Technical data

Model	Number of users	Power output exit tank (W)	Power output entry tank (W)	Voltage	Total heat-up time $\Delta T=50^{\circ}\text{C}$ ($15^{\circ}\text{C} \rightarrow 65^{\circ}\text{C}$)	Heat-up time exit tank	Net weight (Kg)	Profile	ERP energy efficiency class
30	1 person	1000	1000	230	1h32	0h46	19.5	S	B
50	2 people	1500	1000	230	2h02	0h49	24.5	M	C
80	3 people	1500	1000	230	3h19	1h19	32.5	M	C
100	4 people	1500	1000	230	4h04	1h38	37.5	L	C

CE ENEC IP 24