

# REMS Swing

Single-hand tube bender

Practical one-hand pipe bender for dimensionally accurate bending of pipes up to 90°. Ideal for on-site work. For trade and industry. For the building site and the workshop.

Soft copper pipes, also thin-walled	Ø 10–22 mm Ø 3/8–7/8" s ≤ 1 mm
Coated soft copper tubes	Ø 10–18 mm Ø 3/8–5/8" s ≤ 1 mm
Soft, coated carbon steel pipes of the pressfitting systems	Ø 12–18 mm s ≤ 1.2 mm
Soft precision steel tubes	Ø 10–18 mm s ≤ 1 mm
Multi-layer composite tubes	Ø 14–32 mm

**REMS Swing – bending tubes where they are installed. Ultra light, ultra small, ultra handy. Universally usable for many pipe types. Ultra fast operation by practical multifunction lever for fast in-feed and fast return. Proven, reliable ratchet feed. Ideal also for coated tubes.**

## Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Also for copper thin-walled heating tubes according to EN 1057 and for tubes of pressfitting systems.

## Cost advantage

Bender recovered after a few bends through savings on fittings. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

## Design


Compact, job site-proven. Handy and light, drive unit only 0.9 kg. Can be used anywhere, free-hand, in confined areas. Easy, quick working, e.g. Ø 22 mm copper pipe bend in just 9 s. Marked bending formers for exact bending. Overbend, tier bend possible. Easy and rapid changing of bending formers. Back former support S Ø 10–26 mm, rotatable according to the size of the pipe to be bent, with back formers for pipes Ø 10–26 mm, 3/8–7/8". Back former support Ø 32 mm with back formers for pipe Ø 32 mm. Device for reverse bending up to Ø 22 mm, 7/8".

## Bending formers and sliding pieces

In high-strength, high-slide, glass-fibre reinforced polyamide. See table on page 129 for bending formers. UP bending formers with smaller bending radii for Uponor Uni Pipe PLUS composite pipes, see below.

## Drive

Sturdy drive unit with proven, reliable ratchet feed for the complete work range up to Ø 32 mm. Practical multi-function lever for fast in-feed and fast return saves time and effort.

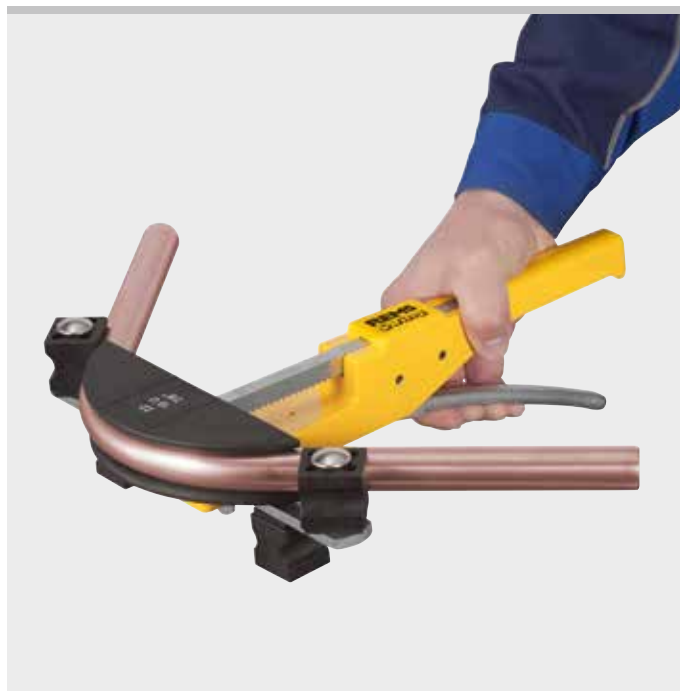

German Quality Product



Info



## Supply format

**REMS Swing UP Set.** Single-hand tube bender Ø 16–32 mm, up to 90°. for Uponor Uni Pipe PLUS composite pipes Ø 16–32 mm. With UP drive unit, UP bending formers with smaller bending radii, UP back former supports Ø 16–32 mm with back formers, in a sturdy steel box/case.

Description mm	Art.-No.
Set 16 + 20 + 25 + 32	153030

## Accessories

Description	Art.-No.
<b>REMS Swing UP</b> drive unit	153300
<b>UP back former support Ø 16–32 mm</b> with back formers for pipes Ø 16–32 mm	153307
<b>UP bending former Ø 16 mm</b> , bending radius 32 mm	153303
<b>UP bending former UP Ø 20 mm</b> , Biegeradius 40 mm	153304
<b>UP bending former UP Ø 25 mm</b> , Biegeradius 62,5 mm	153305
<b>UP bending former UP Ø 32 mm</b> , Biegeradius 80 mm	153306
<b>Steel case with inlay</b>	153265



### Supply format

**REMS Swing Set.** Single-hand tube bender Ø 10–32 mm, Ø 3/8–7/8", up to 90°. Soft copper pipes Ø 10–22 mm, Ø 3/8–7/8", s ≤ 1 mm, soft, coated copper pipes Ø 10–18 mm, Ø 3/8–5/8", s ≤ 1 mm, soft, coated carbon steel pipes of the pressfitting systems Ø 12–18 mm, s ≤ 1.2 mm, soft precision steel pipes Ø 10–18 mm, s ≤ 1 mm, composite tubes Ø 14–32 mm. Up to Ø 26 mm with drive unit, bending formers, back former supports S Ø 10–26 mm with back formers, in a sturdy steel box/case. Up to Ø 32 mm with drive unit, bending formers, 2 back former supports Ø 10–26 mm and Ø 32 mm with back formers, in a sturdy steel case.

Description mm	inch	Art.-No.
<b>Set 12 + 15 + 18 + 22</b>	1/2 + 5/8 + 3/4 + 7/8"	153025
<b>Set 10 + 12 + 15 + 18 + 22</b>	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153021
<b>Set 12 + 14 + 16 + 18 + 22</b>	1/2 + 3/4 + 7/8"	153020
<b>Set 14 + 16 + 20 + 25/26</b>		153026
<b>Set 14 + 16 + 18 + 20 + 25/26</b>		153022
<b>Set 16 + 20 + 25/26 + 32</b>		153029
<b>Set Allround 22</b>		
<b>10 + 12 + 14 + 15 + 16 + 17 + 18 + 20 + 22</b>	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153027
<b>Set 16 + 18 + 20 + 25/26 + 32</b>		153023
<b>Set Allround 32</b>		
<b>10 + 12 + 14 + 15 + 16 + 17 + 18 + 20 + 22 + 25/26 + 32</b>	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153028



### Accessories

Description	Art.-No.
<b>REMS Swing drive unit</b>	153100
<b>Back former support S Ø 10–26 mm</b> with back formers for pipes Ø 10–26 mm, 3/8–7/8"	153125
<b>Back former support Ø 32 mm</b> with back formers for pipe Ø 32 mm	153115
<b>Device for reverse bending</b> on laid pipes up to Ø 26 mm, 7/8"	153140
<b>Steel case with inlay</b>	153265
<b>Case with inlay</b>	153270

Bending former for tubes Ø mm/inch	Bending radius <sup>1)</sup> mm	suitable for					Art.-No.
		Cu	Cu-U	St 10305-U	St 10305	V	
10, 3/8"	30	●			●		153155
12, 10 U, 1/2"	36	●	●		●		153160
14, 12 U	50	●		●	●	●	153170
15, 12 U, 5/8"	55	●	●		●		153175
16, 14 U	55	●	●		●	●	153180
17, 15 U	60			●		●	153185
18, 14 U, 15 U, 16 U, 3/4"	72	●	●		●	●	153190
20, 18 U	79	●	●	●		●	153195
22, 18 U, 7/8"	86	●	●				153200
25, 26	88					●	153205
32	128					●	153210

<sup>1)</sup> Bending radius mm at the neutral axis of the bend (DVGW GW 392)

Cu: soft copper tubes, also thin-wall  
 St 10305-U: soft, coated carbon steel pipes of the pressfitting systems EN 10305-3  
 St 10305: soft precision steel pipes EN 10305-1, EN 10305-2, EN 10305-3  
 U: coated  
 V: multi-layer composite tubes of pressfitting systems



Effort-saving, oil-hydraulic hand pipe bender for dimensionally accurate bending of pipes up to 90°. Ideal for on-site work. For trade and industry. For the building site and the workshop.

Soft copper pipes, also thin-walled	Ø 10 – 22 mm Ø 3/8 – 7/8" s ≤ 1 mm
Coated soft copper tubes	Ø 10 – 18 mm Ø 3/8 – 5/8" s ≤ 1 mm
Pipes of press fitting systems made of: stainless steel, nickel steel	Ø 15 – 22 mm s ≤ 1.2 mm
Soft, coated carbon steel	Ø 12 – 18 mm s ≤ 1.2 mm
Soft precision steel tubes	Ø 10 – 22 mm s ≤ 1.5 mm
Multi-layer composite tubes	Ø 14 – 32 mm

**REMS Hydro-Swing – bending tubes where they are installed. Universally usable for many pipe types. Effortless working due to oil-hydraulic force transmission.**

#### Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Also for copper thin-walled heating tubes according to EN 1057 and for tubes of pressfitting systems.

#### Cost advantage

Bender recovered after a few bends through savings on fittings. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

#### Design


Robust, compact drive unit with closed, maintenance-free hydraulic system. Handy and light, only 2.4 kg. Can be used anywhere, even in confined spaces. Easy, quick working, e.g. Ø 22 mm copper pipe bend in just 18 s. Marked bending formers for exact bending. Overbend, tier bend possible. Easy and rapid changing of bending formers. Back former support H-S Ø 10 – 26 mm, rotatable according to the size of the pipe to be bent, with back formers for pipes Ø 10 – 26 mm, 3/8 – 7/8". Back former support Ø 32 mm with back formers for pipes Ø 32 mm.

#### Bending formers and sliding pieces

Bending formers and back formers made of high strength, high sliding, glass fibre reinforced polyamide or aluminium bending formers. See table on page 131 for bending formers.

#### Drive

Oil-hydraulic drive unit with hydraulic cylinder made from high-quality, rolled hydraulic tube. Ergonomically designed thrust lever for strength saving pressure build-up with manual hydraulic pump. Reliable hydraulic thrust with overload protection in the foremost piston position and overpressure valves for safe working.

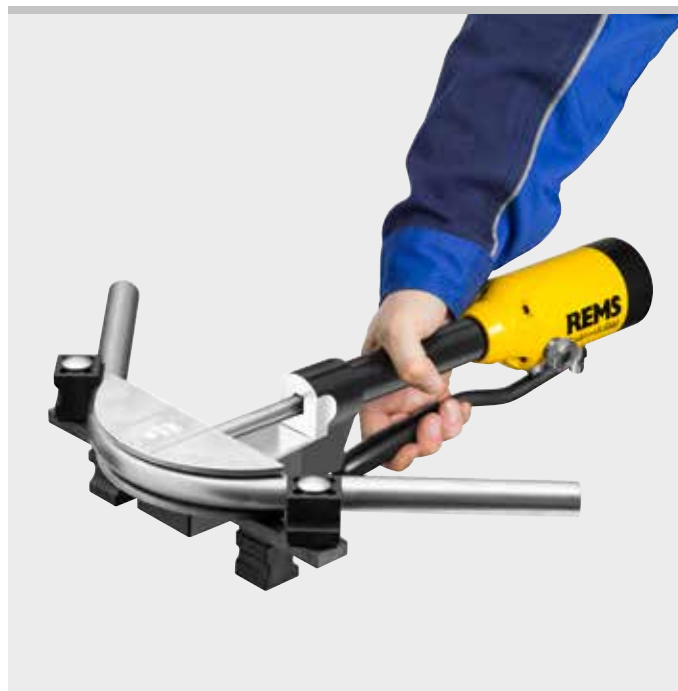

German Quality Product



Info

## Supply format

**REMS Hydro-Swing Set.** Oil-hydraulic hand pipe bender Ø 10–32 mm, Ø ¾–7/8", up to 90°. Soft copper pipes Ø 10–22 mm, Ø ¾–7/8", s ≤ 1 mm, soft, coated copper pipes Ø 10–18 mm, Ø ¾–5/8", s ≤ 1 mm, pipes of the press fitting systems made of soft, coated carbon steel Ø 12–18 mm, s ≤ 1.2 mm, soft precision steel pipes Ø 10–18 mm, s ≤ 1.5 mm, composite tubes Ø 14–32 mm. Up to Ø 26 mm with drive unit, polyamide bending formers, back former support H-S Ø 10–26 mm with back formers, in a sturdy case. Up to Ø 32 mm with drive unit, polyamide bending formers, 2 back former supports Ø 10–26 mm and Ø 32 mm with back formers, in a sturdy case.

Description mm	inch	Art.-No.
<b>Set 12 + 15 + 18 + 22</b>	½ + 5/8 + ¾ + 7/8"	153525
<b>Set 10 + 12 + 15 + 18 + 22</b>	¾ + ½ + 5/8 + ¾ + 7/8"	153521
<b>Set 12 + 14 + 16 + 18 + 22</b>	½ + ¾ + 7/8"	153520
<b>Set 14 + 16 + 20 + 25/26</b>		153526
<b>Set 14 + 16 + 18 + 20 + 25/26</b>		153522
<b>Set 16 + 20 + 25/26 + 32</b>		153529
<b>Set Allround 22</b>		
<b>10 + 12 + 14 + 15 + 16 + 17 + 18 + 20 + 22</b>	¾ + ½ + 5/8 + ¾ + 7/8"	153527
<b>Set 16 + 18 + 20 + 25/26 + 32</b>		153523
<b>Set Allround 32</b>		
<b>10 + 12 + 14 + 15 + 16 + 17 + 18 + 20 + 22 + 25/26 + 32</b>	¾ + ½ + 5/8 + ¾ + 7/8"	153528



## Supply format

**REMS Hydro-Swing INOX Set.** REMS Hydro-Swing with aluminium bending formers, especially also for Geberit Mapress Stainless Steel (EN 10088, 1.4401), Geberit Mapress Stainless Steel (EN 10088, 1.4521, nickel-free), Geberit Mapress Carbon Steel (EN 10305-3, 1.0034 (E195)), Viega Sanpress (EN 10088, 1.4401), Viega Prestabo (EN 10305-3, 1.0308 (E235)).

Description mm	Art.-No.
<b>Set 15 + 18 + 22</b>	153510

## Accessories

Description	Art.-No.
<b>REMS Hydro-Swing drive unit</b>	153500
<b>Back former support H-S Ø 10–26 mm</b> with back formers for pipe Ø 10–26 mm, ¾–7/8"	153501
<b>Back former support Ø 32 mm</b> with back formers for pipe Ø 32 mm	153115
<b>Case with inlay</b>	153570

Bending former for tubes Ø mm/inch	Bending radius <sup>1)</sup> mm	suitable for						Art.-No.
		Cu	Cu-U	St 10217	St 10305	St 10305-U	V	
10, ¾"	30	●			●			153155
12, 10 U, ½"	36	●	●		●			153160
14, 12 U	50	●			●	●	●	153170
15 <sup>2)</sup>	55	●	●	●	●			153531
15, 12 U, 5/8"	55	●	●		●			153175
16, 14 U	55	●	●				●	153180
17, 15 U	60					●	●	153185
18 <sup>2)</sup>	72	●	●	●	●		●	153532
18, 14 U, 15 U, 16 U, ¾"	72	●	●		●		●	153190
20, 18 U	79	●	●			●	●	153195
22, 18 U, 7/8" <sup>2)</sup>	86	●	●	●	●			153540
22, 18 U, 7/8"	86	●	●					153200
25, 26	88						●	153205
32	128						●	153210

<sup>1)</sup> Bending radius mm at the neutral axis of the bend (DVGW GW 392)

<sup>2)</sup> Aluminium bending formers

- Cu: soft copper tubes, also thin-wall, EN 1057
- St 10217: stainless, nickel steel pipes of the press fitting systems EN 10217-7, EN 10312, series 2, material 1.4401
- St 10305: soft precision steel pipes EN 10305-1, EN 10305-2, EN 10305-3
- St 10305-U: soft, coated carbon steel pipes of the pressfitting systems EN 10305-3
- U: coated
- V: multi-layer composite tubes of pressfitting systems



# REMS Hydro-Swing 22V

Cordless tube bender

Universal, mobile, handy electric tool for dimensionally accurate bending of pipes up to 90°. Ideal for on-site work. For trade and industry. For the building site and the workshop. Li-Ion 22V Technology. For battery and corded operation.

Soft copper pipes, also thin-walled	Ø 10 – 22 mm Ø 3/8 – 7/8" s ≤ 1 mm
Coated soft copper tubes	Ø 10 – 18 mm Ø 3/8 – 5/8" s ≤ 1 mm
Pipes of press fitting systems made of: stainless steel, nickel steel	Ø 15 – 22 mm s ≤ 1.2 mm
Soft, coated carbon steel	Ø 12 – 18 mm s ≤ 1.2 mm
Soft precision steel tubes	Ø 10 – 22 mm s ≤ 1.5 mm
Multi-layer composite tubes	Ø 14 – 32 mm

**REMS Hydro-Swing 22V – bending tubes where they are installed. Mobile, handy, light. Universally usable for many pipe types. Li-Ion 21.6V, 2.5Ah battery, for approx. 110 stainless steel pipe bends of the Ø 22 mm press fitting systems with one battery charge\*.**

## Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Also for copper thin-walled heating tubes according to EN 1057 and for tubes of pressfitting systems.

## Cost advantage

Cordless tube bender recovered after a few bends through savings on fittings. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

## Design

Robust, compact drive unit with closed, maintenance-free hydraulic system. Mobile, handy, light. Drive machine with battery pack weights only 3.0 kg. Can be used anywhere, even in confined spaces. Easy, quick working, e.g. Ø 22 mm stainless steel pipe bend in just 8 s. Marked bending formers for exact bending. Overbend, tier bend possible. Easy and rapid changing of bending formers. Back former support H-S Ø 10 – 26 mm, rotatable according to the size of the pipe to be bent, with back formers for pipes Ø 10 – 26 mm, 3/8 – 7/8". Back former support Ø 32 mm with back formers for pipes Ø 32 mm. LED work light for illuminating the work place.

## Bending formers and sliding pieces

Bending formers and back formers made of high strength, high sliding, glass fibre reinforced polyamide or aluminium bending formers. See table on page 133 for bending formers.

## Drive

Tons of thrust for crease-free bending within seconds. Thrust force 9 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

## Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-Ion 21.6V, 2.5 Ah battery for approx. 110 pipe bends, 4.4 Ah for approx. 190 pipe bends, 5.0 Ah for approx. 220 pipe bends, 9.0 Ah for approx. 396 pipe bends of the stainless steel Ø 22 mm press fitting systems with one battery charge\*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 – 240V, 90W. Rapid charger 100 – 240V, 290W, for shorter charging times, as accessory. Voltage supply 220 – 240V/21.6V, 15A output, for mains operation instead of Li-Ion battery 21.6 V, as accessory.

## Supply format

**REMS Hydro-Swing 22V INOX Set.** REMS Hydro-Swing 22V with aluminium bending formers, especially also for Geberit Mapress Stainless Steel (EN 10088, 1.4401), Geberit Mapress Stainless Steel (EN 10088, 1.4521, nickel-free), Geberit Mapress Carbon Steel (EN 10305-3, 1.0034 (E195)), Viega Sanpress (EN 10088, 1.4401), Viega Prestabo (EN 10305-3, 1.0308 (E235)).

Description mm	Art.-No.
Set 15 + 18 + 22	153419

Other voltages on request.



German Quality Product



Info





# REMS Hydro-Swing 22 V

Cordless tube bender

## Supply format

**REMS Hydro-Swing 22 V Set.** Cordless tube bender Ø 10–32 mm, Ø ⅜–⅞", up to 90°. Soft copper pipes Ø 10–22 mm, Ø ⅜–⅞", s ≤ 1 mm, soft, coated copper pipes Ø 10–18 mm, Ø ⅜–⅝", s ≤ 1 mm, pipes of the press fitting systems made of soft, coated carbon steel Ø 12–18 mm, s ≤ 1.2 mm, soft precision steel pipes Ø 10–18 mm, s ≤ 1.5 mm, composite tubes Ø 14–32 mm. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 220–240V or 110 V, 50–60 Hz, 70 W. Up to Ø 26 mm with polyamide bending formers, back former support H-S Ø 10–26 mm with back formers. Up to Ø 32 mm with polyamide bending formers, 2 back former supports Ø 10–26 mm and Ø 32 mm with back formers. In XL-Boxx system case.

Description mm	inch	Art.-No.
<b>Set 12 + 15 + 18 + 22</b>	½ + ⅝ + ¾ + ⅞"	153410
<b>Set 10 + 12 + 15 + 18 + 22</b>	⅜ + ½ + ⅝ + ¾ + ⅞"	153411
<b>Set 12 + 14 + 16 + 18 + 22</b>	½ + ⅜ + ⅞"	153412
<b>Set 14 + 16 + 20 + 25/26</b>		153413
<b>Set 14 + 16 + 18 + 20 + 25/26</b>		153414
<b>Set 16 + 20 + 25/26 + 32</b>		153415
<b>Set Allround 22</b>		
<b>10 + 12 + 14 + 15 + 16 + 17 + 18 + 20 + 22</b>	⅜ + ½ + ⅝ + ¾ + ⅞"	153416
<b>Set 16 + 18 + 20 + 25/26 + 32</b>		153417
<b>Set Allround 32</b>		
<b>10 + 12 + 14 + 15 + 16 + 17 + 18 + 20 + 22 + 25/26 + 32</b>	⅜ + ½ + ⅝ + ¾ + ⅞"	153418
<b>Basic-Pack</b> (ohne Biegesegmente und Gleitstücke)		153401

Other voltages on request.



## Accessories

Description	Art.-No.
<b>REMS Hydro-Swing 22 V drive unit, without battery</b>	153400
<b>Back former support H-S Ø 10–26 mm</b> with back formers for pipe Ø 10–26 mm, ⅜–⅞"	153501
<b>Back former support Ø 32 mm</b> with back formers for pipe Ø 32 mm	153115
<b>Battery Li-Ion 21.6 V, 2.5 Ah</b>	571571
<b>Battery Li-Ion 21.6 V, 4.4 Ah</b>	571574
<b>Battery Li-Ion 21.6 V, 5.0 Ah</b>	571581
<b>Battery Li-Ion 21.6 V, 9.0 Ah</b>	571583
<b>Rapid charger 100–240 V, 50–60 Hz, 90 W</b>	571585
<b>Rapid charger 100–240 V, 50–60 Hz, 290 W</b>	571587
<b>Voltage supply 220–240 V/21.6 V, 50–60 Hz, 15 A</b> , for mains operation instead of battery Li-Ion 21.6 V	571567
<b>XL-Boxx system case</b> with inserts	153455

Bending former for tubes Ø mm/inch	Bending radius <sup>1)</sup> mm	suitable for					V
		Cu	Cu-U	St 10217	St 10305	St 10305-U	
10, ⅜"	30	●			●		153155
12, 10 U, ½"	36	●	●		●		153160
14, 12 U	50	●			●	●	153170
15 <sup>2)</sup>	55	●	●	●	●		153531
15, 12 U, ⅝"	55	●	●		●		153175
16, 14 U	55	●	●		●	●	153180
17, 15 U	60					●	153185
18 <sup>2)</sup>	72	●	●	●	●	●	153532
18, 14 U, 15 U, 16 U, ¾"	72	●	●		●	●	153190
20, 18 U	79	●	●			●	153195
22, 18 U, ⅞" <sup>2)</sup>	86	●	●	●	●		153540
22, 18 U, ⅞"	86	●	●				153200
25, 26	88					●	153205
32	128					●	153210

<sup>1)</sup> Bending radius mm at the neutral axis of the bend (DVGW GW 392)

<sup>2)</sup> Aluminium bending formers

- Cu: soft copper tubes, also thin-wall, EN 1057
- St 10217: stainless, nickel steel pipes of the press fitting systems EN 10217-7, EN 10312, series 2, material 1.4401
- St 10305: soft precision steel pipes EN 10305-1, EN 10305-2, EN 10305-3
- St 10305-U: soft, coated carbon steel pipes of the pressfitting systems EN 10305-3
- U: coated
- V: multi-layer composite tubes of pressfitting systems



\* Ambient temperature approx. 20°C.

Robust, oil-hydraulic pipe bender for dimensionally accurate bending of pipes up to 90°. For trade and industry. For the building site and the workshop.

Steel pipes EN 10255	Ø 3/8 – 2"
Multilayer composite tubes	Ø 32 – 75 mm

**REMS Python – extremely easy bending up to Ø 2", 75 mm. Ideal for steel pipes EN 10255 and for multilayer composite tubes of the pressfitting systems. Also for producing level bends in different planes.**

### Universal use

For locksmith work, sanitary and heating installation and machine and plant engineering. Excellently suitable for steel pipes EN 10255 and for multilayer composite tubes of the pressfitting systems.

### System advantage

Only **one** bender drive for the whole working range up to Ø 2", Ø 75 mm. Thus simple, inexpensive stocking. No confusion possible.

### Cost advantage

Pipe bender is amortised after just a few bends by saving on fittings. No costs for fittings, storage, procurement. Saving of welds, press connections and working time. Increased safety due to fewer pipe connections.

### Design

Robust, oil-hydraulic drive unit with closed, maintenance-free hydraulic system. 2 slide roller supports and 2 slide rollers form a closed bending frame for high rigidity and precision when bending. Upper back former support tiltable for easy insertion and removal of the pipe, with marked plug positions for the back formers according to the pipe size to be bent, with angle scale 0 to 90°. Upper slide roller support with laterally adjustable slide roller bearing plate for producing over-bends and level bends according to requirements also in different planes. Can be used anywhere, any time. No setting. Easy, effortless, quick working, e.g. 90° bend Ø 63 mm only 60 s. Tripod as accessory.

### Bending formers and back formers

Bending formers St for steel pipes, form and pressure stable, made of highly resistant spheroidal iron. Bending formers V for multilayer composite tubes, form and pressure stable, made of torsion-free shell-cast aluminium. See page 135. Marking on every bending former for dimensionally accurate bending. Angle gauge with angle scale 0 to 180° for dimensionally accurate bending, as an accessory. Optimum matching of bending formers and back formers guarantees material-compatible bending without cracks and creases. High strength back formers for low friction support of the thrust pressure. Fast changing of the bending formers and back formers by simple plug system.

### Drive

Oil-hydraulic drive unit with hydraulic cylinder made from high-quality, rolled hydraulic tube. Overload protection of the hydraulic thrust in the foremost piston position and overpressure valves for safe working. Ergonomically designed thrust lever for strength saving pressure build-up with manual hydraulic pump. No danger of crushing due to end limiting of the thrust lever, for high work safety.



German Quality Product



Bridges.





Doglegs on several levels.



### Supply format

**REMS Python Set.** Oil-hydraulic pipe bender for dimensionally accurate bending of pipes up to 90°. Steel pipes EN 10255 Ø ¾ – 2", multilayer composite tubes Ø 32 – 75 mm. Drive unit with back former supports, upper back former support with laterally adjustable back former support bearing plate, 2 back formers, bending formers St or V. In sturdy carrying case.

Description	Art.-No.
<b>Set St ¾ + ½ + ¾ + 1 + 1½"</b>	590020
<b>Set St ½ + ¾ + 1 + 1½ + 2"</b>	590021
<b>Set V 40 + 50 + 63 mm</b>	590022

### Accessories

Description	Art.-No.
<b>Drive unit</b> with back former supports and back formers	590000
<b>Slide piece Ø 75 mm (pack of 2)</b>	590111
<b>Tripod</b>	590150
<b>Carrying case</b> with practical handles	590160
<b>Angle gauge</b> for dimensionally accurate bending	590153

Bending former for pipes Ø mm/inch	Bending radius <sup>1)</sup> mm	Bending radius <sup>2)</sup> mm	suitable for					Art.-No.
			St 10255	>				
St ¾"	50		●					590051
St ½"	65		●					590052
St ¾"	85		●					590053
St 1"	100		●					590054
St 1¼"	150		●					590055
St 1½"	170		●					590056
St 2"	220		●					590057
V 32 mm	112	128		●				590061
V 40 mm	140	160		●				590058
V 50 mm	175	200		●				590059
V 63 mm	220	252		●				590060
V 75 mm	260	298		▲				590062

St 10255: Steel pipes (threaded pipes) EN 10255  
 V: multilayer composite pipes of the pressfitting systems  
 ▲ 2 slide pieces Ø 75 mm (Art. No. 590111) required

<sup>1)</sup> Bending radius mm on the inside of the bend (EN 10255)

<sup>2)</sup> Bending radius mm at the neutral axis of the bend (DVGW VP 632)





Universal, compact electric tool for cold bending of pipes and tubes up to 180°. Can be used anywhere, without vice. For trade and industry. For the building site and the workshop.

Hard, half-hard, soft copper tubes also thin-wall	Ø 10 – 35 mm Ø 3/8 – 1 3/8"
--	--------------------------------

Coated soft copper tubes, also thin-wall	Ø 10 – 18 mm
---	--------------

Thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735-1	Ø 3/8 – 1 3/8"
--	----------------

Pipes of press fitting systems made of stainless steel	Ø 12 – 28 mm
---	--------------

Carbon steel (coated)	Ø 12 – 28 mm
-----------------------	--------------

Soft precision steel tubes	Ø 10 – 28 mm
----------------------------	--------------

Steel pipes EN 10255	Ø 1/4 – 3/4"
----------------------	--------------

Electric conduit EN 50086	Ø 16 – 32 mm
---------------------------	--------------

Multi-layer composite tubes	Ø 14 – 40 mm
-----------------------------	--------------

**REMS Curvo – wrinkle-free bending.**  
**Universal for many pipe types. Instant use without setting. Fast and creep speed operation for precise bending. Rapid change of bending and back formers.**

### Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Specially suited for tubes of pressfitting systems, for hard and half-hard copper tubes and for thin-walled copper heating tubes according to EN 1057.

### System advantage

Only one type of bending and back formers for REMS Curvo 22V, REMS Curvo, REMS Curvo 50 and REMS Sinus. Therefore simple, inexpensive stocking. No confusion possible.

### Cost advantage

Bender cost recovered after a small number of bends. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

### Design

Compact, handy electric tool with integral absorption of torque during bending. Super light, drive unit only 8 kg. Can be used anywhere, anytime. No setting. Simple, effortless, fast working, e.g. 90° bends, Ø 22 mm in only 6 s. Fast and creep speed operation for precise bending. Overbend, double bend, tier bend, reversed bend possible. Height adjustable machine support as accessory.

### Bending formers and back formers

Form and pressure resistant, in high-strength, high-slide, glass-fibre reinforced polyamide. Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale 0 to 180° provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers. Bending formers and back formers for different sizes, materials and bending radii (page 143).

### Drive

Robust, maintenance-free gear. Final point safety in both directions through safety slipping clutch. Proven, powerful universal motor, 1000 W. Right and left-hand rotation. Stepless electronic safety switch for rapid and creep speed operation.

### Bending lubricant

REMS bending spray ensures a permanent lubricating film for reducing energy expenditure and uniform bending. High-pressure-proof, acid-free, CFC-free, so ozone-harmless.



German Quality Product



Info



### Supply format

**REMS Curvo Set.** Electric pipe and tube bender  $\varnothing$  10–40 mm,  $\varnothing$   $\frac{1}{4}$ – $1\frac{1}{8}$ ", up to 180°. Hard, semi-hard, soft copper pipes, also thin-walled,  $\varnothing$  10–35 mm,  $\varnothing$   $\frac{3}{8}$ – $1\frac{1}{8}$ ", soft coated copper pipes, also thin-walled,  $\varnothing$  10–18 mm, thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735-1  $\varnothing$   $\frac{3}{8}$ – $1\frac{1}{8}$ ", pipes of the press fitting systems of stainless steel  $\varnothing$  12–28 mm, carbon steel, also coated,  $\varnothing$  12–28 mm, soft precision steel pipes  $\varnothing$  10–28 mm, steel pipes EN 10255  $\varnothing$   $\frac{1}{4}$ – $\frac{3}{4}$ ", electrical installation pipes EN 50086  $\varnothing$  16–32 mm, composite tubes  $\varnothing$  14–40 mm, etc. Drive unit with maintenance-free gear and safety slipping clutch, universal motor 230 V or 110 V, 50–60 Hz, 1000 W, stepless electronic safety switch, right and left-hand rotation, insert bolt. Bending formers and back formers. In sturdy steel case.

Description	Art.-No.
Set 15 + 18 + 22	580026
Set 15 + 18 + 22 + 28 <sup>1)</sup>	580027
Set 15 + 18 + 22 + 28 <sup>2)</sup>	580036
Set 15 + 18 + 22 + 28 <sup>3)</sup>	580035
Set 12 + 15 + 18 + 22	580020
Set 12 + 15 + 18 + 22 + 28 <sup>1)</sup>	580033
Set 12 + 15 + 18 + 22 + 28 <sup>2)</sup>	580037
Set 15 + 22 + 28 <sup>1)</sup>	580022
Set 15 + 22 + 28 <sup>2)</sup>	580040
Set 17 + 20 + 24	580023
Set 12 + 14 + 16 + 18 + 22	580021
Set 12 + 14 + 16 + 18 + 22 + 28 <sup>1)</sup>	580031
Set 12 + 14 + 16 + 18 + 22 + 28 <sup>2)</sup>	580038
Set 14 + 16 + 18 + 22 + 28 <sup>1)</sup>	580028
Set 14 + 16 + 18 + 22 + 28 <sup>2)</sup>	580039
Set $\frac{3}{8}$ + $\frac{1}{2}$ + $\frac{5}{8}$ + $\frac{3}{4}$ + $\frac{7}{8}$ "	580024
Set 16 + 20 + 26 + 32	580025
Set 16 + 20 + 25 + 32	580034
Set 20 + 25 + 32	580029
Set 32 + 40	580030
<b>Basic-Pack</b> (without bending and back formers)	580010

REMS Curvo Set delivered with the smaller radius bending and back former (except Art.-No. 580029 and 580030), see page 143.

<sup>1)</sup> Bending former and back former 28, R102, Art. No. 581070, for hard, semi-hard copper pipes, also thin-walled. See page 143.

<sup>2)</sup> Bending former and back former 28,  $\frac{3}{4}$ " (DN 20), R102, Art. No. 581260, for hard copper pipes  $\varnothing$  28 mm,  $\varnothing$   $1\frac{1}{8}$ ", pipes of the press fitting systems of stainless steel/carbon steel  $\varnothing$  28 mm, steel pipes  $\frac{3}{4}$ ". See page 143.

<sup>3)</sup> Bending former and back former 28,  $\frac{3}{4}$ " (DN 20), R114, Art. No. 581310, for hard, semi-hard copper pipes  $\varnothing$  28 mm, pipes of the press fitting systems of stainless steel/carbon steel  $\varnothing$  28 mm, steel pipes  $\frac{3}{4}$ ". According to DVGW work sheet GW 392 for hard and semi-hard copper pipes  $\varnothing$  28 mm minimum bending radius 114 mm necessary. Wall thickness  $\geq$  0.9 mm. See page 143.

### Accessories

Description	Art.-No.
<b>Bending formers and back formers</b> see page 143.	
<b>REMS Curvo drive unit</b>	580000
<b>Insert bolt</b>	582036
<b>REMS bending spray</b> , 400 ml	140120
<b>Steel case</b> with insert	586000
<b>Machine support 3B</b> , height adjustable, on tripod	586100
<b>Machine support WB</b> , height adjustable, for mounting on work bench	586150



Basic-Pack



3B



WB

Universal, compact electric tool for cold bending of pipes and tubes up to 90°. Can be used anywhere, without vice. For trade and industry. For the building site and the workshop.

Steel pipes EN 10255 (DIN 2440)	Ø ¼ – 1¼"
Stainless steel pipes EN ISO 1127, EN 10217-1	Ø ½ – 1¼" s ≤ 2.6 mm
Hard, half-hard, soft copper tubes	Ø 10 – 42 mm
Thin-wall copper tubes	Ø 10 – 35 mm
Thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735-1	Ø ¾ – 1⅝"
Pipes of press fitting systems made of stainless steel	Ø 12 – 42 mm
Carbon steel, also coated	Ø 12 – 42 (28) mm
Multi-layer composite tubes	Ø 14 – 50 mm
Further materials, see REMS Curvo	



## REMS Curvo 50 – wrinkle free bending of large pipes.

### Universal use

For metalwork and in sanitary, heating, air conditioning, refrigeration and hydraulic applications. Specially suited for steel pipe EN 10255, pipe for press-fitting systems, for hard and half hard copper pipe and for thin-walled copper heating pipe according to EN 1057.

### System advantage

Bending formers and back formers of REMS Curvo 22V, REMS Curvo and REMS Sinus (page 143) also fit in the REMS Curvo 50 drive machine with adaptor block 10–40, support 10–40. Therefore simple, inexpensive stocking. No confusion possible.

### Cost advantage

Bender cost recovered after a small number of bends. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

### Design

Compact, handy electric tool with integral absorption of torque during bending. Can be used anywhere, anytime. No setting. Simple, effortless, fast working, e.g. 90° bends of steel pipe Ø 1¼" in only 37 s. Fast and creep speed operation for precise bending. Overbend, tier bend, reversed bend possible.

### Bending formers and back formers

Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers. Bending formers and back formers for different sizes, materials and bending radii (page 143). Bending formers and back formers REMS Curvo 50 (Ø 35 R 100, Ø 42 R 140, Ø 50 R 135, Ø 1" R 100, Ø 1¼" R 140): Form and pressure resistant bending formers in ductile iron and back formers in high-strength, high-slide glass-fibre reinforced polyamide.

### Drive

Robust, maintenance-free gear. Final point safety in both directions through safety slipping clutch. Proven, powerful universal motor, 1000 W. Right and left-hand rotation. Stepless electronic safety switch for rapid and creep speed operation.

### Bending lubricant

REMS bending spray ensures a permanent lubricating film for reducing energy expenditure and uniform bending. High-pressure-proof, acid-free. CFC-free, so ozone-harmless.



German Quality Product



## Supply format

**REMS Curvo 50 Basic-Pack.** Electric pipe and tube bender Ø 10–50 mm, up to 90°. Steel pipes EN 10255 Ø ¼–1¼", stainless steel pipes EN ISO 1127, EN 10217-7, Ø ½–1¼", s ≤ 2.6 mm, hard, semi-hard, soft copper pipes, Ø 10–42 mm, thin-walled copper pipes Ø 10–35 mm, thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735-1 Ø ¾–1½", pipes of the press fitting systems of stainless steel Ø 12–42 mm, carbon steel Ø 12–42 mm, coated carbon steel Ø 12–28 mm, composite tubes Ø 14–50 mm, etc. Drive unit with maintenance-free gear and safety slipping clutch, universal motor 230 V or 110 V, 50–60 Hz, 1000 W, stepless electronic safety switch, right and left-hand rotation. Adaptor block 35–50, Support 35–50, insert bolt. In sturdy carrying case.

	Art.-No.
	580110

Other voltages on request.



## Accessories

Description	Art.-No.
<b>Bending formers and back formers</b> see page 143.	
<b>REMS Curvo 50 drive unit</b>	580100
<b>Adaptor block 35–50, Support 35–50</b> , for bending formers and back formers Ø 35 R 100, Ø 42 R 140, Ø 50 R 135, Ø 1" R 100, Ø 1¼" R 140 (see page 143).	582110
<b>Adaptor block 10–40, Support 10–40</b> , for bending formers and back formers REMS Curvo, REMS Curvo 22V, REMS Sinus (see page 143).	582120
<b>Insert bolt</b>	582036
<b>REMS bending spray</b> , 400 ml	140120
<b>Carrying case</b> with practical handles	590160
<b>Steel case</b> with insert for each bending former and back former R 100 and R 135/R 140, 90°	586012





# REMS Curvo 22V

Cordless tube bender

Universal, mobile electric tool for cold bending of pipes up to 180°. Can be used anywhere, without vice. For trade and industry. For the building site and the workshop. Li-Ion 22V Technology. For battery and corded operation.

Hard, half-hard, soft copper tubes also thin-wall	Ø 10–28 mm Ø 3/8–1 1/8"
Coated soft copper tubes, also thin-wall	Ø 10–18 mm
Thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735-1	Ø 3/8–1 1/8"
Pipes of press fitting systems made of stainless steel	Ø 12–28 mm
Carbon steel, also coated	Ø 12–28 mm
Soft precision steel tubes	Ø 10–28 mm
Steel pipes EN 10255	Ø 1/4–3/4"
Electric conduit EN 50086	Ø 16–25 mm
Multi-layer composite tubes	Ø 14–40 mm

**REMS Curvo 22V – wrinkle-free bending of pipes. Mobile, handy, light. Universal for many pipe types. Ready to use immediately without setting. Fast and creep speed with immediate stop for precise bending. Quick change of bending and back formers. Li-Ion 21.6V, 5.0Ah battery, for approx. 90 pipe bends of the stainless steel Ø 22 mm press fitting systems with one battery charge\*.**

## Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Mains independent. Specially suited for tubes of pressfitting systems, for hard and half-hard copper tubes and for thin-walled copper heating tubes according to EN 1057.

## System advantage

Only one type of bending and back formers for REMS Curvo 22V, REMS Curvo, REMS Curvo 50 and REMS Sinus. Therefore simple, inexpensive stocking. No confusion possible.

## Cost advantage

Bender cost recovered after a small number of bends. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

## Design

Compact, mobile, handy electric tool with integral absorption of torque during bending. Super light, drive machine with battery pack weights only 8.5 kg. Electronic charging status check with low discharge protection. Practical D-shaped handle with soft grip. Can be used anywhere, anytime. No setting. Simple, effortless, fast working, e.g. 90° bend Ø 22 mm only 6 s. Fast and creep speed with immediate stop for precise bending. Overbend, double bend, tier bend, reversed bend possible. Height adjustable machine support as accessory.

## Bending formers and back formers

Form and pressure resistant, in high-strength, high-slide, glass-fibre reinforced polyamide. Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale 0 to 180° provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers. Bending formers and back formers for different sizes, materials and bending radii (page 143).

## Drive

Robust, maintenance-free gear. Final point safety in both directions through safety slipping clutch. Powerful battery motor 21.6 V, with large power reserve, 500 W output. Right and left-hand rotation. Stepless electronic safety switch for fast and creep speed, with immediate stop. Machine status check with overload protection of the drive unit against too high currents, with overheating protection by motor temperature monitoring (NTC), with electronic battery charging status check with charging level indication by a 2-coloured green/red LED.

## Battery or mains operation


Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-Ion 21.6V, 4.4 Ah battery, for approx. 79 pipe bends, 5.0Ah battery, for approx. 90 pipe bends, 9.0 Ah for approx. 160 pipe bends of the stainless steel Ø 22 mm press fitting systems with one battery charge\*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100–240V, 90W. Rapid charger 100–240V, 290W, for shorter charging times, as accessory. Voltage supply 220–240V/21.6V, 40A output, for mains operation instead of Li-Ion battery 21.6 V, as accessory.



German Quality Product



Info

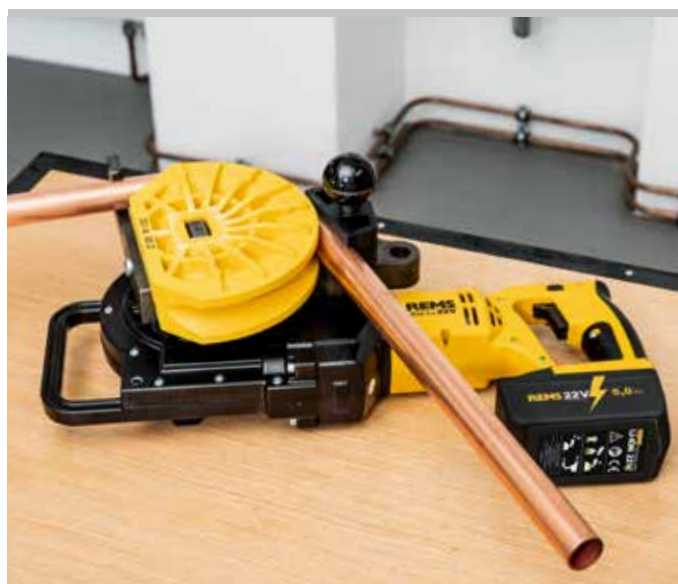



## Bending lubricant

REMS bending spray ensures a permanent lubricating film for reducing energy expenditure and uniform bending. High-pressure-proof, acid-free, CFC-free, so ozone-harmless.

## Supply format

**REMS Curvo 22V Set.** Cordless tube bender Ø 10–40 mm, Ø ¼–1 ½", to 180°. Hard, semi-hard, soft copper pipes, also thin-walled, Ø 10–28 mm, Ø ¾–1 ½", soft coated copper pipes, also thin-walled, Ø 10–18 mm, thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735-1 Ø ¾–1 ½", pipes of the press fitting systems of stainless steel Ø 12–28 mm, carbon steel, also coated, Ø 12–28 mm, soft precision steel pipes Ø 10–28 mm, steel pipes EN 10255 Ø ¼–¾", electrical installation pipes EN 50086 Ø 16–25 mm, composite tubes Ø 14–40 mm, etc. Drive machine with D-shaped handle, maintenance-free gear with safely slipping clutch, powerful battery motor 21.6 V, stepless, electronic safety switch with immediate stop, right and left-hand rotation. Machine status check with overload protection, temperature monitoring, battery charging status check. Li-Ion 21.6 V, 5.0 Ah battery, 100–240 V, 50–60 Hz, 90 W rapid charger. Insert bolt. Bending and back formers. In sturdy steel case.

Description	Art.-No.
<b>Set 15 + 18 + 22</b>	580051
<b>Set 15 + 18 + 22 + 28<sup>1)</sup></b>	580052
<b>Set 15 + 18 + 22 + 28<sup>2)</sup></b>	580053
<b>Set 15 + 18 + 22 + 28<sup>3)</sup></b>	580054
<b>Set 12 + 15 + 18 + 22</b>	580055
<b>Set 12 + 15 + 18 + 22 + 28<sup>1)</sup></b>	580056
<b>Set 12 + 15 + 18 + 22 + 28<sup>2)</sup></b>	580057
<b>Set 15 + 22 + 28<sup>1)</sup></b>	580058
<b>Set 15 + 22 + 28<sup>2)</sup></b>	580059
<b>Set 17 + 20 + 24</b>	580060
<b>Set 12 + 14 + 16 + 18 + 22</b>	580061
<b>Set 12 + 14 + 16 + 18 + 22 + 28<sup>1)</sup></b>	580062
<b>Set 12 + 14 + 16 + 18 + 22 + 28<sup>2)</sup></b>	580063
<b>Set 14 + 16 + 18 + 22 + 28<sup>1)</sup></b>	580064
<b>Set 14 + 16 + 18 + 22 + 28<sup>2)</sup></b>	580065
<b>Set ¾ + ½ + ¾ + ¾ + ¾"</b>	580066
<b>Set 16 + 20 + 26 + 32</b>	580067
<b>Set 16 + 20 + 25 + 32</b>	580068
<b>Set 20 + 25 + 32</b>	580069
<b>Basic-Pack (without bending and back formers)</b>	580014

Other voltages on request.

REMS Curvo 22V Set delivered with the smaller radius bending and back former (except Art.-No. 580069), see page 143.

<sup>1)</sup> Bending former and back former 28, R102, Art. No. 581070, for hard, semi-hard copper pipes, also thin-walled. See page 143.

<sup>2)</sup> Bending former and back former 28, ¾" (DN 20), R102, Art. No. 581260, for hard copper pipes Ø 28 mm, Ø 1 ½", pipes of the press fitting systems of stainless steel/carbon steel Ø 28 mm. See page 143.

<sup>3)</sup> Bending former and back former 28, ¾" (DN 20), R114, Art. No. 581310, for hard, semi-hard copper pipes Ø 28 mm, pipes of the press fitting systems of stainless steel/carbon steel Ø 28 mm, steel pipes ¾". According to DVGW work sheet GW 392 for hard and semi-hard copper pipes Ø 28 mm minimum bending radius 114 mm necessary. Wall thickness ≥ 0.9 mm. See page 143.

## Accessories


Description	Art.-No.
<b>Bending formers and back formers</b> see page 143.	
<b>REMS Curvo 22V drive unit, without battery</b>	580004
<b>Battery Li-Ion 21.6 V, 4.4 Ah</b>	571574
<b>Battery Li-Ion 21.6 V, 5.0 Ah</b>	571581
<b>Battery Li-Ion 21.6 V, 9.0 Ah</b>	571583
<b>Rapid charger 100–240 V, 50–60 Hz, 90 W</b>	571585
<b>Rapid charger 100–240 V, 50–60 Hz, 290 W</b>	571587
<b>Voltage supply 220–240 V/21.6 V, 50–60 Hz, 40 A, for mains operation instead of battery Li-Ion 21.6 V</b>	571578
<b>Insert bolt</b>	582036
<b>REMS bending spray, 400 ml</b>	140120
<b>Steel case with inlay</b>	566030
<b>Machine support 3B, height adjustable, on tripod</b>	586100
<b>Machine support WB, height adjustable, for mounting on work bench</b>	586150
<b>REMS Lumen 2800 22V, cordless LED flood light, see page 111</b>	



Basic-Pack



3B



WB

Universal, robust hand tool for cold bending up to 180°. Can be used anywhere. For trade and industry. For the building site and the workshop.

Hard, half-hard, soft copper tubes, also thin-wall	Ø 10 – 22 mm Ø 3/8 – 7/8"
Coated soft copper tubes, also thin-wall	Ø 10 – 18 mm
Pipes of press fitting systems made of stainless steel, carbon steel (coated)	Ø 12 – 18 mm
Carbon steel	Ø 12 – 22 mm
Soft precision steel tubes	Ø 10 – 20 mm
Electric conduit EN 50086	Ø 16 – 20 mm
Multi-layer composite tubes	Ø 14 – 32 mm

**REMS Sinus – wrinkle-free bending.**  
**Universal for many tubes. Easy bending through long lever arms. Selectable lever positioning ensures optimum bending position and power transmission. Only one type of bending and back formers for REMS Sinus and REMS Curvo.**

### Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Specially suited for tubes of pressfitting systems, for hard and half-hard copper tubes and for thin-walled copper heating tubes according to EN 1057.

### System advantage

Only one type of bending and back formers for REMS Curvo 22V, REMS Curvo, REMS Curvo 50 and REMS Sinus. Therefore simple, inexpensive stocking. No confusion possible.

### Cost advantage

Bender cost recovered after a small number of bends. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

### Design

Compact, handy unit of bender drive and bending tools. Can be used anywhere, in parallel vice or free hand as double-hand-bender. Easy bending through long lever arms. Selectable lever positioning ensures optimum bending position and power transmission. Robust design, drive unit in hardened steel for high stress. Simple and rapid changing of bending and back formers. Crossover, swan-neck and U-bends possible.

### Bending formers and back formers

For different pipe sizes, materials and bending radii, see page 143.

### Bending lubricant

REMS bending spray ensures a permanent lubricating film for reducing energy expenditure and for uniform bending. High-pressure-proof, acid-free. CFC-free, so ozone-harmless.

### Supply format



**REMS Sinus Set.** Hand tube bender Ø 10–32 mm, Ø 3/8–7/8", up to 180°. Hard, half-hard, soft copper tubes, also thin-wall Ø 10–22 mm, Ø 3/8–7/8", coated soft copper tubes, also thin-wall Ø 10–18 mm, pipes of the press fitting systems made of stainless steel, carbon steel (coated) Ø 12–18 mm, soft precision steel tubes Ø 10–22 mm, soft precision steel tubes, Ø 10–20 mm, electric conduit EN 50086, Ø 16–20 mm, multi-layer composite tubes Ø 14–32 mm and others. Drive unit, insert bolt. Bending formers and back formers. REMS bending spray. In sturdy steel case.

Description	Art.-No.
<b>Set 15 + 18 + 22</b>	154001
<b>Set 14 + 16 + 18</b>	154002
<b>Set 12 + 15 + 18 + 22</b>	154003
<b>Set 10 + 12 + 14 + 16 + 18 + 22</b>	154004
<b>Basic-Pack</b> (without bending and back formers and bending spray)	154010

REMS Sinus Set is delivered with bending formers and back formers of the smaller radius, see page 143.

### Accessories

Description	Art.-No.
<b>Bending and back formers</b> see page 143.	
<b>Insert bolt</b>	582036
<b>REMS Curvo drive unit</b>	580000
<b>REMS Sinus drive unit</b>	154000
<b>REMS bending spray</b> , 400 ml	140120
<b>Steel case with inlay</b>	154160

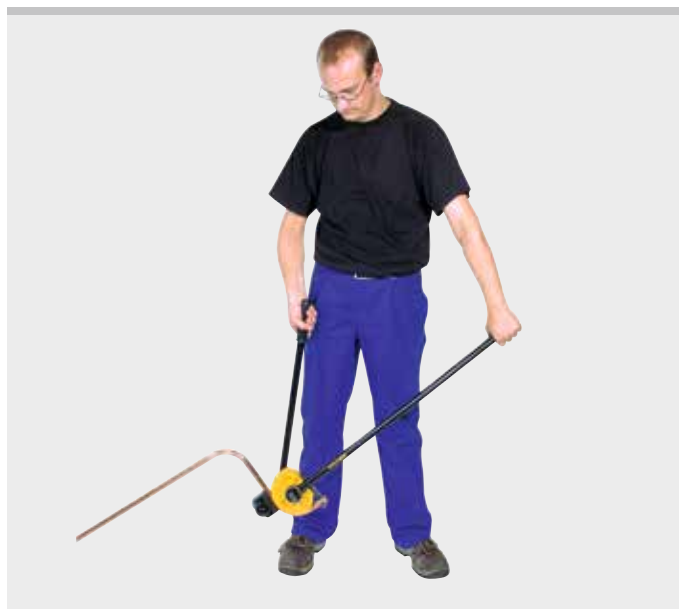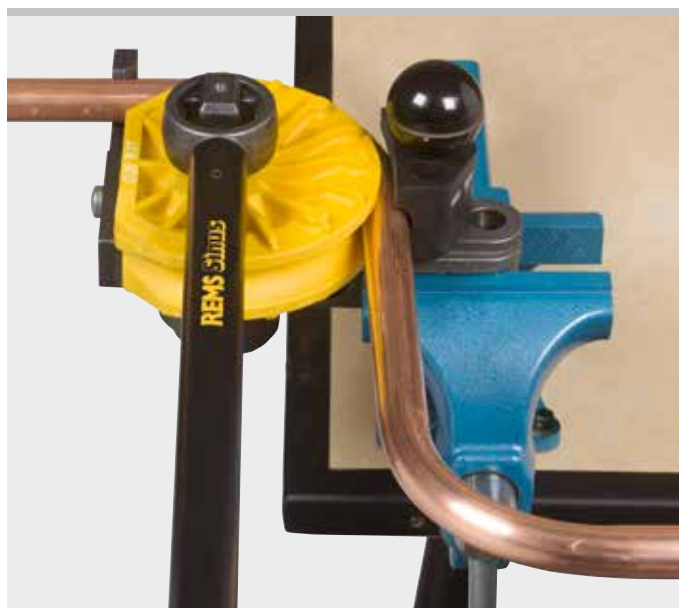

German Quality Product



Info



