

REMS Power-Press SE

Electric radial press 32 kN

Universal, handy electric tool for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints \varnothing 10 – 108 (110) mm
 \varnothing $\frac{3}{8}$ – 4"

Complete range of REMS pressing tongs/
pressing rings for all common pressfitting systems,
see page 198 – 236.

REMS Power-Press SE – universal up to \varnothing 110 mm.
Secure crimping in seconds.
Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing chains.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. The pressing tongs remain in a closed position until machine is switched and runs into reverse. The perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-mechanical drive with proven universal motor, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle. Overload protection. Safety tip switch.



Two connections for
REMS Eco-Press manual
radial press and REMS
32 kN radial presses.

German Quality Product



Info



Supply format

REMS Power-Press SE Basic-Pack. Electric radial press 32 kN for producing pressing joints \varnothing 10 – 108 (110) mm, \varnothing $\frac{3}{8}$ – 4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-mechanical drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle, overload protection, safety tip switch. In sturdy steel case.

	Art.-No.
	572111

Other voltages on request.

Accessories

Description	Art.-No.
REMS Power-Press SE Drive Unit	572101
REMS pressing tongs/pressing rings see page 198 – 236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
Steel case with insert	570280



REMS Power-Press

Electro-hydraulic radial press 32 kN
with switch-off signal

Universal, handy electric tool with switch-off signal for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints \varnothing 10 – 108 (110) mm
 \varnothing $\frac{3}{8}$ – 4"

Complete range of REMS pressing tongs/
pressing rings for all common pressfitting systems,
see page 198 – 236.

REMS Power-Press – universal up to \varnothing 110 mm.

Secure crimping in seconds.

Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing connections marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Ideal weight distribution for single handed operation. Ergonomically designed housing with recessed grip. Swivelling pressing tongs/adapter tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. Acoustic signal after successful completion of pressing operation. The pressing tongs remain in a closed position until reset button is pushed and releases. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with proven universal motor 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.



German Quality Product



Supply format

REMS Power-Press Basic-Pack. Electro-hydraulic radial press 32 kN with switch-off signal for producing pressing joints \varnothing 10 – 108 (110) mm, \varnothing $\frac{3}{8}$ – 4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing chains. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Version	Art.-No.
In sturdy steel case.	577011
In L-Boxx system case.	577012

Other voltages on request.

Accessories

Description	Art.-No.
REMS Power-Press Drive Unit	577001
REMS pressing tongs/pressing rings see page 198 – 236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
Steel case with insert	570280
L-Boxx system case with inserts	571283



REMS Power-Press ACC

Electro-hydraulic radial press 32 kN with automatic retraction

Universal, handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints \varnothing 10 – 108 (110) mm
 \varnothing $\frac{3}{8}$ – 4"

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 198 – 236.

REMS Power-Press ACC – universal up to \varnothing 110 mm. With automatic circuit control. Secure crimping in seconds. Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Ideal weight distribution for single handed operation. Ergonomically designed housing with recessed grip. Swivelling pressing tongs/adapter tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with proven universal motor 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.



German Quality Product



Info

Supply format

REMS Power-Press ACC Basic-Pack. Electro-hydraulic radial press 32 kN with automatic retraction for producing pressing joints \varnothing 10 – 108 (110) mm, \varnothing $\frac{3}{8}$ – 4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Version	Art.-No.
In sturdy steel case.	577010
In L-Boxx system case.	577013

Other voltages on request.



Accessories

Description	Art.-No.
REMS Power-Press ACC Drive Unit	577000
REMS pressing tongs/pressing rings see page 198 – 236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
Steel case with insert	570280
L-Boxx system case with inserts	571283



REMS Power-Press XL ACC

Electro-hydraulic radial press XL 32 kN
with automatic retraction

Universal, powerful power tool with automatic circuit control for making press joints of all common press fitting systems.

Pipe pressing joints \varnothing 10 – 108 (110) mm
 \varnothing 3/8 – 4"

Complete range of REMS pressing tongs/pressing rings/
pressing rings XL for all common pressfitting systems,
see page 198 – 236.

REMS Power-Press XL ACC – universal up to \varnothing 110 mm.
Pressing of \varnothing 10 – 108 mm in just one action.
Ultra-fast, e.g. Geberit Mapress stainless steel \varnothing 108 mm
in only 15 seconds. With automatic circuit control.
Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings/pressing rings XL for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/XL pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings/pressing rings XL are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs are required, as an accessory, for driving the REMS (PR) pressing rings.

Design


Compact, robust, job site-proven. Small in size, slender design, drive unit only 5.5 kg. Long working stroke for pressings in a single action, ideal for large dimensions. Ultra-fast, e.g. Geberit Mapress stainless steel \varnothing 108 mm in only 15 seconds. Ergonomically designed housing with soft grip and recessed handle. Swivelling pressing tongs/adapter tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings. Adjustable hand guard.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with proven universal motor 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.



German Quality Product



Info

Supply format

REMS Power-Press XL ACC Basic-Pack. Electro-hydraulic radial press 32 kN with automatic retraction for producing pressing joints \varnothing 10 – 108 (110) mm, \varnothing 3/8 – 4". For driving REMS pressing tongs/pressing rings/pressing rings XL and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Version	Art.-No.
In transport case XL.	579010
In XL-Boxx system case.	579012

Other voltages on request.



Accessories

Description	Art.-No.
REMS Power-Press XL ACC drive Unit	579000
Adapter tongs Z6 XL for driving REMS pressing rings 64.0 – 108.0 XL (PR-3S), 2 1/2 – 4" XL (PR-3S) with REMS Power-Press XL ACC	579120
Adapter tongs for other REMS pressing rings see page 236.	
REMS pressing tongs/pressing rings/pressing rings XL see page 198 – 236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
Transport case XL with inlays and practical carrying handles	579240
XL-Boxx system case with inserts	579601





REMS Akku-Press 14 V

Cordless radial press 32 kN with switch-off signal

Universal, handy electric tool with switch-off signal for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints \varnothing 10 – 108 (110) mm / \varnothing $\frac{3}{8}$ – 4

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 198 – 236.

REMS Akku-Press 14 V – universal up to \varnothing 110 mm.

Secure crimping in seconds.

Automatic locking of pressing tongs.

Li-Ion 14.4 V, 5.0 Ah battery for approx. 450 pressings

Viega Profipress DN 15 with one battery charge*.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, handy, light. Drive unit with battery only 4.3 kg. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. Acoustic signal after successful completion of pressing operation. The pressing tongs remain in a closed position until reset button is pushed and releases. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 5.0 Ah capacity, for long service life. Light and powerful. Li-Ion 14.4 V, 5.0 Ah battery for approx. 450 pressings Viega Profipress DN 15 with one battery charge*. Operating temperature range -10 to $+60$ °C. No memory effect for maximum battery power. Rapid charger 220–240 V or 110 V, 10.8–18 V, 65 W, for short charging times. Voltage supply 220–240 V/14.4 V, 33 A output, for mains operation instead of Li-Ion battery 14.4 V, as accessory.



German Quality Product



Info



Supply format

REMS Akku-Press 14 V Basic-Pack. Cordless radial press 32 kN with switch-off signal for producing pipe pressing joints \varnothing 10 – 108 (110) mm, \varnothing $\frac{3}{8}$ – 4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 14.4 V, 5.0 Ah, rapid charger 220–240 V or 110 V, 50–60 Hz, 10.8–18 V, 65 W.

Version	Art.-No.
In sturdy steel case.	571013
In L-Boxx system case.	571020

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs/pressing rings see page 198–236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
REMS Akku-Press 14 V drive unit, without battery	571003
Battery Li-Ion 14.4 V, 5.0 Ah	571555
Rapid charger 220–240 V, 50–60 Hz, 10.8–18 V, 65 W	571560
Voltage supply 220–240 V/14.4 V, 50–60 Hz, 33 A, for mains operation instead of battery Li-Ion 14.4 V.	571565
Steel case with inlay	571290
L-Boxx system case with inserts	571283



REMS Akku-Press 14 V ACC

Cordless radial press 32 kN with automatic circuit control

Universal, handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints \varnothing 10–108 (110) mm / \varnothing $\frac{3}{8}$ –4

Complete range of REMS pressing tongs/
pressing rings for all common pressfitting systems,
see page 198–236.

REMS Akku-Press 14 V ACC – universal up to \varnothing 110 mm. With automatic circuit control. Secure crimping in seconds. Automatic locking of pressing tongs. Li-Ion 14.4 V, 5.0 Ah battery for approx. 450 pressings Viega Profipress DN 15 with one battery charge*.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198–236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, handy, light. Drive unit with battery only 4.3 kg. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 5.0 Ah capacity, for long service life. Light and powerful. Li-Ion 14.4 V, 5.0 Ah battery for approx. 450 pressings Viega Profipress DN 15 with one battery charge*. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger 220–240 V or 110 V, 10.8–18 V, 65 W, for short charging times. Voltage supply 220–240 V/14.4 V, 33 A output, for mains operation instead of Li-Ion battery 14.4 V, as accessory.



German Quality Product



Info



Supply format

REMS Akku-Press 14 V ACC Basic-Pack. Cordless radial press 32 kN with automatic circuit control for producing pipe pressing joints \varnothing 10–108 (110) mm, \varnothing $\frac{3}{8}$ –4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 14.4 V, 5.0 Ah, rapid charger 220–240V or 110 V, 50–60 Hz, 10.8–18V, 65W.

Version	Art.-No.
In sturdy steel case.	571014
In L-Boxx system case.	571019

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs/pressing rings see page 198–236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
REMS Akku-Press 14 V ACC drive unit, without battery	571004
Battery Li-Ion 14.4 V, 5.0 Ah	571555
Rapid charger 220–240V, 50–60 Hz, 10.8–18V, 65W	571560
Voltage supply 220–240V/14.4V, 50–60 Hz, 33 A, for mains operation instead of battery Li-Ion 14.4 V.	571565
Steel case with inlay	571290
L-Boxx system case with inserts	571283



REMS Akku-Press 22V ACC

Cordless radial press 32 kN with automatic circuit control and pressure monitoring

Universal, handy electric tool with automatic circuit control and pressure monitoring for producing pipe pressing joints for all common pressfitting systems. Li-Ion 22V Technology. For battery and corded operation.

Pipe pressing joints \varnothing 10 – 108 (110) mm
 \varnothing $\frac{3}{8}$ – 4"

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 198 – 236.

REMS Akku-Press ACC – universal up to \varnothing 110 mm. With automatic circuit control and pressure monitoring. Anti-vibration system. Secure crimping in seconds. Automatic locking of pressing tongs. Li-Ion 21.6V, 2.5 Ah battery for approx. 200 pressings Viega Profipress DN 15 with one battery charge*.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, handy, super light. Drive unit with battery only 3.2 kg. Drive unit with pressing tongs V 15 only 35.5 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing and soft grips. LED work light for illuminating the work place. Machine status check. Swivelling pressing tongs seat, rotation angle $> 360^\circ$. Secure seating of pressing tongs/adapter tongs by automatic locking. Also for other suitable makes of pressing tongs/pressing rings.

Pressure monitoring

Monitoring of the pressure during the pressing process. Pressure evaluation with coloured LED.

Anti-vibration system

Special drive technology with weight balancing and soft grips for low-vibration, fatigue-free pressing.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation


Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-Ion 21.6V, 2.5 Ah batteries for approx. 200 pressings, 4.4 Ah for approx. 350 pressings, 5.0 Ah for approx. 400 pressings, 9.0 Ah for approx. 720 pressings Viega Profipress DN 15 with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 – 240V, 90W. Rapid charger 100 – 240V, 290W, for shorter charging times, as accessory. Voltage supply 220 – 240V/21.6V, 15A output, for mains operation instead of Li-Ion battery 21.6V, as accessory.



German Quality Product



Info

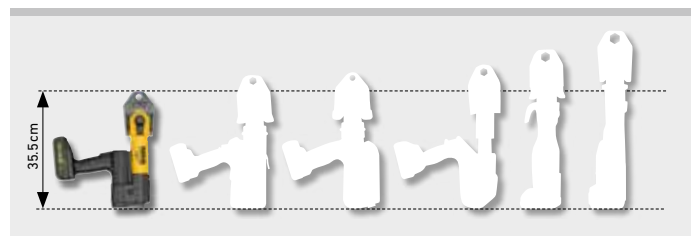

The little one amongst the big. Only 3.2 kg.



Supply format

REMS Akku-Press 22 V ACC Basic-Pack. Cordless radial press 32 kN with automatic circuit control and pressure monitoring for making press joints Ø 10–108 (110) mm, Ø 3/8–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Anti-vibration system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 100–240 V, 50–60 Hz, 90 W.

Version	Art.-No.
In sturdy steel case.	576010
In L-Boxx system case.	576011

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs/pressing rings see page 198–236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
REMS Akku-Press 22 V ACC drive unit, without battery	576000
Battery Li-Ion 21.6 V, 2.5 Ah	571571
Battery Li-Ion 21.6 V, 4.4 Ah	571574
Battery Li-Ion 21.6 V, 5.0 Ah	571581
Battery Li-Ion 21.6 V, 9.0 Ah	571583
Rapid charger 100–240 V, 50–60 Hz, 90 W	571585
Rapid charger 100–240 V, 50–60 Hz, 290 W	571587
Voltage supply 220–240 V/21.6 V, 50–60 Hz, 15 A, for mains operation instead of battery Li-Ion 21.6 V.	571567
Steel case with inlay	571290
L-Boxx system case with inserts	571283
REMS Lumen 2800 22 V, cordless LED flood light, see page 111	



REMS Akku-Press 22V ACC Connected

Cordless radial press 32 kN with Connected functionality via Wi-Fi radio standard and OLED display

Universal, handy electric tool with Connected functionality via Wi-Fi radio standard and OLED display for producing pipe pressing joints for all common pressfitting systems. Li-Ion 22V Technology. For battery and corded operation.

Pipe pressing joints Ø 10 – 108 (110) mm
Ø 3/8 – 4"

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 198 – 236.

REMS Akku-Press 22V ACC Connected – universal up to Ø 110 mm. With Connected functionality via Wi-Fi radio standard and OLED display. Selectable ACC drive mode. Pressure monitoring. Anti-vibration system. Automatic locking of pressing tongs. Electrically monitored closing position of the tong retaining bolt. Secure crimping in seconds. Voice recordings with voice recognition. Creating reports with texts and pictures. Geolocalisation of the pressing sites. Li-Ion 21.6V, 2.5 Ah battery for approx. 200 pressings. Viega Profipress DN 15 with one battery charge*.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198 – 236). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 236.

Design

Compact, handy, super light. Drive unit with battery only 3.3 kg. Drive unit with pressing tongs V 15 only 36.3 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing with strong carrying ring for a shoulder strap. Soft-grip surfaces. Two rows of LED work lights for illuminating the workplace as required, adjustable brightness in 4 stages and lighting time. Machine status check with charging state indication by 2-coloured green/red LED. Swivelling pressing tongs seat, rotation angle > 360°. Secure seating of pressing tongs/adapter tongs by automatic locking. Electrically monitored closing position of the tong retaining bolt. Also for other suitable makes of pressing tongs/pressing rings.

Connected functionality

REMS Akku-Press 22V ACC Connected offers various additional functionalities such as, for example: Recording of measuring/pressing data, creation of reports with your own company logo, display of error messages, configuration of the product (language, date, time, time zone, pressure unit, LED lighting time and LED brightness, standby time, ACC drive mode, information signal tones, etc.), set-up of usage bars (immediate bar or feedback interval as anti-theft, time and date ranges for barring times, limitation of the number of performable pressings), geolocalisation of the pressing sites, conversion of voice recordings into editable text, upload and save images of pressings, display of notices (annual inspection and periodic testing, new firmware version, battery state, etc.), download and installation of new firmware version.

Pressure monitoring


Monitoring and display of pressure and maximum pressure during the pressing process. Pressure analysis after the pressing process with result display in the OLED display and with coloured LEDs. Display of the pressure-time diagram of the performed pressing directly in the OLED display.

Voice recordings with voice recognition

A voice recording can be made and stored for every pressing with the microphone integrated into the drive unit. These can be converted into editable text and transferred to reports in the Service Portal.

Wi-Fi connection to the Cloud

REMS Akku-Press 22V ACC Connected sends collected data (measuring and pressing data, error messages, configuration of the product, voice recordings, etc.) to the Cloud after registration and with an existing Internet connection. The data are processed and stored there. The user can access these data, upload and store pictures of pressings, create reports with texts and pictures and change the drive unit settings through the REMS Service Portal. The changes are transferred back to the drive unit via an existing Internet connection.

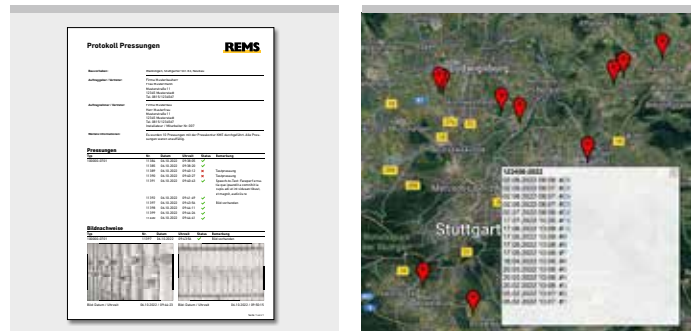

German Quality Product



REMS Akku-Press 22 V ACC Connected

Cordless radial press 32 kN with Connected functionality via Wi-Fi radio standard and OLED display

Selectable ACC drive mode

When ACC drive mode is switched on, the drive unit ends the pressing process automatically, emits an acoustic signal (clicking) and automatically returns (automatic circuit control). When ACC mode is switched off, the drive unit stops just before reaching the required pressure to be able to monitor complete closing of the pressing tongs, pressing ring and pressing segments better at the end of the pressing process. The pressing process must be continued by pressing the safety switch again. The drive unit ends the pressing process automatically, emits an acoustic signal (clicking) and automatically returns (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. High-performance, electro-hydraulic drive with powerful, brushless, maintenance free 21.6 V, 400 W battery motor, robust planetary gear, eccentric piston pump and compact high-performance hydraulic system. Safety switch.

Anti-vibration system

Special drive technology with weight balancing and soft grips for low-vibration, fatigue-free pressing.

Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 2.5, 4.4, 5.0 or 9.0Ah capacity, for long service life. Light and powerful. Li-Ion 21.6V, 2.5 Ah batteries for approx. 210 pressings, 4.4 Ah for approx. 370 pressings, 5.0 Ah for approx. 420 pressings, 9.0 Ah for approx. 750 pressings Viega Profipress DN 15 with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100–240V, 90W. Rapid charger 100–240V, 290W, for shorter charging times, as accessory. Voltage supply 220–240V/21.6V, 15A output, for mains operation instead of Li-Ion battery 21.6 V, as accessory.



The little one amongst the big. Only 3.3 kg.

Supply format

REMS Akku-Press 22 V ACC Connected Basic-Pack. Cordless radial press 32 kN with Connected functionality via Wi-Fi radio standard and OLED display, for making press joints \varnothing 10–108 (110) mm, \varnothing $\frac{3}{8}$ –4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electrically monitored closing position of the tong retaining bolt. Electro-hydraulic drive with powerful, brushless, maintenance free 21.6 V, 400W battery motor, robust planetary gear, eccentric piston pump and compact high-performance hydraulic system. Anti-vibration system. Safety tip switch. LED work lights. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger 100–240V, 50–60Hz, 90W.

Version	Art.-No.
In sturdy steel case.	576014
In L-Boxx system case.	576015

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs/pressing rings see page 198–236.	
REMS cropping tongs for threaded rods see page 239.	
REMS cable shear for electric cable see page 239.	
REMS Akku-Press 22 V ACC Connected drive unit , without battery	576003
Battery Li-Ion 21.6 V, 2.5 Ah	571571
Battery Li-Ion 21.6 V, 4.4 Ah	571574
Battery Li-Ion 21.6 V, 5.0 Ah	571581
Battery Li-Ion 21.6 V, 9.0 Ah	571583
Rapid charger 100–240V, 50–60 Hz, 90W	571585
Rapid charger 100–240V, 50–60 Hz, 290W	571587
Voltage supply 220–240V/21.6V, 50–60 Hz, 15A , for mains operation instead of battery Li-Ion 21.6 V.	571567
Steel case with inlay	571290
L-Boxx system case with inserts	571283
REMS Lumen 2800 22V , cordless LED flood light, see page 111	



* Ambient temperature approx. 20°C. Wi-Fi disabled. LED work lights off.

REMS Akku-Press XL 45 kN 22 V ACC

Cordless radial press XL 45 kN
with automatic circuit control

Universal, powerful electric tool with automatic circuit control for producing XL pipe pressing joints for all common pressfitting systems. Thrust force 45 kN. Li-Ion 22V Technology. For battery and corded operation.

Pipe pressing joints XL	Ø 64 – 108 mm
	Ø 2½ – 4"

Complete range of REMS pressing rings XL for all common pressfitting systems, see page 198 – 236.

REMS Akku-Press XL 45 kN 22 V ACC – the powerful one with 45 kN thrust force. Pressing of Ø 64 – 108 mm in a single action. Anti-vibration system. Super fast, e.g. Geberit Mapress stainless steel Ø 108 mm in just 15 s. With automatic circuit control. Secure seating of adapter tongs by automatic locking.

Li-Ion 21.6 V, 5.0 Ah battery, for approx. 150 pressings Geberit Mapress stainless steel Ø 108.0 mm with one battery charge*.

Pressing rings XL for all common systems

Full range of REMS pressing rings XL for driving by REMS Akku-Press XL 45 kN 22 V ACC (page 198 – 236). Highly durable pressing rings XL made of tenacious, specially hardened special steel. Pressing contours of REMS pressing rings XL are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing.

Adapter tongs Z7 XL 45 kN

For driving REMS pressing rings XL by REMS Akku-Press XL 45 kN 22 V ACC adapter tongs Z7 XL 45 kN are required.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit with battery only 6.5 kg. Long working stroke for pressings in a single action. Super fast, e.g. Geberit Mapress stainless steel Ø 108 mm in just 15 s. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing and soft grips. LED work light for illuminating the work place. Machine status check. Swivelling pressing ring seat, rotation angle > 360°. Secure seating of adapter tongs by automatic locking.

Anti-vibration system

Special drive technology with weight balancing and soft grips for low-vibration, fatigue-free pressing.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 45 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric dual-piston pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion 22 V Technology. Highly resistant Li-Ion 21.6 V battery with 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-Ion 21.6 V, 4.4 Ah batteries for approx. 130 pressings, 5.0 Ah batteries for approx. 150 pressings, 9.0 Ah for approx. 270 pressings Geberit Mapress stainless steel Ø 108.0 mm with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 – 240 V, 90 W. Rapid charger 100 – 240 V, 290 W, for shorter charging times, as accessory. Voltage supply 220 – 240 V/21.6 V, 40 A output, for mains operation instead of Li-Ion battery 21.6 V, as accessory.



German Quality Product



Supply format

REMS Akku-Press XL 45 kN 22 V ACC Basic-Pack Z7. Cordless radial press 45 kN with automatic circuit control for making press joints XL Ø 64 – 108 mm, Ø 2½ – 4". For driving REMS pressing rings XL. Swivelling pressing ring seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric dual-piston pump and compact high power hydraulic system. Anti-vibration system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 5.0 Ah, rapid charger 100 – 240 V, 50 – 60 Hz, 90 W. Adapter tongs Z7 XL 45 kN. In XL-Boxx system case.

	Art.-No.
	579014

Other voltages on request.



Accessories

Description	Art.-No.
REMS Akku-Press XL 45 kN 22 V ACC drive unit, without battery	579001
Adapter tongs Z7 XL 45 kN for driving REMS pressing rings 64.0 – 108.0 XL (PR-3S), 2½ – 4" XL (PR-3S), 2½ – 4" XL (PR-3B) with REMS Akku-Press XL 45 kN 22 V ACC	579123

REMS pressing rings XL see page 198 – 236

Battery Li-Ion 21.6 V, 4.4 Ah	571574
Battery Li-Ion 21.6 V, 5.0 Ah	571581
Battery Li-Ion 21.6 V, 9.0 Ah	571583
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W	571585
Rapid charger 100 – 240 V, 50 – 60 Hz, 290 W	571587
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 40 A, for mains operation instead of battery Li-Ion 21.6 V	571578
XL-Boxx system case with inserts	579601

REMS Lumen 2800 22 V, cordless LED flood light, see page 111



for all common pressfitting systems

**Select REMS pressing tongs/
REMS pressing rings yourself!**

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the pressing tongs/pressing rings which are highlighted in yellow in the table.

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force or, if the system requires, by REMS Akku-Press XL 45 kN 22V ACC with 45 kN thrust force, see the table below. Adapter tongs (page 236) required for driving REMS (PR) pressing rings. All pressing tongs marked with * have an optional connection for manual drive through the radial press REMS Eco-Press.

Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

REMS pressing tongs (PZ-2B)

REMS pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Most sold standard version. REMS ACz, Fz, RFz, RFlz, VMPz pressing tongs with teeth prevent formation of burr on the pressfitting (Patent EP 2 027 971).

REMS pressing tongs (PZ-4G)

REMS pressing tongs (PZ-4G) with two pivoted, parallel aligned pressing segments for linear pressing of midsize dimensions.

REMS pressing tongs (PZ-S)

REMS pressing tongs (S) with one fixed and two pivoted pressing segments, for midsize dimensions. REMS VMPz pressing tongs with teeth prevent formation of burr on the pressfitting.

REMS pressing rings (PR-3S)

REMS pressing ring (PR-3S) with 3 pressing segments, 2 swivel guided, for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments. Adapter tongs required, see page 236.

REMS pressing rings (PR-3B)

REMS pressing rings (PR-3B) with 3 pressing segments for high quality, large dimension pressings Optimum pressing by radially controlled movement of the pressing segments. Adapter tongs required, see page 236. REMS VAUFz, VFz, VMPz, VUSFz pressing rings with teeth prevent formation of burr on the pressfitting.

REMS pressing ring (PR-2B)

REMS pressing ring (PR-2B) with 2 pressing jaws, for secure engagement of the pressing jaws in tight spaces, for midsize dimensions. Adapter tongs required for driving the REMS (PR-2B) pressing rings, see page 236.

REMS pressing ring S (PR-2B)

REMS pressing ring S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 236.

Traceability according to EN 1775:2007

REMS pressing tongs/pressing rings with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs or the suitable pressing ring have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.

Confirmation of suitability

See page 237.

Hold-Harmless and Indemnification Agreement

See page 238.



Two connections for REMS Eco-Press manual radial press and REMS 32 kN radial presses.



German Quality Product



REMS pressing tongs (PZ-2B)



REMS pressing tongs (PZ-4G)



REMS pressing tongs (PZ-S)



REMS pressing rings (PR-3S)



REMS pressing rings (PR-3B)




REMS pressing rings (PR-2B)



REMS pressing ring S (PR-2B), continuously swivellable

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

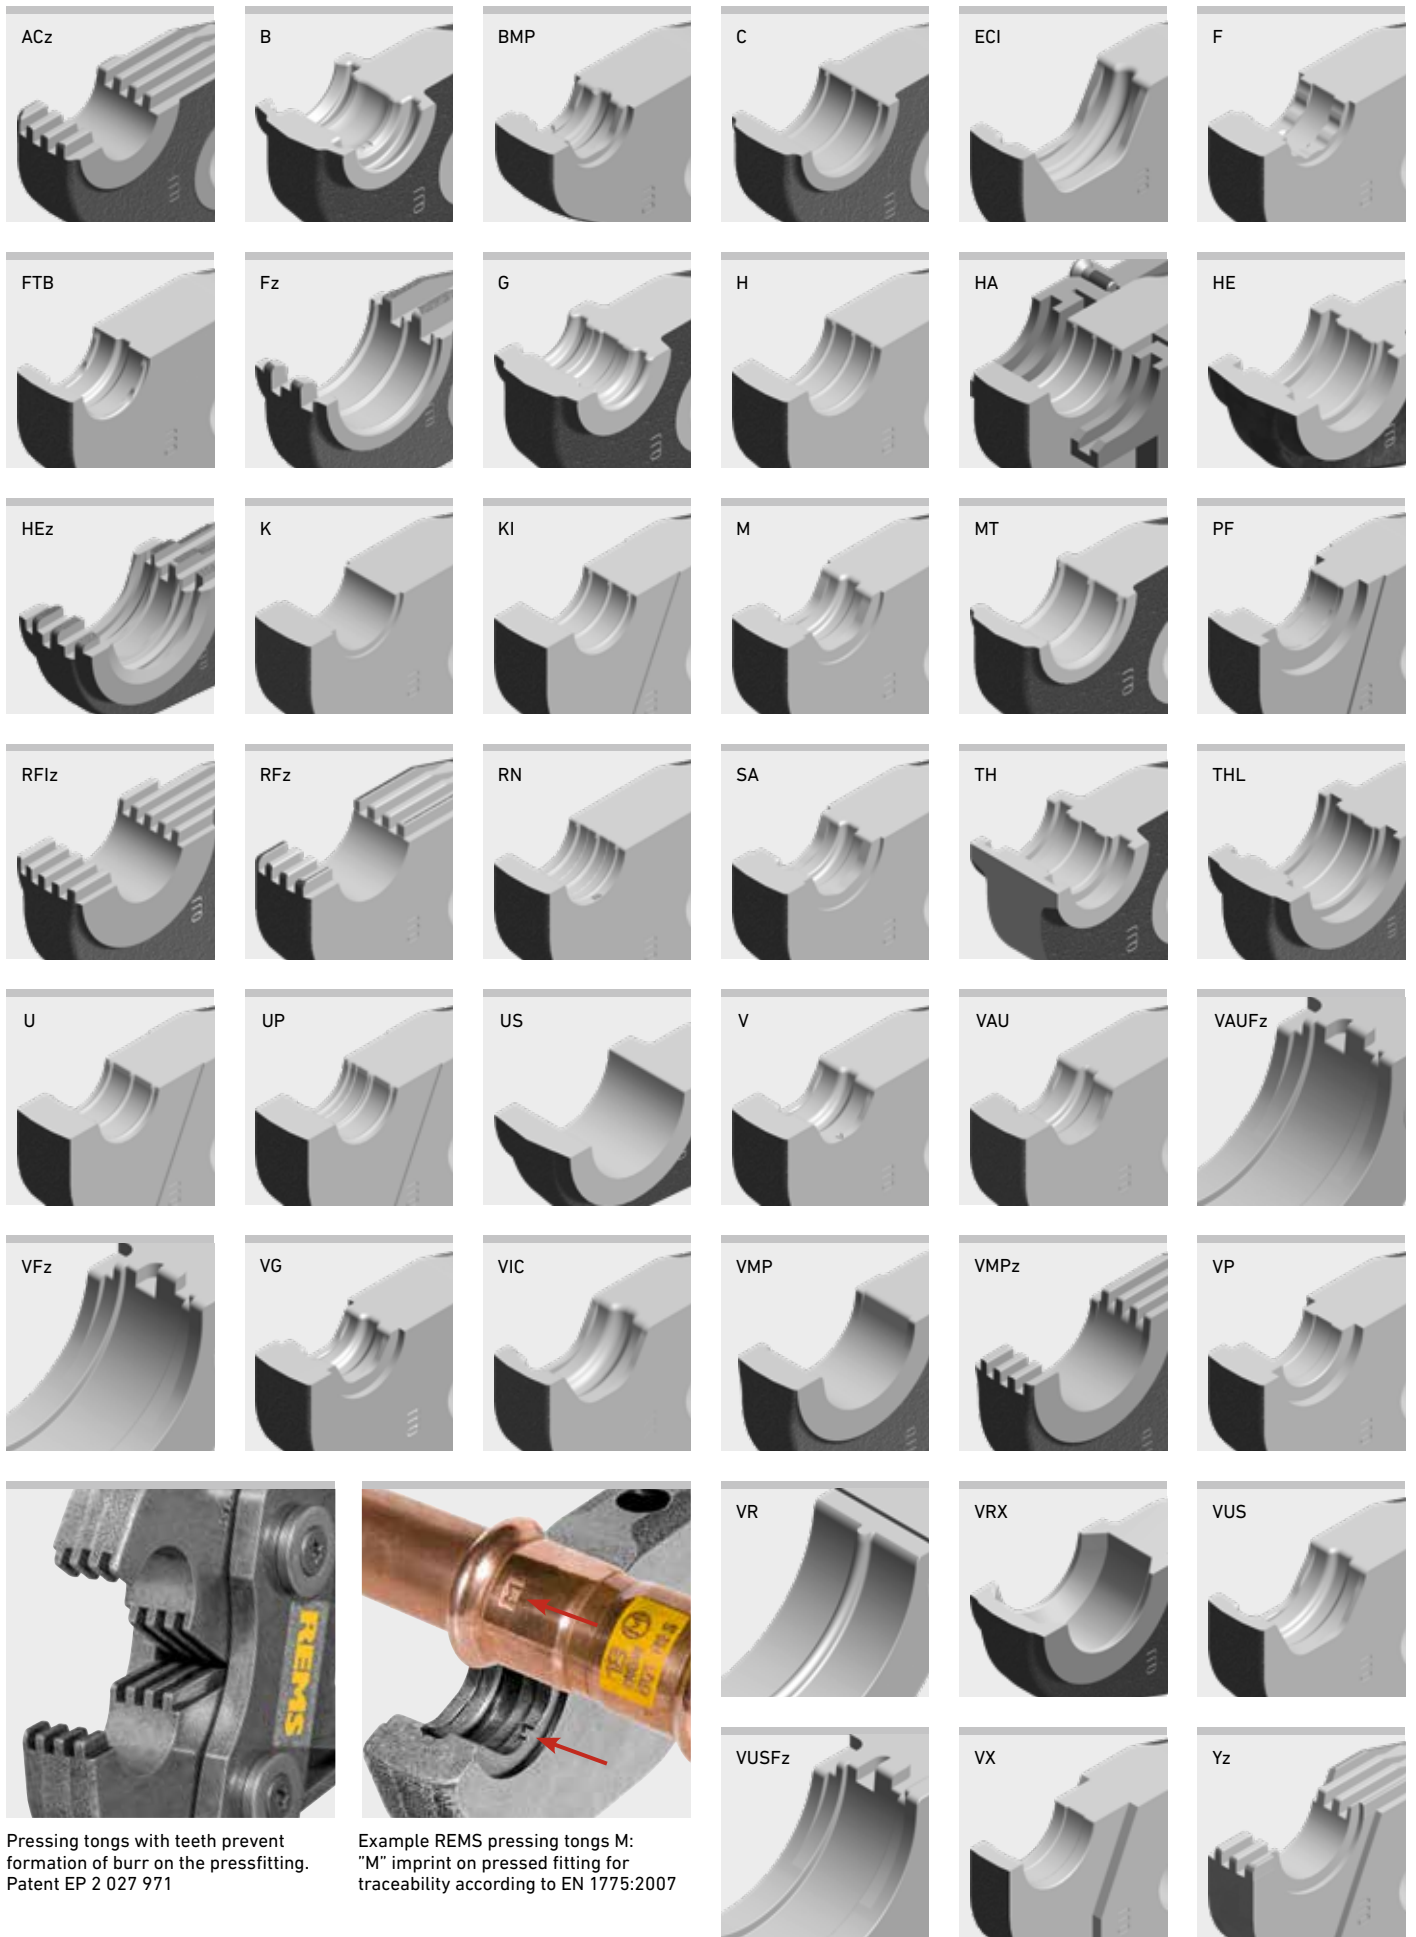

Pressing tongs with teeth prevent formation of burr on the pressfitting. Patent EP 2 027 971

Example REMS pressing tongs M: "M" imprint on pressed fitting for traceability according to EN 1775:2007

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
A				
AC-FIX PRESS (Global Piping Systems)	H 12*		570300	
	H 16*		570320	
	H 20*		570350	
	H 25*		570360	
	H 32		570380	
	RFz 12*		571320	
	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571335	
	RFz 32		571340	
	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	VX 16*		571635	
	VX 20*		571640	
	AC-FIX PRESS DUO (Global Piping Systems)	RFz 16*		571325
RFz 20*			571330	
RFz 25			571335	
RFz 32			571340	
TH 16*			570460	
TH 20*			570470	
TH 25*			570495	
TH 26*			570475	
TH 32			570480	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
U 16*			570765	
U 20*			570775	
U 25*			570780	
U 32			570785	
AC-FIX PRESS-MULTI (Global Piping Systems)	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 25*		570360	
	H 32		570380	
	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571335	
	RFz 32		571340	
	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	ACOME ACOPEX ALU	H 16*		570320
		H 20*		570350
		H 26*		570370
H 32			570380	
TH 16*			570460	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
U 16*			570765	
U 20*			570775	
U 32			570785	
ACOME MT		Acz 12*		572642
		Acz 16*		572644
	Acz 20*		572646	
	Acz 25		572648	
	AHLSELL A-press elförzinkad M	M 12		570100
M 15			570110	
M 18			570120	
M 22			570130	
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 12 S (PR-2B)		Z8	574736	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
AHLSELL A-press elförzinkad V	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 54		570175	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
AHLSELL A-press koppar M	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	AHLSELL A-press koppar V	V 12		570107
V 15			570115	
V 18			570125	
V 22			570135	
V 28			570145	
V 35			570155	
V 42			570165	
V 54			570175	
V 12 S (PR-2B)		Z8	574748	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
V 28 S (PR-2B)		Z8	574760	
V 35 S (PR-2B)		Z8	574762	
AHLSELL A-press rostfritt		M 15		570110
		M 18		570120
		M 22		570130
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	AIRBEL PRESSCLIM	M 15		570110
		M 18		570120
M 22			570130	
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
AIRBEL SERTINOX		M 15		570110
		M 18		570120
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	ALB Sistema Multicapa	TH 16*		570460
		TH 18*		570465
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 50 (PZ-S)			572400	
TH 63 (PZ-S)			572405	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
H 16*			570320	
H 18*			570340	
H 20*			570350	
H 26*			570370	
H 32			570380	
H 40 (PZ-46)		570390		
U 16*		570765		
U 18*		570770		
U 20*		570775		
C 26*		570750		
U 32		570785		
U 40		570790		

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
ALB	TH 16*		570460
Sistema Multicap	TH 20*		570470
Gas	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
ALTECH Altech	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
APE MULTYGAS	TH 16*		570460
Serie AP Gas	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
APE Serie AP	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
APE Serie APL	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 18*		570770
	U 20*		570775

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
AQUATECHNIK	H 16*		570320
Press-fitting metal	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
AQUATECHNIK	B 16*		570850
Universal	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
ARKA	H 16*		570320
DUROsystem	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
Aschl NIR	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
ASSOTHERM IPC-RAC Carbon Steel	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	ASSOTHERM IPI-RAX Inox	M 15	
M 18			570120
M 22			570130
M 28			570140
M 35			570150
M 42 (PZ-4G)			570160
M 54 (PZ-4G)			570170
M 42 (PR-3S)		Z2	572706
M 54 (PR-3S)		Z2	572708
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
M 15 S (PR-2B)		Z8	574738
M 18 S (PR-2B)		Z8	574740
M 22 S (PR-2B)		Z8	574742
M 28 S (PR-2B)		Z8	574744
M 35 S (PR-2B)		Z8	574746
ASSOTHERM IPI-RAX Inox Gas		M 15	
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	ASSOTHERM IPM-Multistrato	H 16*	
H 20*			570350
H 26*			570370
H 32			570380
TH 16*			570460
TH 20*			570470
TH 26*			570475
TH 32			570480
THL 32			570487
TH 40			570485
TH 50 (PZ-S)			572400
TH 63 (PZ-S)			572405
TH 16 S (PR-2B)		Z8	574782
TH 20 S (PR-2B)		Z8	574788
TH 26 S (PR-2B)		Z8	574794
TH 32 S (PR-2B)		Z8	574798
U 16*			570765
U 20*			570775
C 26*		570750	
U 32		570785	
ASSOTHERM IPR-RAA Copper	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	ASSOTHERM IPR-RAA Copper Gas	M 15	
M 18			570120
M 22			570130
M 28			570140
M 35			570150
M 15 S (PR-2B)		Z8	574738
M 18 S (PR-2B)		Z8	574740
M 22 S (PR-2B)		Z8	574742
M 28 S (PR-2B)		Z8	574744
M 35 S (PR-2B)		Z8	574746

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US 3/8"		571450	
	US 1/2"		571455	
	US 3/4"		571460	
	US 1"		571465	
	US 1 1/4"		571470	
	US 1 1/2"		571475	
	US 2"		571477	
ATUSA ITALIA SYCPRESS CARBON STEEL PRESS FITTINGS	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)	Z8	574738		
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	ATUSA ITALIA SYCPRESS STAINLESS STEEL PRESS FITTINGS	M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
		M 35		570150
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)	Z8	574738		
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	AUSTEC PEX-B, PEX-AL-PEX (AUS)	TH 16*		570460
		TH 20*		570470
		TH 25*		570495
		TH 32		570480
		U 16*		570765
U 20*			570775	
U 25*			570780	
U 32		570785		
AUSTEC PEX-AL-PEX GAS (AUS)	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 32		570480	
	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
AYOR FIXOCONNECT Press	H 12*		570300	
	H 16*		570320	
	H 20*		570350	
	H 25*		570360	
	RFz 12*		571320	
	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571335	
	U 16*		570765	
	U 20*		570775	
AYOR FIXOMULTIX	U 25*		570780	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788		
TH 26 S (PR-2B)	Z8	574794		
TH 32 S (PR-2B)	Z8	574798		
U 16*		570765		
U 20*		570775		
U 32		570785		
U 40		570790		
U 50		570795		
U 63 (PR-3B)	Z4	572837		
U 63 (PZ-S)		572365		
U 75 (PR-3B)	Z4	572828		
AYOR SOMATHERM FOR YOU -1	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794		
U 16*		570765		
U 20*		570775		

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
AYOR	H 12*		570300
SOMATHERM	H 16*		570320
FOR YOU - 2	H 20*		570350
	H 25*		570360
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	U 16*		570765
	U 20*		570775
	U 25*		570780
B			
Bampi BALPEX serie LP	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 18*		570770
	U 20*		570775
	C 26*		570750
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
Bampi BALPEX serie MP	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
Bampi BALPEX Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
BARBI EASYPRESS (Industrial Blansol)	H 12*		570300
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	
BARBI MULTIPEX (Industrial Blansol)	H 14*		570310	
	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 25*		570360	
	H 26*		570370	
	H 32		570380	
	RFz 16*		571325	
	RFz 18*		571327	
	RFz 20*		571330	
	RFz 25		571335	
	RFz 32		571340	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
U 25*		570780		
U 32		570785		
U 40		570790		
U 50		570795		
U 63 (PR-3B)	Z4	572837		
U 63 (PZ-S)		572365		
BEGETUBE/ IVAR	B 14*		570845	
	B 16*		570850	
	B 18*		570855	
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	Fz 40		570742	
	Fz 50		570747	
	F 63 (PZ-S)		572385	
	Fz 75 (PR-3B)	Z4	572830	
	Béné inox Série 41	M 15		570110
		M 18		570120
		M 22		570130
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76.1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88.9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108.0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)	Z8	574746		
Brass Form Master Press	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	U 16*		570765	
	U 18*		570770	
U 20*		570775		
Brass & Fittings PRESSMAN MultiPress	RFz 16*		571325	
	RFz 18*		571327	
	ACz 20*		572646	
Brass & Fittings PRESSMAN RetiPress	RFz 25		571335	
	RFz 32		571340	
	RFz 16*		571325	
RFz 18*		571327		
ACz 20*		572646		
RFz 25		571335		
RFz 32		571340		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC.
- 4) Driven by REMS Akku-Press XL 45 kN 22 V ACC.
- 5) For taking suitable pressing inserts.
- 6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- 7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- 8) For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
BRASSTECH MULTItermoSAN Brasspress	B 16*		570850	
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	F 16*		570717	
	F 20*		570727	
	F 26*		570730	
	F 16 S (PR-2B)	Z8	574728	
	F 20 S (PR-2B)	Z8	574730	
	F 26 S (PR-2B)	Z8	574732	
	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 26*		570370	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	C 26*		570750	
	U 32		570785	
	C			
	Cello Products >B< Press	VUS ½" (OD 15,9 mm)		571770
VUS ¾" (OD 22,2 mm)			571775	
VUS 1" (OD 28,6 mm)			571780	
VUS 1¼" (OD 34,9 mm)			571785	
VUS 1½" (OD 41,3 mm)			571790	
VUS 2" (OD 54,0 mm)			571795	
CGR DYNAFLU multicouche		H 16*		570320
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 20*		570775	
U 32		570785		
U 40		570790		
U 50		570795		
U 63 (PR-3B)	Z4	572837		
U 63 (PZ-S)		572365		
CGR DYNAFLU PER	H 12*		570300	
	H 16*		570320	
	H 20*		570350	
	H 25*		570360	
	Rfz 12*		571320	
	Rfz 16*		571325	
	Rfz 20*		571330	
	Rfz 25		571335	
CHIALI CHIALIPEX	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
Climatek Clima Therm	TH 14*		570455	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	H 40 A (PZ-4G)		570695	
Climatrix Climatrix Rhinopex	H 16*		570320	
	H 20*		570350	
	U 16*		570765	
	U 20*		570775	
	C 26*		570750	
	TH 14*		570455	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	Climatrix Variotherm System TH	TH 11,6*		570482
TH 16*			570460	
TH 16 S (PR-2B)		Z8	574782	
ClouSet	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
Comap PEX Press	Rfz 12*		571320	
	Rfz 16*		571325	
	Rfz 20*		571330	
	Rfz 25		571335	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Comap Multiskin	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	THL 32		570487
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	Comap Multiskin Gas	TH 16*	
TH 20*			570470
TH 26*			570475
TH 32			570480
THL 32			570487
TH 16 S (PR-2B)		Z8	574782
TH 20 S (PR-2B)		Z8	574788
TH 26 S (PR-2B)		Z8	574794
TH 32 S (PR-2B)		Z8	574798
U 16*			570765
U 20*			570775
U 32			570785
H 16*			570320
H 20*		570350	
H 26*		570370	
H 32		570380	
COMISA Press System	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 14*		570310
	H 16*		570320
	H 18*		570340
H 20*		570350	
H 26*		570370	
H 32		570380	
B 14*		570845	
B 16*		570850	
B 18*		570855	
B 20*		570860	
B 26		570870	
B 32		570880	
COMISA Press System Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	
CONEL CONNECT MULTI	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
H 32		570380	
TH 16*		570460	
TH 20*		570470	
TH 26*		570475	
TH 32		570480	
TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
U 16*		570765	
U 20*		570775	
U 25*		570780	
U 32		570785	
VP 16*		570910	
VP 20*		570915	
VP 32		570925	
(DN 26)			

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	
CONEL CONNECT MV2	F 16*		570717	
	F 20*		570727	
	F 26*		570730	
	F 32		570735	
	F 16 S (PR-2B)	Z8	574728	
	F 20 S (PR-2B)	Z8	574730	
	F 26 S (PR-2B)	Z8	574732	
	F 32 S (PR-2B)	Z8	574734	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	Conex Bänninger >B<- Flex	F 16*		570717
F 18*			570720	
F 20*			570727	
F 32			570735	
F 14 S (PR-2B)		Z8	574728	
F 20 S (PR-2B)		Z8	574730	
F 32 S (PR-2B)		Z8	574734	
H 16*			570320	
H 18*			570340	
H 20*			570350	
H 25*			570360	
H 32			570380	
RFz 16*			571325	
RFz 18*			571327	
RFz 20*			571330	
RFz 25			571335	
RFz 32			571340	
TH 16*			570460	
TH 18*			570465	
TH 20*			570470	
TH 25*			570495	
TH 32			570480	
U 16*			570765	
U 18*		570770		
U 20*		570775		
U 25*		570780		
U 32		570785		
Conex Bänninger >B<- MaxiPro	BMP ¼"		571700	
	BMP ⅜"		571702	
	BMP ½"		571704	
	BMP ⅝"		571706	
	BMP ¾"		571708	
	BMP 7/8"		571710	
	BMP 1"		571712	
	BMP 1 1/8"		571714	
Conex Bänninger >B<- Press	V 12		570107	
	V 14		570112	
	V 15		570115	
	V 16		570117	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 54		570175	
	V 12 S (PR-2B)	Z8	574748	
	V 14 S (PR-2B)	Z8	574800	
	V 15 S (PR-2B)	Z8	574752	
	V 16 S (PR-2B)	Z8	574802	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	Conex Bänninger >B<- Press Carbon	V 15		570115
		V 18		570125
V 22			570135	
V 28			570145	
V 35			570155	
V 42			570165	
V 54			570175	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
V 28 S (PR-2B)		Z8	574760	
V 35 S (PR-2B)		Z8	574762	

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
Conex Bänninger >B<- Press Gas	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 S (PR-2B)	Z8	574748
	V 14 S (PR-2B)	Z8	574800
	V 15 S (PR-2B)	Z8	574752
V 16 S (PR-2B)	Z8	574802	
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
Conex Bänninger >B<- Press Inox	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
Conex Bänninger >B<- Press Solar	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 S (PR-2B)	Z8	574748
	V 14 S (PR-2B)	Z8	574800
	V 15 S (PR-2B)	Z8	574752
V 16 S (PR-2B)	Z8	574802	
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
Conex Bänninger >B<- Press XL carbon	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
Conex Bänninger >B<- Press XL copper	VFz 64,0 (PR-3B)	Z5	572815
	VFz 76,1 (PR-3B) ⁴⁾	Z5	572816
	VFz 88,9 (PR-3B) ⁴⁾	Z5	572817
Conex Bänninger >B<- Press XL stainless	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
Conex Bänninger >B<- Press XL red brass	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
D			
Debrunner Acifer d-a Presssystem C-Stahl	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
DIWAsystems	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
DUOPIPE Systems	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
DW Verbundrohr multitubo systems	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828

E

EBRILLE Isomonflex	U 16*		570765
	U 20*		570775
	U 25*		570780
	H 26*		570370
	TH 26*		570475
	TH 26 S (PR-2B)	Z8	574794
	U 32		570785
EBRILLE Monflex	U 16*		570765
	U 20*		570775
	U 25*		570780
	H 26*		570370
	TH 26*		570475
	TH 26 S (PR-2B)	Z8	574794
	U 32		570785
EFFEBI EFFEBI-PRESS Aisi316 System M Profile ¹⁾	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁵⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
EFFEBI EFFEBI-PRESS Aisi316 System V Profile ¹⁾	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
V 35 S (PR-2B)	Z8	574762	
EFFEBI EFFEBI-PRESS Carbon-S System M Profile ¹⁾	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574738
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
EFFEBI EFFEBI-PRESS Carbon-S System V Profile ¹⁾	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
V 35 S (PR-2B)	Z8	574762	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
EFFEBI EFFEBI-PRESS UNICO	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762		
EFFEBI EFFEBI-PRESS UNICO (GAS)	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762		
EFFEBI PRESSTIGE	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
V 42		570165		
V 42 (PR-2B)	Z2	572850		
V 54		570175		
V 54 (PR-2B)	Z2	572851		
V 15 S (PR-2B)	Z8	574752		
V 18 S (PR-2B)	Z8	574756		
V 22 S (PR-2B)	Z8	574758		
V 28 S (PR-2B)	Z8	574760		
V 35 S (PR-2B)	Z8	574762		
EFFEBI PRESSTIGE 4E05	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	EFFEBI PRESSTIGE-GAS ⁹⁾	M 15		570110
		M 18		570120
		M 22		570130
M 28			570140	
M 35			570150	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
V 15			570115	
V 18			570125	
V 22			570135	
V 28			570145	
V 35			570155	
V 42		570165		
V 42 (PR-2B)	Z2	572850		
V 54		570175		
V 54 (PR-2B)	Z2	572851		
V 15 S (PR-2B)	Z8	574752		
V 18 S (PR-2B)	Z8	574756		
V 22 S (PR-2B)	Z8	574758		
V 28 S (PR-2B)	Z8	574760		
V 35 S (PR-2B)	Z8	574762		
EFFEBI TOF-GAS MULTIPINZA	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	H 40 (PZ-4G)		570390	
	U 16*		570765	
	U 20*		570775	
U 32		570785		

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
EFFEBI	TH 16*		570460
	TOF		570465
	TH 18*		570470
	MULTIPINZA		570475
	TH 20*		570480
	TH 26*		570485
	TH 32		572400
	TH 40		572405
	TH 50 (PZ-S)		574782
	TH 63 (PZ-S)		574788
	TH 16 S (PR-2B)	Z8	574794
	TH 20 S (PR-2B)	Z8	574798
	TH 26 S (PR-2B)	Z8	570717
	TH 32 S (PR-2B)	Z8	570720
	F 16*		570727
	F 18*		570730
	F 20*		570735
	F 26*		570742
	F 32		570747
	Fz 40		572385
	Fz 50		574728
	F 63 (PZ-S)		574730
	F 16 S (PR-2B)	Z8	574732
	F 20 S (PR-2B)	Z8	574734
	F 26 S (PR-2B)	Z8	570320
	F 32 S (PR-2B)	Z8	570340
	H 16*		570350
	H 18*		570370
	H 20*		570380
	H 26*		570390
	H 32		570765
	H 40 (PZ-4G)		570770
	U 16*		570775
	U 18*		570780
	U 20*		570750
	U 25*		570785
	C 26*		570790
	U 32		570795
	U 40		572837
	U 50		572365
	U 63 (PR-3B)	Z4	570850
	U 63 (PZ-S)		570855
	B 16*		570860
	B 18*		570870
	B 20*		570880
	B 26		570765
	B 32		570770
EFIELD MULTILAYER PRESS DINGAS	U 16*		570775
	U 18*		570780
	U 20*		570785
	U 25*		570785
	U 32		570785
EFIELD MULTILAYER PRESS WATER	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
Elkhart APOLLOXPRESS Fittings Copper and Low-Lead Brass	VUS 1/2" (OD 15,9 mm)		571770
	VUS 3/4" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1 1/4" (OD 34,9 mm)		571785
	VUS 1 1/2" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
Elkhart APOLLOXPRESS LD-C Fittings Copper	VUSFz 2 1/2" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
ELYDAN izeo	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571337
	RFz 32		571342
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
EMMETI GERPEX-FIVPRESS	B 16*		570850	
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	H 16*		570320	
	H 20*		570350	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	U 16*		570765	
U 20*		570775		
EMPUR	TH 14*		570455	
	TH 15*		570457	
	TH 16*		570460	
	TH 17*		570462	
	TH 20*		570470	
	TH 25*		570495	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	Esta Rohr simplesta SH M	M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
		M 35		570150
		M 42 (PZ-4G)		570160
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76.1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88.9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108.0 G XL (PR-3S) ⁸⁾		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		
Esta Rohr simplesta ST M	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PZ-4G)		570160	
	M 54 (PZ-4G)		570170	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88.9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108.0 G XL (PR-3S) ⁸⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		
EUROTUBI EUROPA C-Steel Pressfitting System M-Profile ¹⁾	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88.9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108.0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 12 S (PR-2B)	Z8	574736	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
EUROTUBI	M 15		570110
EUROPA	M 18		570120
Inox Pressfitting	M 22		570130
System M-Profile ¹⁾	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
Evans	VAU 15 (1/2")		572687
Components	VAU 20 (3/4")		572689
Presslok	VAU 25 (1")		572691
	ECI 1 1/2"		571932
	ECI 2" (PZ-4G)		571934
	ECI 2 1/2" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579104
	ECI 3" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579105
	ECI 4" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579106

F

FAR Rubinetterie	TH 14*		570455
PRESSFAR	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
F.B.Q. BARONIO	V 12		570107
BQ PRESS SOLAR	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
F.B.Q. BARONIO	V 12		570107
BQ PRESS WATER	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
F.B.Q. BARONIO	V 15		570115
BQ PRESS C-STEEL	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
F.B.Q. BARONIO	V 12		570107
BQ PRESS GAS	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
Fercofloor	Rfz 16*		571325
DUO Press	Rfz 20*		571330
FERCO PEX	Rfz 25		571335
	Rfz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
Fercofloor	Rfz 16*		571325
DUO Press	Rfz 20*		571330
MULTIFER	Rfz 25		571335
	Rfz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
FERRO systems	TH 16*		570460
BRASELLI	TH 20*		570470
GPF GAS	TH 25*		570495
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
FERRO systems	U 16*		570765
BRASELLI	U 18*		570770
GPF MULT	U 20*		570775
Pressfitting	U 25*		570780
MULTICAPA	U 32		570785
	U 40		570790
	U 50		570795
FERRO systems	U 16*		570765
BRASELLI	U 18*		570770
GPF PPSU	U 20*		570775
Pressfitting	U 25*		570780
PEX y MULTICAPA	U 32		570785
	U 40		570790
	U 50		570795
FERRO systems	Rfz 16*		571325
BRASELLI	Rfz 20*		571330
GPF PRESS	Rfz 25		571335
Pressfitting PEX	Rfz 32		571340
FILINOX	FTB 15		571432
Fitpress	FTB 18		571434
	FTB 22		571436
	FTB 28		571438
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579111
FILINOX	M 15		570110
Instalpress Steel	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FILINOX Instalpress Inox	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76.1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101
	M 88.9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110
	M 108.0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	Fittings Estándar ECO-PRESS	Rfz 16*	
Rfz 20*			571330
Rfz 25			571335
Rfz 32			571340
Fittings Estándar MULTICAPA	Rfz 16*		571325
	Rfz 18*		571327
	Rfz 20*		571330
	Rfz 25		571335
Fittings Estándar PE-X	Rfz 16*		571325
	Rfz 20*		571330
	Rfz 25		571335
	Rfz 32		571340
FORNARA ForPress	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	
U 16*		570765	
U 20*		570775	
C 26*		570750	
U 32		570785	
FORZA WATER CRIMP (AUS)	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
	K1/50		572625
FORZA STAINLESS WATER CRIMP	K16/P18*		572600
	K/20*		572605
FORZA STESSO PEX WATER AND GAS CRIMP (AUS)	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
FORZA GAS CRIMP (AUS)	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
K1/50		572625	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FORZA COPPER V PRESS (AUS)	VAU 15 (OD 12,7 mm)		572687
	VAU 20 (OD 19,1 mm)		572689
	VAU 25 (OD 25,4 mm)		572691
	VAU 32 (OD 31,8 mm)		572693
	VAU 40 (OD 38,1 mm)		572695
	VAU 50 (OD 50,8 mm)		572697
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804
VAU 20 S (PR-2B) (OD 19,1 mm)	Z8	574806	
VAU 25 S (PR-2B) (OD 25,4 mm)	Z8	574808	
FORZA STAINLESS V PRESS (AUS)	V 15		570115
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	M 76.1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101
	M 88.9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110
	M 108.0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111
	V 15 S (PR-2B)	Z8	574752
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
FRABO FRABOPRESS 316 GAS M	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
FRABO FRABOPRESS 316 GAS V	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 15 S (PR-2B)	Z8	574752
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
FRABO FRABOPRESS 316 M	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 66.7 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579107
	M 76.1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101
	M 88.9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110
M 108.0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111	
M 15 S (PR-2B)	Z8	574738	
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
FRABO FRABOPRESS 316 V	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 15 S (PR-2B)	Z8	574752
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
FRABO FRABOPRESS CHROME	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
FRABO FRABOPRESS C-STEEL M	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
FRABO FRABOPRESS C-STEEL V	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	FRABO FRABOPRESS GAS M	V 12		570107
		V 15		570115
V 18			570125	
V 22			570135	
V 28			570145	
V 35			570155	
V 42			570165	
V 42 (PR-2B)		Z2	572850	
V 54			570175	
V 54 (PR-2B)		Z2	572851	
V 12 S (PR-2B)		Z8	574748	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
FRABO FRABOPRESS GAS V	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 12 S (PR-2B)	Z8	574736	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
FRABO FRABOPRESS KOMBI	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	V 12		570107	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110		
M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111		
FRABO FRABOPRESS M	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107		
M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101		
M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110		
M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111		
M 12 S (PR-2B)	Z8	574736		
M 15 S (PR-2B)	Z8	574738		
M 18 S (PR-2B)	Z8	574740		
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FRABO FRABOPRESS SOLAR	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 15 S (PR-2B)	Z8	574752
FRABO FRABOPRESS V	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
	V 12		570107
	V 15		570115
Fränkische alpex-duo XS	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
Fränkische alpex F50 PROFI	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
(DN 26)	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
TH 26*		570475	
TH 32		570480	
TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
U 16*		570765	
U 20*		570775	
U 25*		570780	
U 32		570785	
VP 16*		570910	
VP 20*		570915	
VP 32		570925	
Fränkische alpex L	Fz 40		570742
	Fz 50		570747
	F 63 (PZ-S)		572385
	Fz 75 (PR-3B)	Z4	572830
G			
gabotherm H+S	TH 10*		570467
	TH 12*		570452
	TH 14*		570455
	TH 15*		570457
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
Gallagher USA YogaPipe ACR	H 12* (1/4")		570300
	U 14* (3/8")		570760
	U 16* (1/2")		570765
	U 18* (5/8")		570770
	U 20* (3/4")		570775
	U 25* (5/8")		570780
U 32 (1 1/8")		570785	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Geberit Mapress C-STAHL	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 66,7 XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
Geberit Mapress Edeltstahl	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	Geberit Mapress Edeltstahl Gas	M 15	
M 18			570120
M 22			570130
M 28			570140
M 35			570150
M 35 (PR-3S)		Z2	572727
M 42 (PR-3S)		Z2	572706
M 54 (PR-3S)		Z2	572708
M 76,1 XL (PR-3S)		27 XL 45 kN ⁴⁾	579101
M 88,9 G XL (PR-3S) ⁷⁾		27 XL 45 kN ⁴⁾	579110
M 108,0 G XL (PR-3S) ⁷⁾		27 XL 45 kN ⁴⁾	579111
M 15 S (PR-2B)		Z8	574738
M 18 S (PR-2B)		Z8	574740
M 22 S (PR-2B)		Z8	574742
M 28 S (PR-2B)		Z8	574744
M 35 45° (P R-2B)	Z8	574746	
Geberit Mapress Kupfer	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 66,7 XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	26 XL ²⁾ / 27 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Geberit Mapress Kupfer Gas	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
Geberit Mepla	G 16*		570400
	G 20*		570410
	G 26*		570420
	G 32		570430
	G 40		570440
	G 50		570450
	G 63 (PZ-S)		572470
Geberit Mepla Therm	G 16*		570400
	G 20*		570410
Geberit Volex	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
General Fittings 5T00	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
U 16*		570765	
U 20*		570775	
U 32		570785	
U 40		570790	
U 63 (PZ-S)		572365	
U 63 (PR-3B)	Z4	572837	
General Fittings Ewoprex	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
U 16*		570765	
U 20*		570775	
U 32		570785	
U 40		570790	
U 63 (PZ-S)		572365	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
General Fittings Serie 5S00	B 16*		570850	
	B 18*		570855	
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	F 16*		570717	
	F 20*		570727	
	F 26*		570730	
	F 32		570735	
	F 16 S (PR-2B)	Z8	574728	
	F 20 S (PR-2B)	Z8	574730	
	F 26 S (PR-2B)	Z8	574732	
	F 32 S (PR-2B)	Z8	574734	
	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 25*		570360	
	H 26*		570370	
	H 32		570380	
	H 40 (PZ-4G)		570390	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 63 (PZ-S)		572365	
	U 63 (PR-3B)	Z4	572837	
	General Fittings Trident	B 16*		570850
		F 16*		570717
F 16 S (PR-2B)		Z8	574728	
H 16*			570320	
H 20*			570350	
H 26*			570370	
H 32			570380	
TH 16*			570460	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
U 16*			570765	
U 20*			570775	
U 32		570785		
General Fittings Trident Gas	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
Giacomini Raccordi RM Giacomini	H 32		570380	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	U 16*		570765	
	U 20*		570775	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	Giacomini RM MULTIGAS	H 16*		570320
H 20*			570350	
H 26*			570370	
H 32			570380	
TH 16*			570460	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
U 16*			570765	
U 20*			570775	
U 32			570785	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Giacomini Valvole Giacomini serie R850V	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 54		570175	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	SA 15		570935	
	SA 18		570940	
	SA 22		570945	
	SA 28		570950	
	SA 35		570955	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	Golan Pipe Systems (Scandinavia) Alu-Pres	U 16*		570765
		U 20*		570775
		U 25*		570780
		U 32		570785
U 40			570790	
U 50			570795	
U 63 (PZ-S)			572365	
U 63 (PR-3B)	Z4	572837		
U 75 (PR-3B)	Z4	572828		
Grinnell G-PRESS Copper Fittings	VUS ½" (OD 15,9 mm)		571770	
	VUS ¾" (OD 22,2 mm)		571775	
	VUS 1" (OD 28,6 mm)		571780	
	VUS 1¼" (OD 34,9 mm)		571785	
	VUS 1½" (OD 41,3 mm)		571790	
	VUS 2" (OD 54,0 mm)		571795	
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819	
VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820		
VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821		
GS Wärmesysteme System TH	TH 14*		570455	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798		
GS Wärmesysteme System V	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	H			
HakaGerodur HAKASAN	TH 10*		570467	
	TH 11,6*		570482	
	TH 12*		570452	
	TH 14*		570455	
	TH 16*		570460	
	TH 17*		570462	
	TH 18*		570465	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794		
TH 32 S (PR-2B)	Z8	574798		
HASTINIK Hastinik/Hitpress	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PZ-4G)		570160	
	M 54 (PZ-4G)		570170	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
heima24	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	HELIROMA Klimapress	U 16*	
U 18*			570770
U 20*			570775
U 25*			570780
U 32			570785
U 40			570790
U 50			570795
U 63 (PR-3B)		Z4	572837
U 63 (PZ-S)			572365
U 75 (PR-3B)		Z4	572828
HELIROMA Romapress	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
Henco	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	HE 32		571900
	HEz 40		571904
	Herotec TEMPUS-PRESS PLUS	H 16*	
H 20*			570350
H 25*			570360
H 32			570380
H 40 (PZ-4G)			570390
RFz 16*			571325
RFz 20*			571330
RFz 25			571335
RFz 32			571340
TH 16*			570460
TH 20*			570470
TH 25*			570495
TH 32			570480
TH 40			570485
TH 50 (PZ-S)			572400
TH 63 (PZ-S)			572405
TH 16 S (PR-2B)		Z8	574782
TH 20 S (PR-2B)		Z8	574788
TH 32 S (PR-2B)		Z8	574798
U 16*			570765
U 20*			570775
U 25*			570780
U 32			570785
U 40		570790	
U 50		570795	
U 63 (PZ-S)		572365	
U 63 (PR-3B)	Z4	572837	
U 75 (PR-3B)	Z4	572828	

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
Herotec TEMPUS-PRESS PLUS PPSU	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
U 50		570795	
U 63 (PZ-S)		572365	
U 63 (PR-3B)	Z4	572837	
U 75 (PR-3B)	Z4	572828	
HERZ PIPEFIX	TH 10*		570467
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
HIDRONIX MULTIGAS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
HIDRONIX MULTIPIPE	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 14*		570760
	U 16*		570765
	U 18*		570770
U 20*		570775	
C 26*		570750	
U 32		570785	
HIDRONIX UNICO	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 14*		570760
	U 16*		570765
	U 18*		570770
U 20*		570775	
C 26*		570750	
U 32		570785	
HITEC Sistema Multistrato	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- Driven by REMS Power-Press XL ACC.
- Driven by REMS Akku-Press XL 45 kN 22 V ACC.
- For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- For making press joints for operating pressure \leq PN 10.
- For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
HITHERM-ISOTUBI NUMEPRESS	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	HITHERM HTpress	M 15		570110
		M 18		570120
M 22			570130	
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
HITHERM HTfire		M 15		570110
		M 18		570120
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	HITHERM HTair	M 15		570110
		M 18		570120
M 22			570130	
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
Hopewell press fit system		M 15		570110
		M 18		570120
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PZ-4G)		570160	
	M 54 (PZ-4G)		570170	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	hp praski BAVARIA-press	TH 10*		570467
		TH 12*		570452
		TH 14*		570455
TH 16*			570460	
TH 17*			570462	
TH 20*			570470	
TH 25*			570495	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
ICMA Sempiter		H 16*		570320
		H 20*		570350
		H 25*		570360
	H 26*		570370	
	H 32		570380	
	H 40 (PZ-4G)		570390	
	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	C 26*		570750	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PR-3B)	Z4	572837	
	U 63 (PZ-S)		572365	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
ICMA Sempigas	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	Idrosanitaria Bonomi Homegas	TH 16*		570460
TH 20*			570470	
TH 26*			570475	
TH 16 S (PR-2B)		Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	Idrosanitaria Bonomi Idropress	TH 16*		570460
		TH 18*		570465
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 50 (PZ-S)			572400	
TH 63 (PZ-S)			572405	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
IDROSISTEMI Ta-Press	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	F 16*		570717	
	F 20*		570727	
	F 26*		570730	
	F 32		570735	
	F 16 S (PR-2B)	Z8	574728	
	F 20 S (PR-2B)	Z8	574730	
F 26 S (PR-2B)	Z8	574732		
F 32 S (PR-2B)	Z8	574734		
Fz 40		570742		
Fz 50		570747		
F 63 (PZ-S)		572385		
H 16*		570320		
H 20*		570350		
H 26*		570370		
H 32		570380		
H 40 (PZ-4G)		570390		
U 16*		570765		
U 20*		570775		
C 26*		570750		
U 32		570785		
U 40		570790		
U 50		570795		
U 63 (PZ-S)		572365		
B 16*		570850		
B 20*		570860		
B 26		570870		
B 32		570880		
IDROTRADE Storm Multipinza	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	THL 32		570487	
	TH 40		570485	
IDROTRADE StormPRES ¹⁾	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 20*		570775	
	M 15		570110	
	M 18		570120	
M 22		570130		
M 28		570140		
M 35		570150		
M 42 (PR-3S)	Z2	572706		
M 54 (PR-3S)	Z2	572708		
M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101		
M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110		
M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111		
M 15 S (PR-2B)	Z8	574738		
M 18 S (PR-2B)	Z8	574740		
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
IDROTRADE StormSTEEL ¹⁾	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76.1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101	
	M 88.9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110	
	M 108.0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111	
	M 12 S (PR-2B)	Z8	574736	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	ILTA INOX/CHIBRO Pressfitting Cuni	M 15		570110
		M 18		570120
		M 22		570130
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76.1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88.9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108.0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)	Z8	574746		
ILTA INOX/CHIBRO Pressfitting inox	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88.9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108.0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746		
Instantor Press System	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
Instantor Copper Press Metric	M 15		570110	
	M 22		570130	
	M 28		570140	
	M 15 S (PR-2B)	Z8	574738	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
IPA IPANA Press	TH 10*		570467	
	TH 11,6*		570482	
	TH 12*		570452	
	TH 14*		570455	
	TH 15*		570457	
	TH 16*		570460	
	TH 17*		570462	
	TH 18*		570465	
	TH 20*		570470	
	TH 22*		570472	
	TH 25*		570495	
	TH 26*		570475	
	TH 28		570477	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	THz 75 (PR-3B)	Z4	572829	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IPA THu IPANA Press	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 16 S (PR-2B)	Z8	574782
IPALPEX (Industrie du Plastique et Accessoires)	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	THL 32		570487
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	K16/P18*		572600
IPLEX PIPELINES AUSTRALIA Iplex K1 (Gas)	PF 22*		571980
	K16/P18*		572600
	K/20*		572605
	K/25*		572610
IPLEX PIPELINES AUSTRALIA Iplex K2	K32		572615
	K1/40		572620
	K1/50		572625
	K16/P18*		572600
ISOLUBEX IPERT	K/20*		572605
	K/25*		572610
	RFz 16*		571325
	RFz 20*		571330
ISOLUBEX Multicapa	RFz 25		571337
	RFz 32		571342
	RFz 16*		571325
	RFz 18*		571327
ISOLUBEX Multicapa-PPSU	RFz 20*		571330
	RFz 25		571337
	RFz 32		571342
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
ISOTUBI NUMEPRESS	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	RFz 16*		571325
	RFz 20*		571330
IVAR ALPEX-GAS	RFz 25		571337
	RFz 32		571342
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
M 35		570150	
ALPEX-GAS	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76.1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88.9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108.0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
B 20		570860	
B 26		570870	
B 32		570880	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
IVAR Ivar-Press	B 14*		570845	
	B 16*		570850	
	B 18*		570855	
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	Fz 40		570742	
	Fz 50		570747	
	F 63 (PZ-S)		572385	
	IVAR MULTI PRESS GAS	TH 16*		570460
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
B 16*			570850	
B 20*			570860	
B 26			570870	
IVAR MULTI PRESS GAS ITALIA	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	U 16*		570765	
IVAR Multi Press MP	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	F 16*		570717	
	F 18*		570720	
	F 20*		570727	
	F 26*		570730	
	F 32		570735	
	Fz 40		570742	
	Fz 50		570747	
	F 63 (PZ-S)		572385	
	F 16 S (PR-2B)	Z8	574728	
	F 20 S (PR-2B)	Z8	574730	
	F 26 S (PR-2B)	Z8	574732	
	F 32 S (PR-2B)	Z8	574734	
	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 25*		570360	
	H 26*		570370	
	H 32		570380	
	H 40 (PZ-4G)		570390	
	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	U 25*		570780	
	C 26*		570750	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	B 16*		570850	
	B 18*		570855	
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	IVAR Multi Press Leak (MPL)	TH 16*		570460
		TH 20*		570470
		TH 26*		570475
		TH 32		570480
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
F 16*			570717	
F 20*			570727	
F 26*			570730	
F 32			570735	
F 16 S (PR-2B)		Z8	574728	
F 20 S (PR-2B)		Z8	574730	
F 26 S (PR-2B)		Z8	574732	
F 32 S (PR-2B)		Z8	574734	
H 16*			570320	
H 20*			570350	
H 26*			570370	
H 32			570380	
U 16*		570765		
U 20*		570775		
C 26*		570750		
U 32		570785		
B 16*		570850		
B 20*		570860		
B 26		570870		
B 32		570880		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
IVAR Plastic Multi Press Leak (PMPL)	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	F 16*		570717	
	F 20*		570727	
	F 26*		570730	
	F 32		570735	
	F 16 S (PR-2B)	Z8	574728	
	F 20 S (PR-2B)	Z8	574730	
	F 26 S (PR-2B)	Z8	574732	
	F 32 S (PR-2B)	Z8	574734	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	IVAR Plastic Multi Press PMP	TH 16*		570460
TH 20*			570470	
TH 25*			570495	
TH 26*			570475	
TH 32			570480	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
F 16*			570717	
F 20*			570727	
F 26*			570730	
F 32			570735	
F 16 S (PR-2B)		Z8	574728	
F 20 S (PR-2B)		Z8	574730	
F 26 S (PR-2B)		Z8	574732	
F 32 S (PR-2B)		Z8	574734	
H 16*			570320	
H 20*			570350	
H 25*			570360	
H 26*		570370		
H 32		570380		
U 16*		570765		
U 20*		570775		
U 25*		570780		
C 26*		570750		
U 32		570785		
B 16*		570850		
B 20*		570860		
B 26		570870		
B 32		570880		
IVT Edelstahl- Presssystem	M 15		570110	
	M 18 ¹⁾		570120	
	M 22		570130	
	M 28 ¹⁾		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76.1 XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ³⁾	579101	
	M 88.9 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ³⁾	579110	
	M 108.0 G XL (PR-3S)	Z6 XL ²⁾ / Z7 XL 45 kN ³⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
IVT PRIPRESS	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
Jäger - Aquatec Aquapress H	H 14*		570310	
	H 16*		570320	
	H 17*		570330	
	H 18*		570340	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	Jäger - Aquatec C-Stahl - Press Typ M	M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
		M 35		570150
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76.1 XL (PR-3S)		Z6 XL ²⁾ / Z7 XL 45 kN ³⁾	579101	
M 88.9 G XL (PR-3S)		Z6 XL ²⁾ / Z7 XL 45 kN ³⁾	579110	
M 108.0 G XL (PR-3S)		Z6 XL ²⁾ / Z7 XL 45 kN ³⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Jäger - Aquatec Edelstahl - Press Typ M	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
Jäger - Aquatec Kupfer - Press Typ V	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	Jansen AG JANSEN COMISA	TH 14*		570455
TH 16*			570460	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 50 (PZ-S)			572400	
TH 63 (PZ-S)			572405	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
Jarafflex- Presssystem		TH 14*		570455
		TH 16*		570460
		TH 17*		570462
	TH 18*		570465	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
JUNGWOO JWPress	VUS 1/2" (OD 15,9 mm)		571770	
	VUS 3/4" (OD 22,2 mm)		571775	
	VUS 1" (OD 28,6 mm)		571780	
	VUS 1 1/4" (OD 34,9 mm)		571785	
	VUS 1 1/2" (OD 41,3 mm)		571790	
	VUS 2" (OD 54,0 mm)		571795	
	VUSFz 2 1/2" (PR-3B) (OD 66,7 mm)	Z5	572819	
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820	
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821	
	K			
KAN KAN-therm Press	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	C 26*		570750	
	U 32		570785	
	U 40		570790	
	TH 50 (PZ-S)		572400	
TH 63 (PZ-S)		572405		

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
KAN KAN-therm Press LBP	U 14*		570760
	U 16*		570765
	U 20*		570775
	U 25*		570780
	C 26*		570750
	U 32		570785
	U 40		570790
	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
TH 63 (PZ-S)		572405	
TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	
KAN KAN-therm Inox	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
KAN KAN-therm Steel	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736
M 15 S (PR-2B)	Z8	574738	
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
KAN KAN-therm UltraPRESS	U 14*		570760
	U 16*		570765
	U 20*		570775
	U 25*		570780
	C 26*		570750
	U 32		570785
	U 40		570790
	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
TH 63 (PZ-S)		572405	
TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794	
TH 32 S (PR-2B)	Z8	574798	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
KE KELIT COPPERFIX Kupfer	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	KE KELIT KELIT KELOX	U 16*		570765
		U 18*		570770
		U 20*		570775
U 25*			570780	
U 32			570785	
U 40			570790	
U 50			570795	
U 63 (PZ-S)			572365	
U 63 (PR-3B)		Z4	572837	
U 75 (PR-3B)		Z4	572828	
KE KELIT KELOX-PPSU-W	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	U 63 (PR-3B)	Z4	572837	
	U 75 (PR-3B)	Z4	572828	
KE KELIT KELOX-ULTRAX	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	U 63 (PR-3B)	Z4	572837	
	U 75 (PR-3B)	Z4	572828	
KE KELIT KELOX-ULTRAX-W	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	U 63 (PR-3B)	Z4	572837	
	U 75 (PR-3B)	Z4	572828	
KE KELIT KELOX-WINDOWX-U	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	U 63 (PR-3B)	Z4	572837	
	U 75 (PR-3B)	Z4	572828	
KE KELIT steelFIX C-Stahl	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	KE KELIT steelFIX Edelstahl	M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
		M 35		570150
		M 42 (PR-3S)	Z2	572706
		M 54 (PR-3S)	Z2	572708
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
KEMBLA KemPress (AUS)		VAU 15 (OD 12,7 mm)		572687
	VAU 20 (OD 19,1 mm)		572689	
	VAU 25 (OD 25,4 mm)		572691	
	VAU 32 (OD 31,8 mm)		572693	
	VAU 40 (OD 38,1 mm)		572695	
	VAU 50 (OD 50,8 mm)		572697	
KEMBLA KemPress Gas (AUS)	VAU 15 (OD 12,7 mm)		572687	
	VAU 20 (OD 19,1 mm)		572689	
	VAU 25 (OD 25,4 mm)		572691	
	VAU 32 (OD 31,8 mm)		572693	
	VAU 40 (OD 38,1 mm)		572695	
	VAU 50 (OD 50,8 mm)		572697	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
KISAN Kisan KD	KI 16*		571360
	KI 20*		571370
	KI 25*		571375
	TH 16*		570460
	TH 20*		570470
KISAN Kisan WL	TH 25*		570495
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	KI 16*		571360
	KI 20*		571370
KISAN Kisan WM	KI 25*		571375
	KI 32		571380
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
KISAN Kisan WR	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	KI 16*		571360
KISAN Kisan WR	KI 20*		571370
	KI 25*		571375
	KI 32		571380
	U 20*		570775
	U 25*		570780
KISAN Kistal C	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572837
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
M 35		570150	
KISAN Kistal Inox	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
LEGEND-PRESS press fitting system	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	VUS 1/2" (OD 15,9 mm)		571770
	VUS 3/4" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1 1/4" (OD 34,9 mm)		571785
	VUS 1 1/2" (OD 41,3 mm)		571790
VUS 2" (OD 54,0 mm)		571795	
VUSFz 2 1/2" (PR-3B) (OD 66,7 mm)	Z5	572819	
VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820	
VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821	
LK Systems LK >B-Press	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
	LK Systems LK >B-Press Eltörzinkat	V 12	
V 15			570115
V 18			570125
V 22			570135
V 28			570145
V 35			570155
V 42			570165
V 54			570175
V 12 S (PR-2B)		Z8	574748
V 15 S (PR-2B)		Z8	574752
V 18 S (PR-2B)		Z8	574756
V 22 S (PR-2B)		Z8	574758
V 28 S (PR-2B)		Z8	574760
V 35 S (PR-2B)		Z8	574762

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
LK Systems	V 15		570115
LK >B-Press	V 18		570125
Gas	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
LK Systems	TH 16*		570460
LK Universal	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
LVI-DAHL	U 16*		570765
Altech-Alupex	U 20*		570775
	U 25*		570780
	U 32		570785
M			
MAINCOR	U 16*		570765
MAINPRESS	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
MAINCOR	U 16*		570765
MAINFLOR	U 20*		570775
Mair Heiztechnik	H 11,5*		570315
M-Press	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
Ma.s.ter System	TH 14*		570455
PRESSMASTER	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-46)		570390
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
Meier Tobler	H 16*		570320
Metalplast - Stramax	H 20*		570350
Serie MM	H 25*		570360
	H 32		570380
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
METALGRUP	U 16*		570765
Permatubo	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
METALGRUP	RFz 16*		571325
PexGrup	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
METALGRUP	U 16*		570765
MultiGrup	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
Mueller Industries	VUS ½" (OD 15,9 mm)		571770
Streamline PRS	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1¼" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
MULTITHERM	TH 16*		570460
PRESSSYSTEM	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
Multicapas Industrial	RFz 16*		571325
AIS PEX	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC.
- 4) Driven by REMS Akku-Press XL 45 kN 22 V ACC.
- 5) For taking suitable pressing inserts.
- 6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- 7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- 8) For making press joints for operating pressure ≤ PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Multicap Industrial AIS XPRT	H 16*		570320	
	H 20*		570350	
	H 25*		570360	
	H 26*		570370	
	H 32		570380	
	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571335	
	RFz 32		571340	
	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	THz 75 (PR-3B)	Z4	572829	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	U 63 (PR-3B)	Z4	572837	
	U 75 (PR-3B)	Z4	572828	
	Multicap Industrial multitubo systems MC	U 16*		570765
		U 18*		570770
U 20*			570775	
U 25*			570780	
U 32			570785	
U 40			570790	
U 50			570795	
U 63 (PZ-S)			572365	
U 63 (PR-3B)		Z4	572837	
U 75 (PR-3B)		Z4	572828	
Multicap Industrial multitubo systems MM	H 16*		570320	
	H 20*		570350	
	H 25*		570360	
	H 26*		570370	
	H 32		570380	
	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571335	
	RFz 32		571340	
	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	THz 75 (PR-3B)	Z4	572829	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	U 63 (PR-3B)	Z4	572837	
	U 75 (PR-3B)	Z4	572828	
	N			
	NEUTHERM MEKUPRESS-HT	H 16*		570320
H 20*			570350	
H 26*			570370	
H 32			570380	
H 40 (PZ-4G)			570390	
U 40			570790	
NIBCO (USA) Press System Copper	VUS 1/2" (OD 15,9 mm)		571770	
	VUS 3/4" (OD 22,2 mm)		571775	
	VUS 1" (OD 28,6 mm)		571780	
	VUS 1 1/4" (OD 34,9 mm)		571785	
	VUS 1 1/2" (OD 41,3 mm)		571790	
VUS 2" (OD 54,0 mm)		571795		
NICOLL FLUXO	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	THz 75 (PR-3B)	Z4	572829	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
NUPI Industrie Italiana Multinupi	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 18*		570720
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 14*		570760
	U 16*		570765
	U 18*		570770
U 20*		570775	
U 25*		570780	
C 26*		570750	
U 32		570785	
U 40		570790	
U 50		570795	
U 63 (PR-3B)	Z4	572837	
U 63 (PZ-S)		572365	
Nussbaum Optifitt-Press	VMP 3/8" (OD 17,2 mm)		571740
	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844	
VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845	
Nussbaum Optiflex-Flowpress	VRX 16		571750
	VRX 20		571752
	VRX 25		571754
	VRX 32		571756
	VRX 40		571758
	VRX 50		571760
	VRX 63		571797
Nussbaum Optipress Aquaplus	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B)	Z5	572815
	Vfz 76,1 (PR-3B)	Z5	572816
	Vfz 88,9 (PR-3B)	Z5	572817
	Vfz 108,0 (PR-3B)	Z5	572818
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
Nussbaum Optipress-Gaz	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B)	Z5	572815
Nussbaum Optipress-Therm	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B)	Z5	572815

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
O			
Oventrop Cofit P	H 16 A*		570620
	H 20 A*		570650
	H 26 A*		570670
	H 32 A		570680
	H 40 A		570690
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
Oventrop Cofit PD	H 16 A*		570620
	H 20 A*		570650
	H 26 A*		570670
Oventrop Cofit PDK	H 16 A*		570620
	H 20 A*		570650
Oventrop Cofit PD-HT	H 16 A*		570620
	H 20 A*		570650
	H 25 A*		570660
	H 32 A		570680
Oventrop Cofit PDK-HT	H 16 A*		570620
	H 20 A*		570650
P			
PB Tub SERTIPRESS	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
PB Tub SERTI-STEEL	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
	Pegler Yorkshire XPress Carbon	M 12	
M 15			570110
M 18 ¹⁾			570120
M 22			570130
M 28 ¹⁾			570140
M 35			570150
M 42 (PR-3S)		Z2	572706
M 54 (PR-3S)		Z2	572708
XP 66,7 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
M 12 S (PR-2B)		Z8	574736
M 15 S (PR-2B)		Z8	574738
M 18 S (PR-2B)		Z8	574740
M 22 S (PR-2B)		Z8	574742
M 28 S (PR-2B)		Z8	574744
M 35 S (PR-2B)		Z8	574746
Pegler Yorkshire XPress Copper		M 12	
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109
	M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.	
Pegler Yorkshire XPress Copper Gas	M 15		570110	
	M 18 ¹⁾		570120	
	M 22		570130	
	M 28 ¹⁾		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
Pegler Yorkshire XPress Stainless	M 15		570110	
	M 18 ¹⁾		570120	
	M 22		570130	
	M 28 ¹⁾		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
		M 54 (PR-3S)	Z2	572708
		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
PERFEXIM PERFEKT SYSTEM	U 16*		570765	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	PERFILTUBO PERFILALUPEX	U 16*		570765
		U 18*		570770
		U 20*		570775
		U 25*		570780
		U 32		570785
		U 40		570790
	U 50		570795	
	U 63 (PR-3B)	Z4	572837	
	U 63 (PZ-S)		572365	
	U 75 (PR-3B)	Z4	572828	
PERFILTUBO PERFILPRESS	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
PEXTUBE PexTube	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571337	
	RFz 32		571342	
	Pipelife C-PRESS	M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
		M 35		570150
		M 42 (PR-3S)	Z2	572706
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Pipelife RADOPRESS	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	Pipetec Connect	TH 16*	
TH 20*			570470
TH 26*			570475
TH 32			570480
TH 40			570485
TH 50 (PZ-S)			572400
TH 63 (PZ-S)			572405
TH 16 S (PR-2B)		Z8	574782
TH 20 S (PR-2B)		Z8	574788
TH 26 S (PR-2B)		Z8	574794
TH 32 S (PR-2B)		Z8	574798
U 16*			570765
U 20*			570775
U 25*		570780	
U 32		570785	
PLASTICA ALFA Multypex	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
PLASTICA ALFA Multypex Air	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
PLASTICA ALFA Multypexalfa Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	PLASTICA ALFA Multypexalfa Gas protek	TH 16*	
TH 20*			570470
TH 26*			570475
TH 16 S (PR-2B)		Z8	574782
TH 20 S (PR-2B)		Z8	574788
TH 26 S (PR-2B)		Z8	574794
PLASTICA ALFA Multypex Plus		TH 16*	
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
PLASTICA ALFA Multypex Thermo	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
PLASTICA ALFA Multypex Thermo Plus	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
PLÁSTICOS FERRO	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	FERROPLAST GPF MULT Pressfitting MULTICAPA	U 16*	
U 20*			570775
U 25*			570780
U 32			570785
FERROPLAST GPF PPSU Pressfitting PEX y MULTICAPA		U 16*	
	U 20*		570775
	U 25*		570780
	U 32		570785
	PLÁSTICOS FERRO FERROPLAST GPF PRESS Pressfitting PEX	Rfz 16*	
Rfz 20*			571330
Rfz 25			571335
Rfz 32			571340
PLUMBING PLUS EZIPEX Crimp (AUS)	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
	K1/50		572625

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
PLUMBING PLUS EZIPEX Gas (AUS)	K16/P18*		572600	
	K/20*		572605	
	K/25*		572610	
	K32		572615	
	K1/40		572620	
	K1/50		572625	
	PLUMBING PLUS EZIPRESS Gas (AUS)	VAU 15 (OD 12,7 mm)		572687
		VAU 20 (OD 19,1 mm)		572689
		VAU 25 (OD 25,4 mm)		572691
		VAU 32 (OD 31,8 mm)		572693
VAU 40 (OD 38,1 mm)			572695	
VAU 50 (OD 50,8 mm)			572697	
VAUFz 65 (PR-3B) (OD 63,5 mm)		Z5	572839	
VAUFz 80 (PR-3B) (OD 76,2 mm)		Z5	572840	
PLUMBING PLUS EZIPRESS Solar (AUS)	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804	
	VAU 20 S (PR-2B) (OD 19,1 mm)	Z8	574806	
	VAU 25 S (PR-2B) (OD 25,4 mm)	Z8	574808	
	VAU 15 (OD 12,7 mm)		572687	
	VAU 20 (OD 19,1 mm)		572689	
	VAU 25 (OD 25,4 mm)		572691	
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804	
	VAU 20 S (PR-2B) (OD 19,1 mm)	Z8	574806	
PLUMBING PLUS EZIPRESS Water (AUS)	VAU 15 (OD 12,7 mm)		572687	
	VAU 20 (OD 19,1 mm)		572689	
	VAU 25 (OD 25,4 mm)		572691	
	VAU 32 (OD 31,8 mm)		572693	
	VAU 40 (OD 38,1 mm)		572695	
	VAU 50 (OD 50,8 mm)		572697	
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839	
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840	
POLYPIPE POLYSURE	TH 10*		570467	
	TH 15*		570457	
	TH 22*		570472	
	TH 28		570477	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
POLYSAN Handelsoges. m.b.H. & Co KG (Krems/Öster- reich)	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
POLYSAN Handelsoges. m.b.H. & Co KG (Krems/Öster- reich)	M 35 S (PR-2B)	Z8	574746	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S) ¹⁾	Z7 XL 45 kN ⁴⁾	579110	
POLYSAN Edelstahl Press-System 1.4520	M 108,0 G XL (PR-3S) ²⁾	Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
POLYSAN- Edelstahl Press-System Gas	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S) ¹⁾	Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S) ²⁾	Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
POLYSAN Handelsoges. m.b.H. & Co KG (Krems/Öster- reich)	M 35 S (PR-2B)	Z8	574746	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
POLYSAN- Edelstahl Press-System Wasser	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	M 15		570110	
	M 18		570120	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.		
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	TH 14*		570455		
	TH 16*		570460		
	TH 17*		570462		
	TH 18*		570465		
	TH 20*		570470		
	POLYSAN- Press-System	TH 26*		570475	
		TH 32		570480	
		TH 40		570485	
		TH 50 (PZ-S)		572400	
		TH 63 (PZ-S)		572405	
		THz 75 (PR-3B)	Z4	572829	
		TH 16 S (PR-2B)	Z8	574782	
		TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794		
TH 32 S (PR-2B)	Z8	574798			
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	TH 14*		570455		
	TH 16*		570460		
	TH 17*		570462		
	TH 18*		570465		
	TH 20*		570470		
	POLYSAN-Henco- Press-System	TH 26*		570475	
		HE 32		571900	
		HEz 40		571904	
		TH 16 S (PR-2B)	Z8	574782	
		TH 20 S (PR-2B)	Z8	574788	
		TH 26 S (PR-2B)	Z8	574794	
		POLYSAN (España) „Rainbow“	U 16*		570765
			U 18*		570770
	U 20*			570775	
U 25*			570780		
U 32			570785		
U 40			570790		
U 50			570795		
U 63 (PR-3B)	Z4		572837		
U 63 (PZ-S)		572365			
Prandelli Multyrama Pf	H 14*		570310		
	H 16*		570320		
	H 18*		570340		
	H 20*		570350		
	H 26*		570370		
	H 32		570380		
	U 40		570790		
	U 50		570795		
U 63 (PR-3B)	Z4	572837			
Prandelli Multyrama Pfm	H 16*		570320		
	H 18*		570340		
	H 20*		570350		
	H 26*		570370		
	H 32		570380		
	TH 16*		570460		
	TH 18*		570465		
	TH 20*		570470		
	TH 26*		570475		
	TH 32		570480		
	TH 40		570485		
	TH 50 (PZ-S)		572400		
	TH 16 S (PR-2B)	Z8	574782		
	TH 20 S (PR-2B)	Z8	574788		
	TH 26 S (PR-2B)	Z8	574794		
	TH 32 S (PR-2B)	Z8	574798		
	U 16*		570765		
	U 18*		570770		
	U 20*		570775		
	U 40		570790		
	U 50		570795		
	U 63 (PR-3B)	Z4	572837		

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
PURMO Cleverfit Radial	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	
U 16*		570765	
U 20*		570775	
U 32		570785	
VP 16*		570910	
VP 20*		570915	
VP 25		570920	

R

Raccorderie Metalliche aesPRES ¹⁾	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
Raccorderie Metalliche inoxPRES ¹⁾	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111
Raccorderie Metalliche MARINEPRES ¹⁾	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579111

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure \leq PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Raccorderie Metalliche steelPRES ¹	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S) ⁽¹⁾	Z7 XL 45 kN ⁽¹⁾	579101	
	M 88,9 G XL (PR-3S) ⁽¹⁾	Z7 XL 45 kN ⁽¹⁾	579110	
	M 108,0 G XL (PR-3S) ⁽¹⁾	Z7 XL 45 kN ⁽¹⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	RBM Tita-fix	B 14*		570845
		B 16*		570850
B 18*			570855	
B 20*			570860	
B 26			570870	
F 16*			570717	
F 18*			570720	
F 20*			570727	
F 16 S (PR-2B)		Z8	574728	
F 20 S (PR-2B)		Z8	574730	
H 14*			570310	
H 16*			570320	
H 18*			570340	
H 20*			570350	
H 26*			570370	
H 32			570380	
TH 14*			570455	
TH 16*			570460	
TH 18*			570465	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 50 (PZ-S)			572400	
TH 63 (PZ-S)			572405	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
U 14*			570760	
U 16*			570765	
U 18*			570770	
U 20*			570775	
RBM Tita-gas		TH 16*		570460
		TH 20*		570470
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	
	Redi Nicoll Fluxo	TH 14*		570455
		TH 16*		570460
TH 18*			570465	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 50 (PZ-S)			572400	
TH 63 (PZ-S)			572405	
THz 75 (PR-3B)			572829	
TH 16 S (PR-2B)		Z8	574782	
TH 20 S (PR-2B)		Z8	574788	
TH 26 S (PR-2B)		Z8	574794	
TH 32 S (PR-2B)		Z8	574798	
Redi Nicoll Fluxo Gas	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
RIFENG U PRESS FITTING (F5)	U 14*		570760	
	U 16*		570765	
	U 18*		570770	
	U 20*		570775	
	U 25*		570780	
	U 32		570785	
	U 40		570790	
	U 50		570795	
	U 63 (PZ-S)		572365	
	U 63 (PR-3B)	Z4	572837	
	U 75 (PR-3B)	Z4	572828	
RIFENG TH PRESS FITTING (F9)	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
TH 63 (PZ-S)		572405		
RIQUIER A SERTIR	Rfz 12*		571320	
	Rfz 16*		571325	
	Rfz 20*		571330	
	Rfz 25		571335	
	Roth PressCheck	RN 14*		572672
RN 16			572670	
RN 17*			572674	
RN 20*			572676	
RN 25/26			572678	
RN 32			572680	
RN 40 (PR-3S)		Z2	572714	
RN 50 (PR-3S)		Z2	572716	
RNz 63 (PR-3B)		Z4	572836	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Rubinetteria Bresciane Bonomi TURBO CuNi	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽¹⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽¹⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽¹⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	Rubinetteria Bresciane Bonomi TURBO INOX	M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
		M 35		570150
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽¹⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽¹⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽¹⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		
Rubinetteria Bresciane Bonomi TURBO INOX GAS	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	Rubinetteria Bresciane Bonomi TURBO STEEL	M 15		570110
M 18			570120	
M 22			570130	
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
Rubinetteria Bresciane Bonomi TURBO PRESS		B 14*		570845
	B 16*		570850	
	B 18*		570855	
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	H 14*		570310	
	H 16*		570320	
	H 18*		570340	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	TH 14*		570455	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
TH 16 S (PR-2B)	Z8	574782		
TH 20 S (PR-2B)	Z8	574788		
TH 26 S (PR-2B)	Z8	574794		
TH 32 S (PR-2B)	Z8	574798		
U 14*		570760		
U 16*		570765		
U 18*		570770		
U 20*		570775		
C 26*		570750		
U 32		570785		
Rubinetteria Bresciane Bonomi TURBO PRESS GAS	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788		
TH 26 S (PR-2B)	Z8	574794		
TH 32 S (PR-2B)	Z8	574798		
Sa.MI plastic	TH 14*		570455	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
	TH 26 S (PR-2B)	Z8	574794	
	TH 32 S (PR-2B)	Z8	574798	

S

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Sa, MI plastic Multistrato Gas	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	28	574782	
	TH 20 S (PR-2B)	28	574788	
	TH 26 S (PR-2B)	28	574794	
	TH 32 S (PR-2B)	28	574798	
	SANHA 3fit-Press Pb-free Serie 25000	B 16*		570850
		B 20*		570860
B 26			570870	
B 32			570880	
F 16*			570717	
F 20*			570727	
F 26*			570730	
F 32			570735	
Fz 40			570742	
Fz 50			570747	
F 63 (PZ-S)			572385	
F 16 S (PR-2B)		28	574728	
F 20 S (PR-2B)		28	574730	
F 26 S (PR-2B)		28	574732	
F 32 S (PR-2B)		28	574734	
H 16*			570320	
H 20*			570350	
H 26*			570370	
H 32			570380	
H 40 (PZ-4G)			570390	
TH 16*			570460	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
TH 40			570485	
TH 50 (PZ-S)			572400	
TH 63 (PZ-S)			572405	
TH 16 S (PR-2B)		28	574782	
TH 20 S (PR-2B)		28	574788	
TH 26 S (PR-2B)		28	574794	
TH 32 S (PR-2B)		28	574798	
U 16*			570765	
U 20*			570775	
C 26*			570750	
U 32			570785	
U 40			570790	
U 50			570795	
U 63 (PR-3B)		24	572837	
U 63 (PZ-S)			572365	
SANHA 3fit-Press PPSU Serie 35000		B 16*		570850
	B 20*		570860	
	B 26		570870	
	B 32		570880	
	F 16*		570717	
	F 20*		570727	
	F 26*		570730	
	F 32		570735	
	F 16 S (PR-2B)	28	574728	
	F 20 S (PR-2B)	28	574730	
	F 26 S (PR-2B)	28	574732	
	F 32 S (PR-2B)	28	574734	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	28	574782	
	TH 20 S (PR-2B)	28	574788	
	TH 26 S (PR-2B)	28	574794	
	TH 32 S (PR-2B)	28	574798	
	U 16*		570765	
	U 20*		570775	
	C 26*		570750	
	U 32		570785	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
SANHA Heavy Steel Press	VMP 1/2" (OD 21,3 mm)		571762	
	VMPz 3/4" (OD 26,9 mm)		571764	
	VMPz 1" (OD 33,7 mm)		571767	
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413	
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	25	572844	
SANHA Heavy Steel Press Gas ¹⁾	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845	
	VMP 1/2" (OD 21,3 mm)		571762	
	VMPz 3/4" (OD 26,9 mm)		571764	
	VMPz 1" (OD 33,7 mm)		571767	
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413	
SANHA-NiroSan Gas Presssystem Serie 17000	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	25	572844	
	VMPz 2" (PR-3B) (OD 60,3 mm)	25	572845	
	SA 15		570935	
	SA 18		570940	
	SA 22		570945	
SANHA-NiroSan Industry Presssystem Serie 18000	SA 28		570950	
	SA 35		570955	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	22	572706	
	M 54 (PR-3S)	22	572708	
	M 76,1 XL (PR-3S)	27 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S) ⁷⁾	27 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S) ⁷⁾	27 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	28	574738	
	M 18 S (PR-2B)	28	574740	
	M 22 S (PR-2B)	28	574742	
	M 28 S (PR-2B)	28	574744	
	M 35 S (PR-2B)	28	574746	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	22	572850	
	V 54		570175	
	V 54 (PR-2B)	22	572851	
	V 15 S (PR-2B)	28	574752	
	V 18 S (PR-2B)	28	574756	
	V 22 S (PR-2B)	28	574758	
	V 28 S (PR-2B)	28	574760	
	V 35 S (PR-2B)	28	574762	
	SANHA-NiroSan Industry Presssystem Serie 18000	SA 15		570935
		SA 18		570940
		SA 22		570945
		SA 28		570950
SA 35			570955	
M 15			570110	
M 18			570120	
M 22			570130	
M 28			570140	
M 35			570150	
M 42 (PR-3S)		22	572706	
M 54 (PR-3S)		22	572708	
XP 64,0 XL (PR-3S)		26 XL ³⁾ / 27 XL 45 kN ⁴⁾	579100	
M 76,1 XL (PR-3S)		26 XL ³⁾ / 27 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		26 XL ³⁾ / 27 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		26 XL ³⁾ / 27 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		28	574738	
M 18 S (PR-2B)		28	574740	
M 22 S (PR-2B)		28	574742	
M 28 S (PR-2B)		28	574744	
M 35 S (PR-2B)		28	574746	
V 15			570115	
V 18			570125	
V 22			570135	
V 28			570145	
V 35			570155	
V 42			570165	
V 42 (PR-2B)		22	572850	
V 54			570175	
V 54 (PR-2B)		22	572851	
V 15 S (PR-2B)		28	574752	
V 18 S (PR-2B)		28	574756	
V 22 S (PR-2B)		28	574758	
V 28 S (PR-2B)		28	574760	
V 35 S (PR-2B)		28	574762	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
SANHA-NiroSan- Presssystem Serie 9000	SA 15		570935	
	SA 18		570940	
	SA 22		570945	
	SA 28		570950	
	SA 35		570955	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)	SA 15		570935
		SA 18		570940
		SA 22		570945
SA 28			570950	
SA 35			570955	
M 15			570110	
M 18			570120	
M 22			570130	
M 28			570140	
M 35			570150	
M 42 (PR-3S)		Z2	572706	
M 54 (PR-3S)		Z2	572708	
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
M 35 S (PR-2B)		Z8	574746	
V 15			570115	
V 18			570125	
V 22			570135	
V 28			570145	
V 35			570155	
V 42			570165	
V 42 (PR-2B)		Z2	572850	
V 54			570175	
V 54 (PR-2B)		Z2	572851	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
V 28 S (PR-2B)		Z8	574760	
V 35 S (PR-2B)		Z8	574762	
SANHA NiroTherm Serie 91000		SA 15		570935
		SA 18		570940
		SA 22		570945
		SA 28		570950
	SA 35		570955	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
SANHA NiroTherm Industry Serie 98000	SA 15		570935	
	SA 18		570940	
	SA 22		570945	
	SA 28		570950	
	SA 35		570955	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	SANHA-Press Chrom Serie 16000	SA 12		570930
		SA 15		570935
		SA 18		570940
		SA 22		570945
SA 28			570950	
M 12			570100	
M 15			570110	
M 18			570120	
M 22			570130	
M 28			570140	
M 12 S (PR-2B)		Z8	574736	
M 15 S (PR-2B)		Z8	574738	
M 18 S (PR-2B)		Z8	574740	
M 22 S (PR-2B)		Z8	574742	
M 28 S (PR-2B)		Z8	574744	
V 12			570107	
V 15			570115	
V 18			570125	
V 22			570135	
V 28			570145	
V 12 S (PR-2B)		Z8	574748	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
V 28 S (PR-2B)		Z8	574760	
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000		SA 12		570930
		SA 14		570932
		SA 15		570935
		SA 16		570937
		SA 18		570940
		SA 22		570945
		SA 28		570950
		SA 35		570955
		M 12		570100
		M 15		570110
		M 18		570120
		M 22		570130
		M 28		570140
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 12 S (PR-2B)	Z8	574736	
	M 15 S (PR-2B)	Z8	574738	
	M 18 S (PR-2B)	Z8	574740	
	M 22 S (PR-2B)	Z8	574742	
	M 28 S (PR-2B)	Z8	574744	
	M 35 S (PR-2B)	Z8	574746	
	V 12		570107	
	V 14		570112	
	VG 14		570132	
	V 15		570115	
	V 16		570117	
	VG 16		570137	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	V 12 S (PR-2B)	Z8	574748	
	VG 14 S (PR-2B)	Z8	574750	
V 15 S (PR-2B)	Z8	574752		
VG 16 S (PR-2B)	Z8	574754		
V 18 S (PR-2B)	Z8	574756		
V 22 S (PR-2B)	Z8	574758		
V 28 S (PR-2B)	Z8	574760		
V 35 S (PR-2B)	Z8	574762		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANHA-Press Pressfittings Serie 6000	SA 12		570930	SANHA PURAPRESS Serie 8000	SA 12		570930
	SA 14		570932		SA 14		570932
	SA 15		570935		SA 15		570935
	SA 16		570937		SA 16		570937
	SA 18		570940		SA 18		570940
	SA 22		570945		SA 22		570945
	SA 28		570950		SA 28		570950
	SA 35		570955		SA 35		570955
	M 12		570100		M 12		570100
	M 15		570110		M 15 ¹⁾		570110
	M 18		570120		M 18 ¹⁾		570120
	M 22		570130		M 22 ¹⁾		570130
	M 28		570140		M 28 ¹⁾		570140
	M 35		570150		M 35 ¹⁾		570150
	M 42 (PR-3S)		572706		M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708		M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579100		XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579108		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579108
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579107		M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111
	M 12 S (PR-2B)	Z8	574736		M 12 S (PR-2B)	Z8	574736
	M 15 S (PR-2B)	Z8	574738		M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740		M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742		M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744		M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746		M 35 S (PR-2B)	Z8	574746
	V 12		570107		V 12		570107
	V 14		570112		V 14		570112
	VG 14		570132		VG 14		570132
	V 15		570115		V 15		570115
	V 16		570117		V 16		570117
	VG 16		570137		VG 16		570137
	V 18		570125		V 18		570125
	V 22		570135		V 22		570135
	V 28		570145		V 28		570145
	V 35		570155		V 35		570155
	V 42		570165		V 42		570165
	V 42 (PR-2B)	Z2	572850		V 42 (PR-2B)	Z2	572850
	V 54		570175		V 54		570175
	V 54 (PR-2B)	Z2	572851		V 54 (PR-2B)	Z2	572851
	V 12 S (PR-2B)	Z8	574748		V 12 S (PR-2B)	Z8	574748
VG 14 S (PR-2B)	Z8	574750	VG 14 S (PR-2B)	Z8	574750		
V 15 S (PR-2B)	Z8	574752	V 15 S (PR-2B)	Z8	574752		
VG 16 S (PR-2B)	Z8	574754	VG 16 S (PR-2B)	Z8	574754		
V 18 S (PR-2B)	Z8	574756	V 18 S (PR-2B)	Z8	574756		
V 22 S (PR-2B)	Z8	574758	V 22 S (PR-2B)	Z8	574758		
V 28 S (PR-2B)	Z8	574760	V 28 S (PR-2B)	Z8	574760		
V 35 S (PR-2B)	Z8	574762	V 35 S (PR-2B)	Z8	574762		
SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		570930	SANHA-Therm Serie 24000	SA 12		570930
	SA 15		570935		SA 15		570935
	SA 18		570940		SA 18		570940
	SA 22		570945		SA 22		570945
	SA 28		570950		SA 28		570950
	SA 35		570955		SA 35		570955
	M 12		570100		M 12		570100
	M 15		570110		M 15		570110
	M 18		570120		M 18		570120
	M 22		570130		M 22		570130
	M 28		570140		M 28		570140
	M 35		570150		M 35		570150
	M 42 (PR-3S)	Z2	572706		M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708		M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579100		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579108
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579108		M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579107
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579107		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579101		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579110		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45kN ⁴⁾	579111		M 12 S (PR-2B)	Z8	574736
	M 12 S (PR-2B)	Z8	574736		M 15 S (PR-2B)	Z8	574738
	M 15 S (PR-2B)	Z8	574738		M 18 S (PR-2B)	Z8	574740
	M 18 S (PR-2B)	Z8	574740		M 22 S (PR-2B)	Z8	574742
	M 22 S (PR-2B)	Z8	574742		M 28 S (PR-2B)	Z8	574744
	M 28 S (PR-2B)	Z8	574744		M 35 S (PR-2B)	Z8	574746
	M 35 S (PR-2B)	Z8	574746		V 12		570107
	V 12		570107		V 15		570115
	V 15		570115		V 18		570125
	V 18		570125		V 22		570135
	V 22		570135		V 28		570145
	V 28		570145		V 35		570155
	V 35		570155		V 42		570165
	V 42		570165		V 42 (PR-2B)	Z2	572850
	V 42 (PR-2B)	Z2	572850		V 54		570175
	V 54		570175		V 54 (PR-2B)	Z2	572851
	V 54 (PR-2B)	Z2	572851		V 12 S (PR-2B)	Z8	574748
	V 12 S (PR-2B)	Z8	574748		V 15 S (PR-2B)	Z8	574752
	V 15 S (PR-2B)	Z8	574752		V 18 S (PR-2B)	Z8	574756
	V 18 S (PR-2B)	Z8	574756		V 22 S (PR-2B)	Z8	574758
	V 22 S (PR-2B)	Z8	574758		V 28 S (PR-2B)	Z8	574760
	V 28 S (PR-2B)	Z8	574760		V 35 S (PR-2B)	Z8	574762
	V 35 S (PR-2B)	Z8	574762				

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
SANHA-Therm Industry Serie 28000	SA 12		570930	
	SA 15		570935	
	SA 18		570940	
	SA 22		570945	
	SA 28		570950	
	SA 35		570955	
	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2		572706
	M 54 (PR-3S)	Z2		572708
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579108
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579107
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579111
	M 12 S (PR-2B)	Z8		574736
	M 15 S (PR-2B)	Z8		574738
	M 18 S (PR-2B)	Z8		574740
	M 22 S (PR-2B)	Z8		574742
	M 28 S (PR-2B)	Z8		574744
	M 35 S (PR-2B)	Z8		574746
	V 12			570107
	V 15			570115
	V 18			570125
	V 22			570135
	V 28			570145
	V 35			570155
	V 42			570165
	V 42 (PR-2B)	Z2		572850
	V 54			570175
	V 54 (PR-2B)	Z2		572851
	V 12 S (PR-2B)	Z8		574748
	V 15 S (PR-2B)	Z8		574752
	V 18 S (PR-2B)	Z8		574756
	V 22 S (PR-2B)	Z8		574758
	V 28 S (PR-2B)	Z8		574760
	V 35 S (PR-2B)	Z8		574762
	SANITOP PERMATUBO INOX	M 15		570110
		M 18 ¹⁾		570120
		M 22		570130
		M 28 ¹⁾		570140
		M 35		570150
		M 35 (PR-3S)	Z2	
M 42 (PZ-4G)				570160
M 54 (PZ-4G)				570170
M 42 (PR-3S)		Z2		572706
M 54 (PR-3S)		Z2		572708
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579101
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579110
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579111
M 15 S (PR-2B)		Z8		574738
M 18 S (PR-2B)		Z8		574740
M 22 S (PR-2B)	Z8		574742	
M 28 S (PR-2B)	Z8		574744	
M 35 S (PR-2B)	Z8		574746	
SANPRO THPRESS	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 16 S (PR-2B)	Z8		574782
	TH 20 S (PR-2B)	Z8		574788
	TH 26 S (PR-2B)	Z8		574794
	TH 32 S (PR-2B)	Z8		574798
	SATEC SK VITerm	TH 16*		570460
TH 18*			570465	
TH 20*			570470	
TH 26*			570475	
TH 32			570480	
U 40			570790	
U 50			570795	
U 63 (PZ-S)			572365	
SAVEUR REFLEX PEX Water	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 32		570480	
SAVEUR REFLEX PEX-AL-PEX Gas	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 32		570480	
Schütz duo-flex tri-o-flex	TH 14*		570455	
	TH 16*		570460	
	TH 17*		570462	
	TH 20*		570470	
	TH 25*		570495	
	TH 16 S (PR-2B)	Z8		574782
TH 20 S (PR-2B)	Z8		574788	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Schwer Fittings AQUApress	M 12		570100	
	M 15		570110	
	M 18		570120	
	M 22		570130	
	M 28		570140	
	M 35		570150	
	M 42 (PZ-4G)		570160	
	M 54 (PZ-4G)		570170	
	M 42 (PR-3S)	Z2		572706
	M 54 (PR-3S)	Z2		572708
	M 12 S (PR-2B)	Z8		574736
	M 15 S (PR-2B)	Z8		574738
	M 18 S (PR-2B)	Z8		574740
	M 22 S (PR-2B)	Z8		574742
	M 28 S (PR-2B)	Z8		574744
	M 35 S (PR-2B)	Z8		574746
	Seppelfricke VSH SudoPress C-Stahl Visu-Control	V 12		570107
		V 15		570115
		V 18		570125
		V 22		570135
		V 28		570145
		V 35		570155
		V 42		570165
V 54			570175	
V 12 S (PR-2B)		Z8		574748
V 15 S (PR-2B)		Z8		574752
V 18 S (PR-2B)		Z8		574756
V 22 S (PR-2B)		Z8		574758
V 28 S (PR-2B)		Z8		574760
V 35 S (PR-2B)		Z8		574762
Seppelfricke VSH SudoPress Edelstahl Visu-Control		V 12		570107
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 54		570175	
	V 12 S (PR-2B)	Z8		574748
	V 15 S (PR-2B)	Z8		574752
	V 18 S (PR-2B)	Z8		574756
	V 22 S (PR-2B)	Z8		574758
	V 28 S (PR-2B)	Z8		574760
	V 35 S (PR-2B)	Z8		574762
	Seppelfricke VSH SudoPress Kupfer Visu-Control	V 12		570107
V 15			570115	
V 18			570125	
V 22			570135	
V 28			570145	
V 35			570155	
V 42			570165	
V 54			570175	
V 12 S (PR-2B)		Z8		574748
V 15 S (PR-2B)		Z8		574752
V 18 S (PR-2B)		Z8		574756
V 22 S (PR-2B)		Z8		574758
V 28 S (PR-2B)		Z8		574760
V 35 S (PR-2B)		Z8		574762
Seppelfricke VSH SudoPress Kupfer Gas Visu-Control		V 15		570115
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 54		570175	
	V 12 S (PR-2B)	Z8		574748
Seppelfricke VSH XPress C-Stahl	M 12		570100	
	M 15		570110	
	M 18 ¹⁾		570120	
	M 22		570130	
	M 28 ¹⁾		570140	
Seppelfricke VSH XPress C-Stahl	M 35		570150	
	M 42 (PZ-4G)		570160	
	M 54 (PZ-4G)		570170	
	M 42 (PR-3S)	Z2		572706
	M 54 (PR-3S)	Z2		572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾		579101
	M 12 S (PR-2B)	Z8		574736
	M 15 S (PR-2B)	Z8		574738
	M 18 S (PR-2B)	Z8		574740
	M 22 S (PR-2B)	Z8		574742
	M 28 S (PR-2B)	Z8		574744
	M 35 S (PR-2B)	Z8		574746

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Seppelfricke VSH XPress Edelstahl	M 15		570110
	M 18 ⁹⁾		570120
	M 22		570130
	M 28 ⁹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
Seppelfricke VSH XPress Edelstahl Gas	M 15		570110
	M 18 ⁹⁾		570120
	M 22		570130
	M 28 ⁹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
Seppelfricke VSH XPress Kupfer	M 12		570100
	M 15		570110
	M 18 ⁹⁾		570120
	M 22		570130
	M 28 ⁹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109
	M 12 S (PR-2B)	Z8	574736
M 15 S (PR-2B)	Z8	574738	
M 18 S (PR-2B)	Z8	574740	
M 22 S (PR-2B)	Z8	574742	
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
Seppelfricke VSH XPress Kupfer Gas	M 15		570110
	M 18 ⁹⁾		570120
	M 22		570130
	M 28 ⁹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
M 54 (PR-3S)	Z2	572708	
SESTA SESTA GAS	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
SESTA Sistema multistrato	H 16*		570320
	H 20*		570350
	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
SIGMA LI Premium	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
SLOVARM PEX-THERM	U 16*		570765	
	U 20*		570775	
	H 26*		570370	
	U 32		570785	
	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	H 32		570380	
	STANDARD HIDRAULICA MultiStandard	H 16*		570320
		H 20*		570350
		H 25*		570360
H 32			570380	
RFz 16*			571325	
RFz 20*			571330	
RFz 25			571335	
RFz 32			571340	
TH 16*			570460	
TH 20*			570470	
TH 25*			570495	
TH 32		570480		
TH 16 S (PR-2B)	Z8	574782		
TH 20 S (PR-2B)	Z8	574788		
TH 32 S (PR-2B)	Z8	574798		
U 16*		570765		
U 18*		570770		
U 20*		570775		
U 25*		570780		
U 32		570785		
U 40		570790		
U 50		570795		
U 63 (PR-3B)	Z4	572837		
U 63 (PZ-S)		572365		
steeltrade Presssystem Edelstahl Kontur M	M 15		570110	
	M 18 ⁹⁾		570120	
	M 22		570130	
	M 28 ⁹⁾		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 S (PR-2B)	Z8	574738	
M 18 S (PR-2B)	Z8	574740		
M 22 S (PR-2B)	Z8	574742		
M 28 S (PR-2B)	Z8	574744		
M 35 S (PR-2B)	Z8	574746		
STELBI Polikraft	H 16*		570320	
	H 20*		570350	
	H 26*		570370	
	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	TH 16 S (PR-2B)	Z8	574782	
TH 20 S (PR-2B)	Z8	574788		
TH 26 S (PR-2B)	Z8	574794		
TH 32 S (PR-2B)	Z8	574798		
U 16*		570765		
U 20*		570775		
STELBI Stelgas	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 16 S (PR-2B)	Z8	574782	
	TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794		

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure \leq PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
STH Westco COPPER PRESS	M 15		570110
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

T

TDM BRASS Serie 1600	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	THL 32		570487
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	U 16*		570765
	U 18*		570770
U 20*		570775	
U 25*		570780	
C 26*		570750	
U 32		570785	

TDM BRASS Serie 2600	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	THL 32		570487
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	U 16*		570765
	U 18*		570770
	U 20*		570775
U 25*		570780	
C 26*		570750	
U 32		570785	

TDM BRASS Serie 1700 gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	THL 32		570487
	TH 16 S (PR-2B)	Z8	574782
TH 20 S (PR-2B)	Z8	574788	
TH 26 S (PR-2B)	Z8	574794	

TermaConcept TC-PRESS	Basic E01 ⁵⁾		571855
--------------------------	-------------------------	--	--------

THERMOLUTZ	H 14*		570310
	H 16*		570320
	TH 20*		570470
	TH 20 S (PR-2B)	Z8	574788

TE-SA TE-SA press serie 800	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798

THERMACOME ACOPEX ALU	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
U 32		570785	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
TIEMME AL-COBRAPEX Serie 1650	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	THL 32		570487
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794

TIEMME Serie 1700 PE-X a pressare	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340

TIEMME TIEMME Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	THL 32		570487
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
TH 26 S (PR-2B)	Z8	574794	

TIGRE ALPEX GÁS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480

TKM Systemtechnik	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405

TRA MULTITRAPRESS	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

TRA TRAPRESS	H 12*		570300
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340

Tradelink TradePex Crimp Water	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
K1/50		572625	

Tradelink TradePex Crimp Gas	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
	K1/50		572625

TUBIPLAST ITALY MULTILAYER PIPE	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
H 32		570380	
U 16*		570765	
U 18*		570770	
U 20*		570775	
C 26*		570750	
U 32		570785	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
TUBIPLAST ITALY MULTILAYER PIPE GAS SYSTEM	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
TH 32 S (PR-2B)	Z8	574798	
TWEETOP	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
U 75 (PR-3B)	Z4	572828	
U			
UNICAL AG MAX-MULTIPEX	U 16*		570765
	U 20*		570775
	H 26*		570370
	C 26*		570750
	U 32		570785
UNIDELTA DELTAPRESS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 16*		570765
U 20*		570775	
U 32		570785	
U 40		570790	
U 50		570795	
U 63 (PZ-S)		572365	
UNIDELTA DELTAPRESS GAS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
U 20*		570775	
U 32		570785	
Uponor MLC	UP 14*		572630
	UP 16*		572632
	UP 18*		572634
	UP 20*		572636
	UP 25		572638
	UP 32		572640
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828

System	Pressing tongs/ pressing rings	Driven by adapter tongs	Art.-No.
Uponor MLC-D	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
U 75 (PR-3B)	Z4	572828	
Uponor MLC-G ³⁾	UP 20 ²⁾		572636
	UP 25		572638
	UP 32		572640
Uponor S-Press PLUS	UP 16*		572632
	UP 20*		572636
	UP 25		572638
UP 32		572640	
Uponor Uni Pipe PLUS	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
V			
Valsir Bravopress	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 32 V		570685
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
U 20*		570775	
C 26*		570750	
U 32		570785	
Valsir PEXAL	H 14*		570310
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 32 V		570685
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
U 40		570790	
U 50		570795	
U 63 (PR-3B)	Z4	572837	
U 63 (PZ-S)		572365	
U 75 (PR-3B)	Z4	572828	

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- 2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC.
- 4) Driven by REMS Akku-Press XL 45 kN 22 V ACC.
- 5) For taking suitable pressing inserts.
- 6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- 7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- 8) For making press joints for operating pressure ≤ PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Van Marcke NV Tubipex	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	Van Marcke NV Tubipress	M 12	
M 15			570110
M 18			570120
M 22			570130
M 28			570140
M 35			570150
M 42 (PZ-4G)			570160
M 54 (PZ-4G)			570170
M 42 (PR-3S)		Z2	572706
M 54 (PR-3S)		Z2	572708
M 76,1 XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
M 88,9 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
M 108,0 G XL (PR-3S)		Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
M 12 S (PR-2B)		Z8	574736
M 15 S (PR-2B)		Z8	574738
M 18 S (PR-2B)		Z8	574740
M 22 S (PR-2B)		Z8	574742
M 28 S (PR-2B)	Z8	574744	
M 35 S (PR-2B)	Z8	574746	
Variotherm System TH	TH 11,6*		570482
	TH 16*		570460
	TH 20*		570470
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
VESBO CARBON	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
M 35 S (PR-2B)	Z8	574746	
VESBO INOX	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
M 35 S (PR-2B)	Z8	574746	
VESBO MULTIPRESS TH-U	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	C 26*		570750
U 32		570785	
VESBO VPREMIUM	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
Viega Fonterra	VX 12*		571630
	VP 14/15*		570905
	VP 16/17*		570910
	VP 20*		570915
	VP 25 ²⁾		570920
Viega MegaPress (ASTM) ¹⁰⁾	VMP 3/8" (OD 17,2 mm)		571760
	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Viega MegaPress 304 FKM (ASTM) ¹⁰⁾	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega MegaPress 316 (ASTM) ¹⁰⁾	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega MegaPress 316 FKM (ASTM) ¹⁰⁾	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega MegaPress CuNi (ASTM) ¹⁰⁾	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega MegaPress FKM (ASTM) ¹⁰⁾	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega Megapress (EN) ⁹⁾	VMP 3/8" (OD 17,2 mm)		571760
	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega Megapress S (EN) ⁹⁾	VMP 3/8" (OD 17,2 mm)		571760
	VMP 1/2" (OD 21,3 mm)		571762
	VMPz 3/4" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1 1/4" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1 1/2" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega Megapress S XL (EN) ⁹⁾	VMPz 2 1/2" XL (PR-3B) EN (OD 76,1 mm)	Z7 XL 45 kN ⁴⁾	579112
	VMPz 3" XL (PR-3B) (OD 88,9 mm)	Z7 XL 45 kN ⁴⁾	579113
	VMPz 4" XL (PR-3B) (OD 114,3 mm)	Z7 XL 45 kN ⁴⁾	579114
Viega Pexfit	VX 16*		571635
	VX 20*		571640
	VX 25*		571645
Viega Pexfit Fosta G	VX 16*		571635
	VX 20*		571640
	VX 25*		571645
Viega Prestabo	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B) ⁴⁾	Z5	572815
	Vfz 76,1 (PR-3B) ⁴⁾	Z5	572816
	Vfz 88,9 (PR-3B) ⁴⁾	Z5	572817
	Vfz 108,0 (PR-3B) ⁴⁾	Z5	572818
V 12 S (PR-2B)	Z8	574748	
V 15 S (PR-2B)	Z8	574752	
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
Viega Profifress	V 12		570107
	VG 14		570132
	V 15		570115
	VG 16		570137
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B) ⁴⁾	Z5	572815
	Vfz 66,7 (PR-3B)	Z5	572846
Vfz 76,1 (PR-3B) ⁴⁾	Z5	572816	
Vfz 88,9 (PR-3B) ⁴⁾	Z5	572817	
Vfz 108,0 (PR-3B) ⁴⁾	Z5	572818	
V 12 S (PR-2B)	Z8	574748	
VG 14 S (PR-2B)	Z8	574750	
V 15 S (PR-2B)	Z8	574752	
VG 16 S (PR-2B)	Z8	574754	
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
Viega Profipress G	V 12		570107	
	V 14		570132	
	V 15		570115	
	V 16		570137	
	V 18		570125	
	V 22		570135	
	V 28		570145	
	V 35		570155	
	V 42		570165	
	V 42 (PR-2B)	Z2	572850	
	V 54		570175	
	V 54 (PR-2B)	Z2	572851	
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815	
	V 12 S (PR-2B)	Z8	574748	
	V 14 S (PR-2B)	Z8	574750	
	V 15 S (PR-2B)	Z8	574752	
	V 16 S (PR-2B)	Z8	574754	
	V 18 S (PR-2B)	Z8	574756	
	V 22 S (PR-2B)	Z8	574758	
	V 28 S (PR-2B)	Z8	574760	
	V 35 S (PR-2B)	Z8	574762	
	Viega Profipress S	V 12		570107
		V 15		570115
V 18			570125	
V 22			570135	
V 28			570145	
V 35			570155	
V 12 S (PR-2B)		Z8	574748	
V 15 S (PR-2B)		Z8	574752	
V 18 S (PR-2B)		Z8	574756	
V 22 S (PR-2B)		Z8	574758	
V 28 S (PR-2B)		Z8	574760	
V 35 S (PR-2B)		Z8	574762	
Viega Profipress Therm		V 12		570107
	V 15		570115	
	V 18		570125	
	V 22		570135	
	V 12 S (PR-2B)	Z8	574748	
	V 15 S (PR-2B)	Z8	574752	
	V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758		
Viega ProPress (ASTM) ⁽¹⁰⁾	VUS 1/2" (OD 15,9 mm)		571770	
	VUS 3/4" (OD 22,2 mm)		571775	
	VUS 1" (OD 28,6 mm)		571780	
	VUS 1 1/4" (OD 34,9 mm)		571785	
	VUS 1 1/2" (OD 41,3 mm)		571790	
	VUS 2" (OD 54,0 mm)		571795	
	VUSFz 2 1/2" (PR-3B) (OD 66,7 mm)	Z5	572819	
XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820	
XL-C/XL-S	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821	
Viega ProPress 304 FKM (ASTM) ⁽¹⁰⁾	VUS 1/2" (OD 15,9 mm)		571770	
	VUS 3/4" (OD 22,2 mm)		571775	
	VUS 1" (OD 28,6 mm)		571780	
	VUS 1 1/4" (OD 34,9 mm)		571785	
	VUS 1 1/2" (OD 41,3 mm)		571790	
	VUS 2" (OD 54,0 mm)		571795	
	VUSFz 2 1/2" (PR-3B) (OD 66,7 mm)	Z5	572819	
XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820	
XL-C/XL-S	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821	
Viega ProPress 316 (ASTM) ⁽¹⁰⁾	VUS 1/2" (OD 15,9 mm)		571770	
	VUS 3/4" (OD 22,2 mm)		571775	
	VUS 1" (OD 28,6 mm)		571780	
	VUS 1 1/4" (OD 34,9 mm)		571785	
	VUS 1 1/2" (OD 41,3 mm)		571790	
	VUS 2" (OD 54,0 mm)		571795	
	VUSFz 2 1/2" (PR-3B) (OD 66,7 mm)	Z5	572819	
XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820	
XL-C/XL-S	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821	
Viega ProPress WATER System AUS	VAU 15 (OD 12,7 mm)		572687	
	VAU 20 (OD 19,1 mm)		572689	
	VAU 25 (OD 25,4 mm)		572691	
	VAU 32 (OD 31,8 mm)		572693	
	VAU 40 (OD 38,1 mm)		572695	
	VAU 50 (OD 50,8 mm)		572697	
	Viega ProPressG GAS System AUS	VAU 15 (OD 12,7 mm)		572687
VAU 20 (OD 19,1 mm)			572689	
VAU 25 (OD 25,4 mm)			572691	
VAU 32 (OD 31,8 mm)			572693	
VAU 40 (OD 38,1 mm)			572695	
VAU 50 (OD 50,8 mm)			572697	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Viega Raxinox	VRX 16		571750
	VRX 20		571752
Viega Raxofix	VRX 16		571750
	VRX 20		571752
	VRX 25		571754
	VRX 32		571756
	VRX 40		571758
	VRX 50		571760
	VRX 63		571797
Viega Sanfix ⁽²⁾	VP 16/17 ⁽²⁾		570910
	VP 20 ⁽²⁾		570915
	VP 25 ⁽²⁾		570920
	VP 32		570925
	VP 40 (PZ-4G)		570970
	VPz 50 (PZ-S)		572350
Viega Sanfix Fosta ⁽²⁾	VPz 63 (PZ-S)		572355
	VP 16/17 ⁽²⁾		570910
	VP 20 ⁽²⁾		570915
	VP 25 ⁽²⁾		570920
Viega Sanpress	VP 32		570925
	VP 40 (PZ-4G)		570970
	VPz 50 (PZ-S)		572350
	VPz 63 (PZ-S)		572355
	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
Viega Sanpress Inox	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VR 76,1 (PR-3B) ⁽⁴⁾	Z5	572822
	VR 88,9 (PR-3B) ⁽⁴⁾	Z5	572823
	VR 108,0 (PR-3B) ⁽⁴⁾	Z5	572824
	V 12 S (PR-2B)	Z8	574748
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
	V 15		570115
	V 18		570125
V 22		570135	
V 28		570145	
V 35		570155	
V 42		570165	
Viega Sanpress Inox G	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817
	Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
	V 15		570115
	V 18		570125
	V 22		570135
V 28		570145	
V 35		570155	
Viega Smartpress	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	Vfz 64,0 (PR-3B) ⁽⁴⁾	Z5	572815
	Vfz 76,1 (PR-3B) ⁽⁴⁾	Z5	572816
	Vfz 88,9 (PR-3B) ⁽⁴⁾	Z5	572817
Vfz 108,0 (PR-3B) ⁽⁴⁾	Z5	572818	
Viega Smartpress	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
Viega Smartpress	VX 16*		571635
	VX 20*		571640
	VX 25*		571645

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Viessmann	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
Vogel & Noot EASYTEC	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
VSH MultiPress	U 14*		570760
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
VSH MultiPress Gas ²⁾	U 16 ²⁾		570765
	U 20 ²⁾		570775
	U 25 ²⁾		570780
	TH 16 ²⁾		570460
	TH 20 ²⁾		570470
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	V 12		570107
	V 15		570115
	V 18		570125
V 22		570135	
V 28		570145	
V 35		570155	
V 42		570165	
V 54		570175	
XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108	
M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
V 12 S (PR-2B)	Z8	574748	
V 15 S (PR-2B)	Z8	574752	
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	
VSH SudoPress Carbon	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
VSH SudoPress Copper	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
VSH SudoPress Copper Gas	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
VSH SudoPress Stainless	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
VSH SudoPress	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
VSH SudoPress Gas ²⁾	U 16 ²⁾		570765
	U 20 ²⁾		570775
	U 25 ²⁾		570780
	TH 16 ²⁾		570460
	TH 20 ²⁾		570470
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	V 12		570107
	V 15		570115
	V 18		570125
V 22		570135	
V 28		570145	
V 35		570155	
V 42		570165	
V 54		570175	
XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108	
M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
V 12 S (PR-2B)	Z8	574748	
V 15 S (PR-2B)	Z8	574752	
V 18 S (PR-2B)	Z8	574756	
V 22 S (PR-2B)	Z8	574758	
V 28 S (PR-2B)	Z8	574760	
V 35 S (PR-2B)	Z8	574762	

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
VSH XPress Carbon	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-46)		570160
	M 54 (PZ-46)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
VSH XPress Copper	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
VSH XPress Copper GAS	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
VSH XPress Stainless	M 12		570100
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-46)		570160
	M 54 (PZ-46)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
VSH XPress Stainless Gas	M 12		570100
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
W			
Watts MTR Art press	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
WATTS RADIANT Watts WaterPEX	US 3/8**		571450
	US 1/2**		571455
	US 3/4**		571460
	US 1**		571465
	US 1 1/4"		571470
	US 1 1/2"		571475

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
WATTS	US ¾"		571450
RADIANT	US ½"		571455
Watts	US ¾"		571460
RadiantPEX	US 1"		571465
	US 1 ¼"		571470
	US 1 ½"		571475
WATTS	U 16 (½")		570765
RADIANT	U 20 (¾")		570775
Watts	U 25 (¾")		570780
RadiantPEX-AL	U 32 (1")		570785
Wavin	U 50		570795
Tigris K1/M1	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
Wavin	B 16*		570850
Tigris K5/M5	B 20*		570860
	B 32		570880
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	H 40 (PZ-4G)		570390
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
WEECON	M 15		570110
PRESS-C-Stahl	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746
WEECON	M 15		570110
PRESS-Edelstahl	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 S (PR-2B)	Z8	574738
	M 18 S (PR-2B)	Z8	574740
	M 22 S (PR-2B)	Z8	574742
	M 28 S (PR-2B)	Z8	574744
	M 35 S (PR-2B)	Z8	574746

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
WEECON	V 15		570115
PRESSS-Kupfer	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	V 15 S (PR-2B)	Z8	574752
	V 18 S (PR-2B)	Z8	574756
	V 22 S (PR-2B)	Z8	574758
	V 28 S (PR-2B)	Z8	574760
	V 35 S (PR-2B)	Z8	574762
WEM	U 16*		570765
WIELAND	TH 14 ²⁾		570455
cuprotherm	TH 16 ²⁾		570460
CTX ²⁾	TH 18 ²⁾		570465
	TH 20 ²⁾		570470
	TH 26 ²⁾		570475
WKS-Press	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
WÜRTH	TH 16*		570460
Würth	TH 20*		570470
	TH 26*		570475
	HE 32		571900
	HEz 40		571904
X			
XtraConnect	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 S (PR-2B)	Z8	574728
	F 20 S (PR-2B)	Z8	574730
	F 26 S (PR-2B)	Z8	574732
	F 32 S (PR-2B)	Z8	574734
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 16 S (PR-2B)	Z8	574782
	TH 20 S (PR-2B)	Z8	574788
	TH 26 S (PR-2B)	Z8	574794
	TH 32 S (PR-2B)	Z8	574798
	U 16*		570765
	U 20*		570775
(DN 26)	U 25*		570780
	U 32		570785
	VP 16*		570910
	VP 20*		570915
	VP 32		570925
Z			
ZEWOHERM	TH 12*		570452
Zewo Press Premium	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
ZEWOHERM	TH 16*		570460
Zewo Press PPSU	TH 20*		570470
	TH 26*		570475
	TH 32		570480
ZURN	US ¾"		571450
INDUSTRIES	US ½"		571455
ZURN PEX	US ¾"		571460
	US 1"		571465
	US 1 ¼"		571470
	US 1 ½"		571475
	US 2"		571477

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

⁸⁾ For making press joints for operating pressure ≤ PN 10.

⁹⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.

¹⁰⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.

The suitability of REMS pressing tools for pressfitting systems: Date 12.10.2022. For the updated situation regarding suitability status check our website:

www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 236 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

Accessories

For REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

Description	Art.-No.
Adapter tongs Z8 for driving REMS pressing rings S (PR-2B)	574702
Adapter tongs Z2 for driving REMS pressing rings M 35–54 (PR-3S), V 42–54 (PR-2B), RN 40–50 (PR-3S)	572795
Adapter tongs Z4 for driving REMS pressing rings F 75 (PR-3B), TH 63–75 (PR-3B), U 63–75 (PR-3B), RN 63 (PR-3B)	572801
Adapter tongs Z5 for driving REMS pressing rings VFz/VR 64–108 (PR-3B), VMPz 1½–2" (PR-3B), VUSFz 2½–4" (PR-3B), VAUFz 65–100 (PR-3B)	572802
Adapter tongs Z6 XL for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S) with REMS Power-Press XL ACC	579120
Adapter tongs Z7 XL 45 kN for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S), 2½–4" XL (PR-3B) with REMS Akku-Press XL 45 kN 22V ACC	579123
Steel case with insert for 6 pressing tongs (up to Ø 35 mm/1" and pressing tongs U 40, U 50, TH 40, F 40, F 50, G 40, VUS 1½")/cropping tongs and compartment for pipe cutter up to 42 mm	570295
Steel case with insert for 2 pressing tongs (M 42 (PZ-4G), M 54 (PZ-4G), V 42, V 54, H 40 A, VUS 1½", VUS 2")	570290
Steel case with insert for adapter tongs Z2 and pressing rings M 42 (PR-3S) and M 54 (PR-3S) or pressing rings SA 42 (PR-3S) and SA 54 (PR-3S).	572810
Steel case with insert for adapter tongs Z5 and 4 pressing rings VFz 64.0–108.0/VR 76.1–108.0/VUSFz 2½–4" (PR-3B) or for adapter tongs Z5 and 1 pressing tong VMPz 1½ (PZ-S) and 2 pressing rings VMPz 1½–2" (PR-3B)	572809
Steel case with insert for adapter tongs Mini Z8 and adapter tongs Z8 as well as 6 REMS pressing rings S (PR-2B)	574516
L-Boxx system case with inlay for Mini Z8 adapter tongs and Z8 adapter tongs as well as 14 REMS S pressing rings (PR-2B)	574704
L-Boxx system case with inserts for 8 pressing tongs (2B) and 6 pressing rings S (PR-2B)	571136
L-Boxx system case with inserts for 3 different pressing rings VMPz 2½–4" XL (PR-3B)	571137
XL-Boxx system case with inserts for 3 different pressing rings 64.0–108.0 XL (PR-3S) or 2½–4" XL (PR-3S)	579603
Steel case with inserts for adapter tongs Z2 and pressing rings V 42 (PR-2B) and V 54 (PR-2B)	572813



Confirmation of suitability

The suitability of crimping tools is determined basically by the manufacturer of crimping tools. Moreover the suitability of REMS crimping tools has been confirmed by the system manufacturer/supplier himself or approved through independent testing institutes.

Confirmation of suitability through the system manufacturer/supplier

More than 90 % of the manufacturers/suppliers of the pressfitting systems listed herein have tested REMS pressing tongs and confirmed the suitability for their pressfitting system.

Confirmation of suitability through independent testing institutes

The suitability of REMS pressing tongs for additional pressfitting systems have been confirmed through independent technical institutes:

TÜV-Certificates

Exist for Geberit Mepla, Geberit Mapress C-STAHl, Geberit Mapress EDELSTAHL, Geberit Mapress Kupfer, Nussbaum Cupress, Nussbaum Optipress, Uponor Unipipe, Viega-'profipress', Viega-'profipress G', Viega-'sanfix P', Viega-'sanpress', Viega-'Viegatherm P', Wavin Tigris. The TÜV-certificates confirm that REMS crimping tools are suitable for producing perfect and system-conformity pressing joints corresponding to these systems.

Suitability test according to DVGW W 534 (potable water)

Pressing joints produced with REMS pressing tools were tested by the state-operated material testing institute in Darmstadt/Germany or the material testing institute of the Land of North-Rhine-Westphalia, Germany according to DVGW work sheet W 534. These material testing institutes are certified by the DVGW for making these tests. A representative cross-section of press joints of pressfitting systems Geberit Mapress Edelstahl, Raccorderie Metalliche inoxPRES, Raccorderie Metalliche steelPRES, Uponor Unipipe, Viega Megapress, Viega Profipress and Viega Raxofix. was tested. The tests led to the result that all REMS pressing tools are suitable for producing perfect and system conformity pressing joints in accordance with these systems.

Suitability test according to DVGW G 5614/VP 625 or prEN 1254-7 (gas)

Pressing joints made with REMS pressing tools have been tested by the TÜV or by the Land Material Testing Institute Nordrhein-Westfalen or the DVGW Research Institute Karlsruhe according to DVGW Regulations G 5614/VP 625 or by the BSI (UK) according to prEN 1254-7. A representative cross-section of pressing joints of the pressfitting systems Geberit Mapress Edelstahl Gas, Geberit Mapress Kupfer Gas, Henco Gas, IBP >B<press Gas, Kembla KemPress Gas, Pegler Yorkshire X-Press Copper Gas, Raccorderie Metalliche inoxPRES Gas, Uponor MLC-G, Valsir PEXAL Gas, Viega Profipress G, Viega Pexfit G, Viega Sanpress INOX G, Viega PropressG GAS System (AUS) was tested. The tests led to the result that all REMS pressing tools are suitable for producing perfect and system conformity pressing joints in accordance with these systems.



potable water



gas

Hold-Harmless and Indemnification Agreement

REMS is the first system-independent machine and tool manufacturer to sign liability acceptance agreements for pressing tools.

A hold-harmless and indemnification agreement exists with the:

Zentralverband Sanitär Heizung Klima (Central Organization for the Sanitary-, Heating- and Climatization Industries),
Rathausallee 6, D-53757 St. Augustin,
referred to in the following as "ZVSHK",

Bundesindustrieverband Technische Gebäudeausrüstung e.V.,
Hinter Hoben 149, 53129 Bonn,
referred to in the following as "BTGA",

Verband Deutscher Kälte-Klima-Fachbetriebe e. V. (German Association for Coolant & Air-Conditioning Profession Industries),
Kaiser-Friedrich-Straße 7, D-53113 Bonn,
referred to in the following as "VDKF",

Schweizerisch-Liechtensteinischem Gebäudetechnikverband (Swiss-Liechtenstein Technical Building Association),
Auf der Mauer 11, CH-8023 Zürich,
referred to in the following as "suissetec",

The Zentralverband Sanitär Heizung Klima (ZVSHK), the Bundesindustrieverband Technische Gebäudeausrüstung e. V. (BTGA), the Verband Deutscher Kälte-Klima-Fachbetriebe e. V. (VDKF) and the Schweizerisch-Liechtensteinische Gebäudetechnikverband (suissetec) have made liability acceptance agreements in the interests of trade and industry with REMS GmbH & Co KG (REMS) for the radial pressing tools.

- Manual radial press REMS Eco-Press
- Cordless radial press REMS Mini-Press 14V ACC
- Cordless radial press REMS Mini-Press 22V ACC
- Cordless radial press REMS Mini-Press S 22V ACC
- Electric radial press REMS Power-Press SE
- Electro-hydraulic radial press REMS Power-Press
- Electro-hydraulic radial press REMS Power-Press ACC
- Electro-hydraulic radial press REMS Power-Press XL ACC
- Cordless radial press REMS Akku-Press 14V
- Cordless radial press REMS Akku-Press 14V ACC
- Cordless radial press REMS Akku-Press 22V ACC
- Cordless radial press REMS Akku-Press 22V ACC Connected
- Cordless radial press REMS Akku-Press XL 45 kN 22V ACC
- REMS pressing tongs
- REMS pressing rings
- REMS pressing tongs Mini

This makes REMS the first system-independent machine- and tool manufacturer to have concluded a hold-harmless and indemnification agreement for pressing tools. The conclusion of the agreement was effected on the basis of a successful cooperation established on partnership between REMS, the crafts, trades and industry and their organizations.

Eligible for services and performances from this agreement are all independent professional craftsmen, and companies of such, who are enrolled in the register of artisans and craftsmen (referred to in the following as "SHK-Establishments"), in as far as they have been members of the crafts guild of the sanitary- heating- and climatization enterprises competent for their business location at the time the damage event has arisen, and this crafts guild is associated with a regional guild association, which is a member of the ZVSHK.

Entitled to the services from the agreement with the BTGA are all building technology companies (hereinafter referred to as "TGA companies") insofar as they were a member of the Land Industry Association **Technical Building Equipment** responsible at the seat of their company at the time of the damage case and therefore an indirect member of the BTGA or direct member of the BTGA.


Eligible for services and performances from this agreement with the VDKF are all coolant systems companies or professional organisations (referred to as Coolant and Air-Conditioning Profession Industries) who, at the time the damage is caused, are members of the VDKF.

Eligible for services and performances from this agreement are all building systems companies (following TGA companies) who, at the time the damaged is caused, are members of suissetec.

In as far as the radial pressing tools mentioned show a defect with regard to construction, manufacture or material, or if the operator's manuals are faulty, thereby causing damage for the customer of the SHK-establishment, the Coolant and Air-Conditioning Profession Industries, or the TGA-companies, for which the SHK-establishment or the TGA-company is liable, then REMS shall be additionally liable - aside of the statutory prescriptions - for the consequences resulting from leakage, in accordance with the stipulations and provisions of this hold-harmless agreement.

The assumption of liability agreements apply regardless of which pressfitting system is pressed with the suitable REMS pressing tools. The current status regarding suitability of the REMS pressing tools for pressfitting systems can be viewed on the Internet: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

For more information please contact info@rems.de.

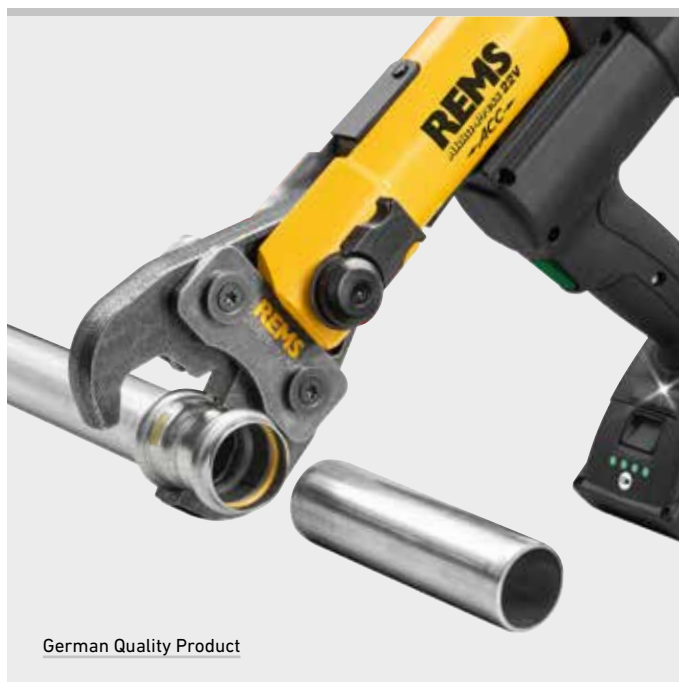

Reliable and safe: REMS was the first system-independent machine and tool manufacturer to sign liability acceptance agreements for pressing tools as early as the year 2000.



REMS cropping tongs

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

High performance cropping tongs in forged and specially hardened steel for cutting threaded rods.

Steel, stainless steel up to hardness classification 4.8 (400 N/mm²) M 6 – M 12

REMS cropping tongs – for cutting threaded rods.



Made of forged and specially hardened steel.

Reversible cropping inserts for double service life.

M cropping inserts with high precision thread contour machined on CNC machining centres for exact guiding of the threaded rod in the cutting process. Pliers parts, cropping inserts and specially machined and hardened cutting edges, made to fit exactly, for cutting without burr.

Threaded rod can be screwed into a threaded connection of the pipe clip or the nut without rework after cutting.

Cutting device in pliers design (**Patent EP 1 459 825, patent US 7,284,330**). Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force. All cropping tongs marked with * have an optional connection for manual drive through the radial press REMS Eco-Press.



Supply format

REMS cropping tongs. Cropping tongs with 1 pair of reversible cropping inserts for steel, stainless steel, M 6 – M 12. In a carton.

Description	for threaded rods	Art.-No.
REMS cropping tongs M 6*	M 6	571890
REMS cropping tongs M 8*	M 8	571895
REMS cropping tongs M 10	M 10	571865
REMS cropping tongs M 12	M 12	571870

German Quality Product



Patent EP 1 459 825
Patent US 7,284,330

Accessories

Description	for threaded rods	Art.-No.
Cropping inserts M 6 (pair)	M 6	571891
Cropping inserts M 8 (pair)	M 8	571896
Cropping inserts M 10 (pair)	M 10	571866
Cropping inserts M 12 (pair)	M 12	571871
Steel case with insert for 6 cropping tongs/pressing tongs and compartment for pipe cutter up to 42 mm		570295



REMS cable shear

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

High-grade cable shear in forged and specially hardened steel for cutting electric cable.

Electric cable ≤ 300 mm² (Ø 30 mm)

REMS cable shear – Easy cutting of electric cable.

Made of forged and specially hardened steel.

Replaceable cutting blades manufactured on CNC production centres ensure a precision blade geometry and long service life. Large cutting range.

Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.



German Quality Product



Supply format

REMS cable shear. Cable shears with 2 changeable cable cutters for electric cables ≤ 300 mm² (Ø 30 mm). In a carton.

Description	Art.-No.
Cable cutters (pack of 2)	571887



Accessories

Description	Art.-No.
Cable cutters (pack of 2)	571889

