

X-gas ball valves, reduced bore


110X series, X-series, welding / welding, EN (DIN), DN 10-50, reduced bore

Body	DN 10-50 Steel, P235GH (1.0345)
Ball	DN 10-50 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 10-50 PTFE+C
Stem	DN 10-50 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 10-50 FPM/NBR
Operation	DN 10-50 with composite handle




Operation conditions

-40 °C – +70 °C
 Over 70 °C contact manufacturer
 Below -30 °C contact manufacturer
 Lowest allowed ambient temperature -40 °C
 Leakage rate A (EN 12266-1)

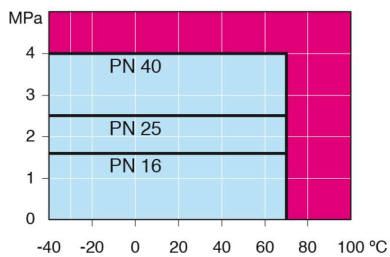

DN 10-50

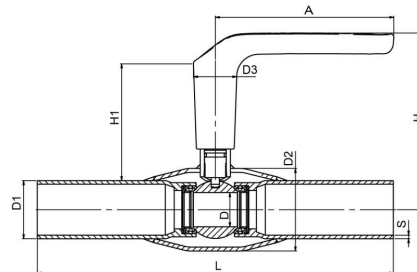

Not for steam

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	S	kg
10	40	110010X	130	10	17.2	33.7	32.0	119	86	230	2	0.6
15	40	110015X	130	10	21.3	33.7	32.0	119	86	230	2	0.6
20	40	110020X	130	15	26.9	42.4	32.0	123	87	230	2.3	0.9
25	40	110025X	130	20	33.7	48.3	32.0	125	86	230	2.6	0.9
32	40	110032X	130	25	42.4	60.3	32.0	129	85	260	2.6	1.4
40	40	110040X	130	32	48.3	70.0	32.0	133	87	260	2.6	1.5
50	40	110050X	130	40	60.3	76.1	32.0	140	88	300	2.9	2.1