



-  Clean water
-  Domestic use
-  Civil use
-  Industrial use

※ TURBO

Power, efficiency, and quiet performance.

※ ADVANCED HYDRAULIC REDESIGN

The new TURBO twin-impeller centrifugal pumps mark a significant step forward, thanks to an advanced hydraulic redesign optimized through state-of-the-art fluid dynamic simulations.

This innovative approach has led to a **flow rate increase of up to 40%** (+40 litres per minute), a 9-point boost in efficiency, and a **30% reduction in noise levels** all without raising energy consumption.

※ EFFICIENCY MEETS SUSTAINABILITY

An outstanding efficiency result that meets the demands of a market increasingly focused on energy savings and environmental sustainability.

※ DURABILITY AND USER COMFORT

Stainless steel impellers ensure greater durability and reliability, while the optimized geometry and refined hydraulics contribute to enhanced user comfort thanks to significantly reduced noise levels and overall quiet operation.

※ PERFORMANCE AND ENERGY SAVINGS

The ideal choice for those seeking higher performance with lower energy consumption all with a strong focus on sustainability.

PERFORMANCE RANGE

- Flow rate up to **200 l/min** (12 m³/h)
- Head up to **68 m**

INSTALLATION AND USE

Recommended for pumping clean water.

Their high efficiency and versatility make them ideal for a wide range of domestic, civil, and industrial applications particularly for water distribution using booster sets and storage tanks, mains pressure boosting, and irrigation systems.

ELECTRIC MOTOR

TURBO pumps are equipped with newly designed electric motors, engineered for inverter operation to ensure smooth and quiet performance. Efficiency class **IE3** for three-phase motors and **IE2** for single-phase versions. Class F insulation and IPX4 protection rating.

APPLICATION LIMITS

- Manometric suction head up to **7 m**
- Liquid temperature between from **-10 °C** and **+90 °C**
- Ambient temperature between **-10 °C** and **+40 °C**
- Maximum working pressure **10 bar**

AVAILABLE UPON REQUEST

- ※ Mechanical seal options available
- ※ Different voltage requirements 60 Hz frequency
- ※ IPX5 protection


PATENTS - TRADE MARKS - MODELS

- European Patent No.EP22187624.6
- Registered model in progress


CURVES AND PERFORMANCE DATA – HS=0 m

50 Hz

TURBO-4

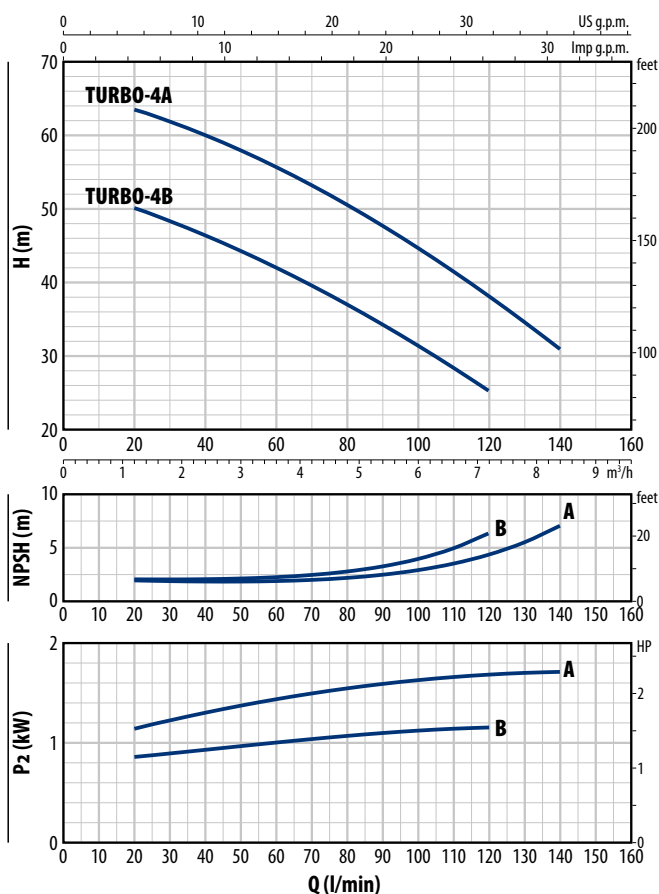

TURBO-6

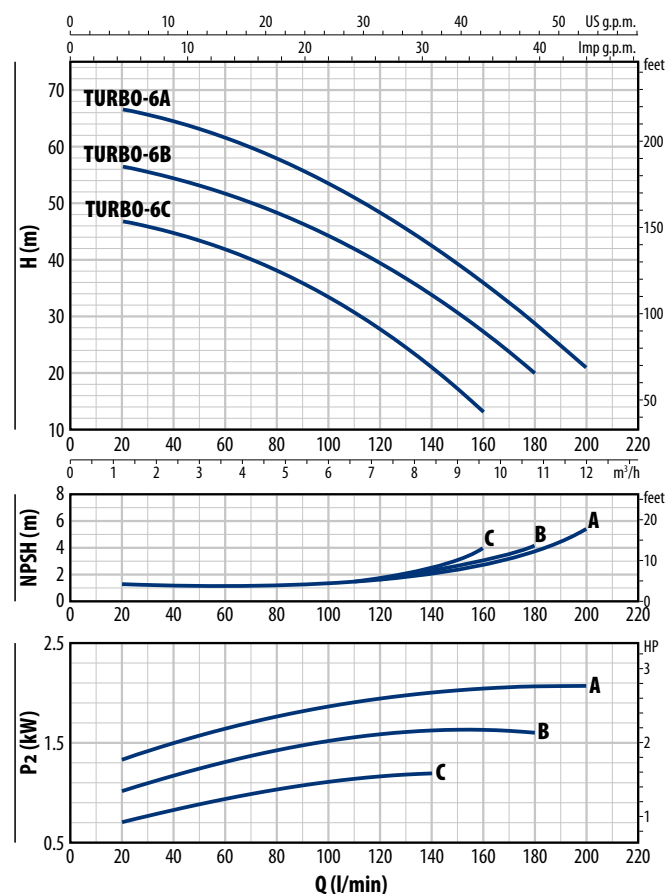

TURBO-4

TYPE		POWER (P ₂)		1~3~	Q										
Single-phase	Three-phase	kW	HP			m ³ /h	0	1.2	1.8	2.4	3.6	4.8	6	7.2	8.4
						l/min	0	20	30	40	60	80	100	120	140
TURBOm 4B	TURBO 4B	1.1	1.5	IE2 IE3	H m		53	50	48.2	46.3	42	37	31.3	25	
TURBOm 4A	TURBO 4A	1.5	2				66	63.5	61.7	60	55.6	50.4	44.6	38	31

TURBO-6

TYPE		POWER (P ₂)		1~3~	Q										
Single-phase	Three-phase	kW	HP			m ³ /h	0	1.2	1.8	2.4	3.6	4.8	6	7.2	8.4
						l/min	0	20	30	40	60	80	100	120	140
TURBOm 6C	TURBO 6C	1.1	1.5	IE2 IE3	H m		48	47	45.8	44.7	41.8	38	33.3	27.7	21
TURBOm 6B	TURBO 6B	1.5	2				58	56.5	55.5	54.4	51.7	48.3	44.2	39.4	33.8
TURBOm 6A	TURBO 6A	2.2	3				68	66.5	65.7	64.5	61.6	58	53.5	48.4	42.6

Q = Flow rate H = Total manometric head HS = Suction height

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.


TURBO

ABSORPTION

TYPE	VOLTAGE
Single-phase	230 V
TURBOm 4B	7.0 A
TURBOm 4A	10.0 A
TURBOm 6C	7.0 A
TURBOm 6B	10.0 A
TURBOm 6A	12.0 A

TYPE	VOLTAGE	
Three-phase	230 V - Δ	400 V - ʌ
TURBO 4B	4.9 A	2.8 A
TURBO 4A	6.4 A	3.7 A
TURBO 6C	4.9 A	2.8 A
TURBO 6B	6.4 A	3.7 A
TURBO 6A	8.7 A	5.0 A

DIMENSIONS AND WEIGHT

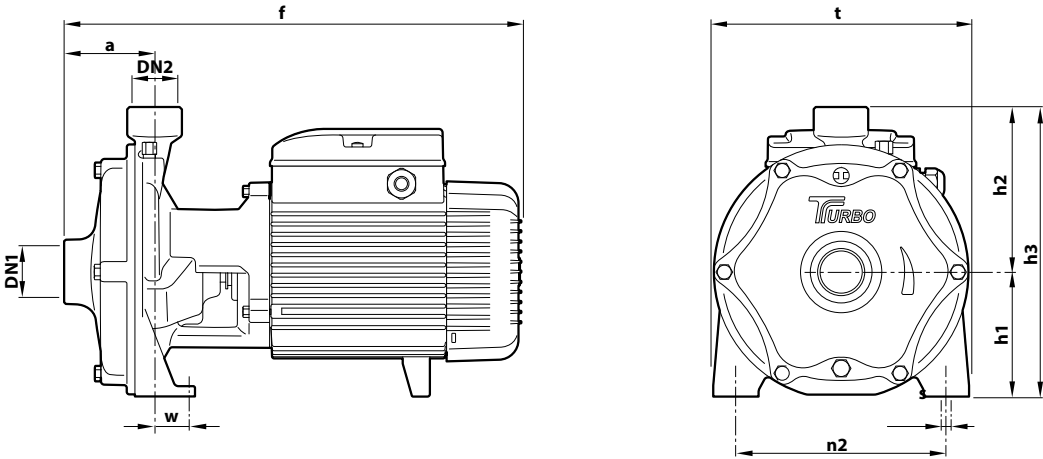


TYPE		PORTS		DIMENSIONS mm									kg	
Single-phase	Trifase	DN1	DN2	a	f	h1	h2	h3	t	n2	w	s	1~	3~
TURBOm 4B	TURBO 4B	1¼"	1"	80	403	93	132	225	203	162	17	10	21.5	21.0
TURBOm 4A	TURBO 4A					110	146	256	225	185	26	11	24.3	24.5
TURBOm 6C	TURBO 6C					93	132	225	203	162	17	10	21.4	20.9
TURBOm 6B	TURBO 6B					110	146	256	225	185	26	11	24.2	24.4
TURBOm 6A	TURBO 6A				423								27.1	27.3

PALLET CAPACITY

TYPE		NO. OF PUMPS
Single-phase	Three-phase	
TURBOm 4B	TURBO 4B	50
TURBOm 4A	TURBO 4A	50
TURBOm 6C	TURBO 6C	50
TURBOm 6B	TURBO 6B	50
TURBOm 6A	TURBO 6A	35

MATERIALS AND COMPONENTS

1	Suction body	Ghisa, provvisto di bocca di aspirazione filettata ISO 228/1		
2	Delivery port	Ghisa, provvisto di bocca di mandata filettata ISO 228/1		
3	Gaskets	NBR		
4	Impellers	Stainless steel AISI 304		
5	Mechanical seal	Seal	Shaft	Materials
		FN-18	Ø 18 mm	Grafite / Ceramica / NBR
6	Motor shaft	Stainless steel AISI 431		
7	Electric motor	TURBOM: single-phase 230 V - 50Hz with winding integrated thermal motor protection. TURBO: three-phase 230/400 V - 50 Hz – Pumps are equipped with high-efficiency motors (IEC 60034-30-1) class IE2 for single-phase models class IE3 for three-phase models – Continuous running duty S1		

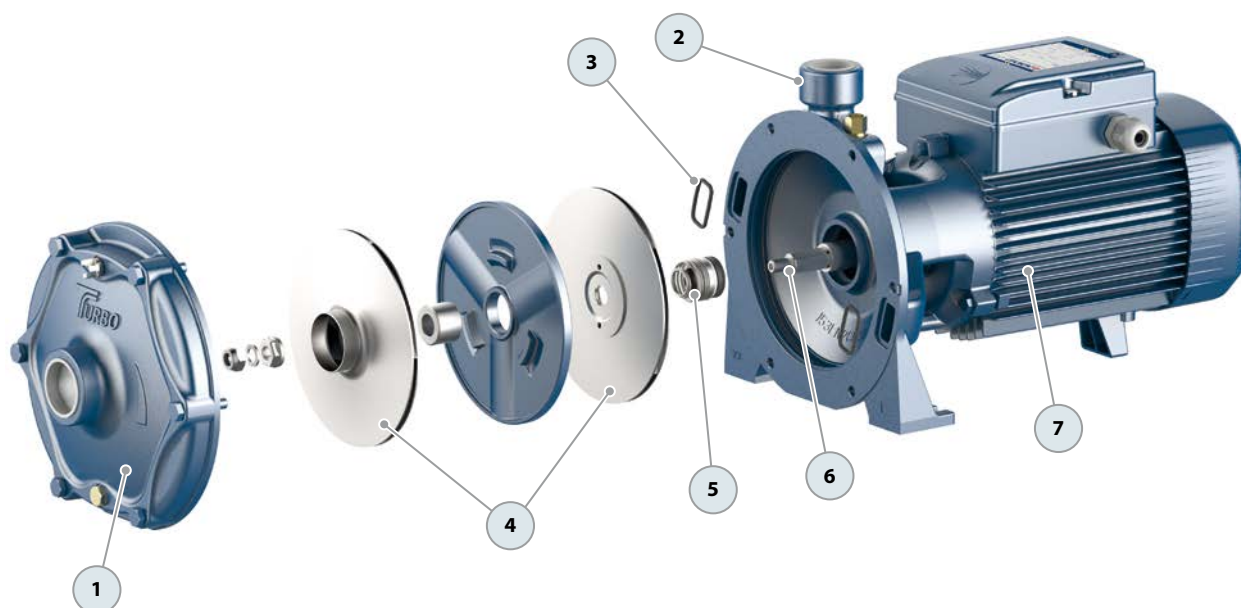

APPLICATION EXAMPLES

PRESSURE UNITS



PUMPS WITH INVERTERS



**TURBO-4B
TURBO-6C**



**TURBO-4A
TURBO-6A
TURBO-6B**