


NOCCHI SCM 4 PLUS 55

4" MULTISTAGE CENTRIFUGAL SUBMERSIBLE PUMPS COMPLETE WITH MOTOR

HYDRAULIC PERFORMANCE

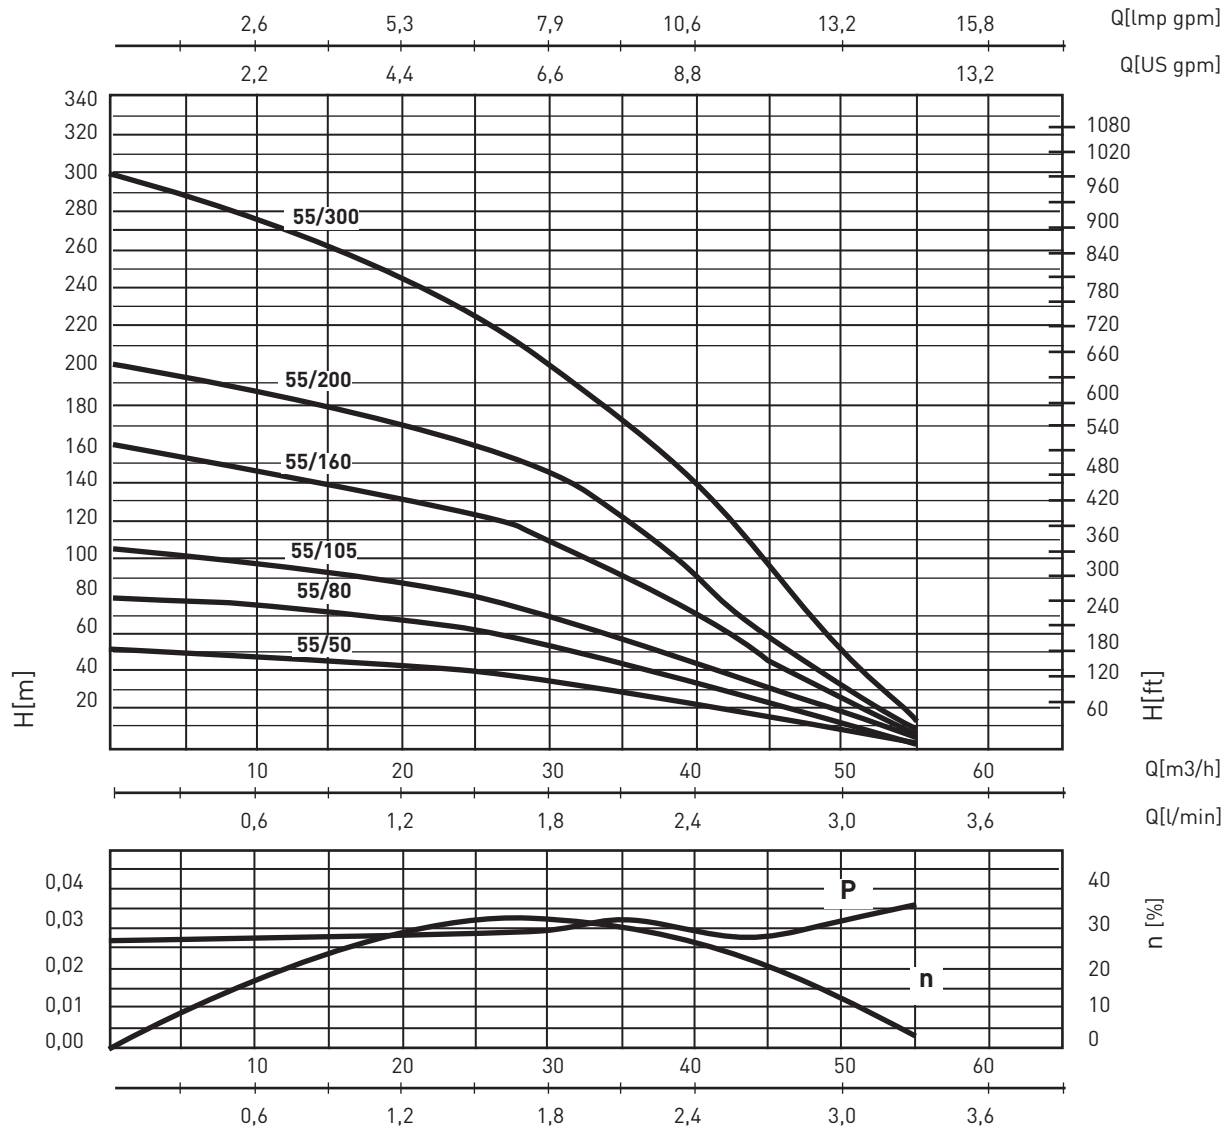

The power curve refers to the brake horse power (BHP) per stage. η_p % indicates the pump hydraulic efficiency
 MEI \geq 0,1 - Benchmark MEI \geq 0,70 - Information on benchmark efficiency is available at www.europump.org/efficiencycharts

PUMP PERFORMANCE

MODEL	N° Stages	Motor power		VOLT	In (A)	μ F.	Q	L/1'	10	20	30	40	50	\emptyset DNM
		HP	kW					m³/h	0,6	1,2	1,8	2,4	3	
SCM 4 PLUS-55/50 M SCM 4 PLUS-55/50 T	6	0,5	0,37	1 - 230 V 3 - 400 V	3,4 1,2	16	m.c.a. / m.c.w.		47	42	36	23	8	1"1/4
SCM 4 PLUS-55/80 M SCM 4 PLUS-55/80 T	10	0,75	0,55	1 - 230 V 3 - 400 V	4,4 1,7	20		75	66	55	35	12		
SCM 4 PLUS-55/105 M SCM 4 PLUS-55/105 T	12	1	0,75	1 - 230 V 3 - 400 V	5,9 2,2	30		98	87	72	46	12		
SCM 4 PLUS-55/160 M SCM 4 PLUS-55/160 T	18	1,5	1,1	1 - 230 V 3 - 400 V	7,8 3	40		145	132	110	70	24		
SCM 4 PLUS-55/200 M SCM 4 PLUS-55/200 T	24	2	1,5	1 - 230 V 3 - 400 V	10,2 4	50		187	169	145	90	30		
SCM 4 PLUS-55/300 T	37	3	2,2	3 - 400 V	5,6			278	244	200	140	50		