




Radial Press Jointing

	Cordless radial press Mini	129
	Pressing tongs Mini	132
	Cropping tongs Mini	147
	Manual radial press	148
	Electric radial press	149
	Electro-hydraulic radial presses	150
	Cordless radial presses	154
	Pressing tongs / pressing rings	156
  	Hold-Harmless and Indemnification Agreement	178
	Cropping tongs	179
	Cable shears	179

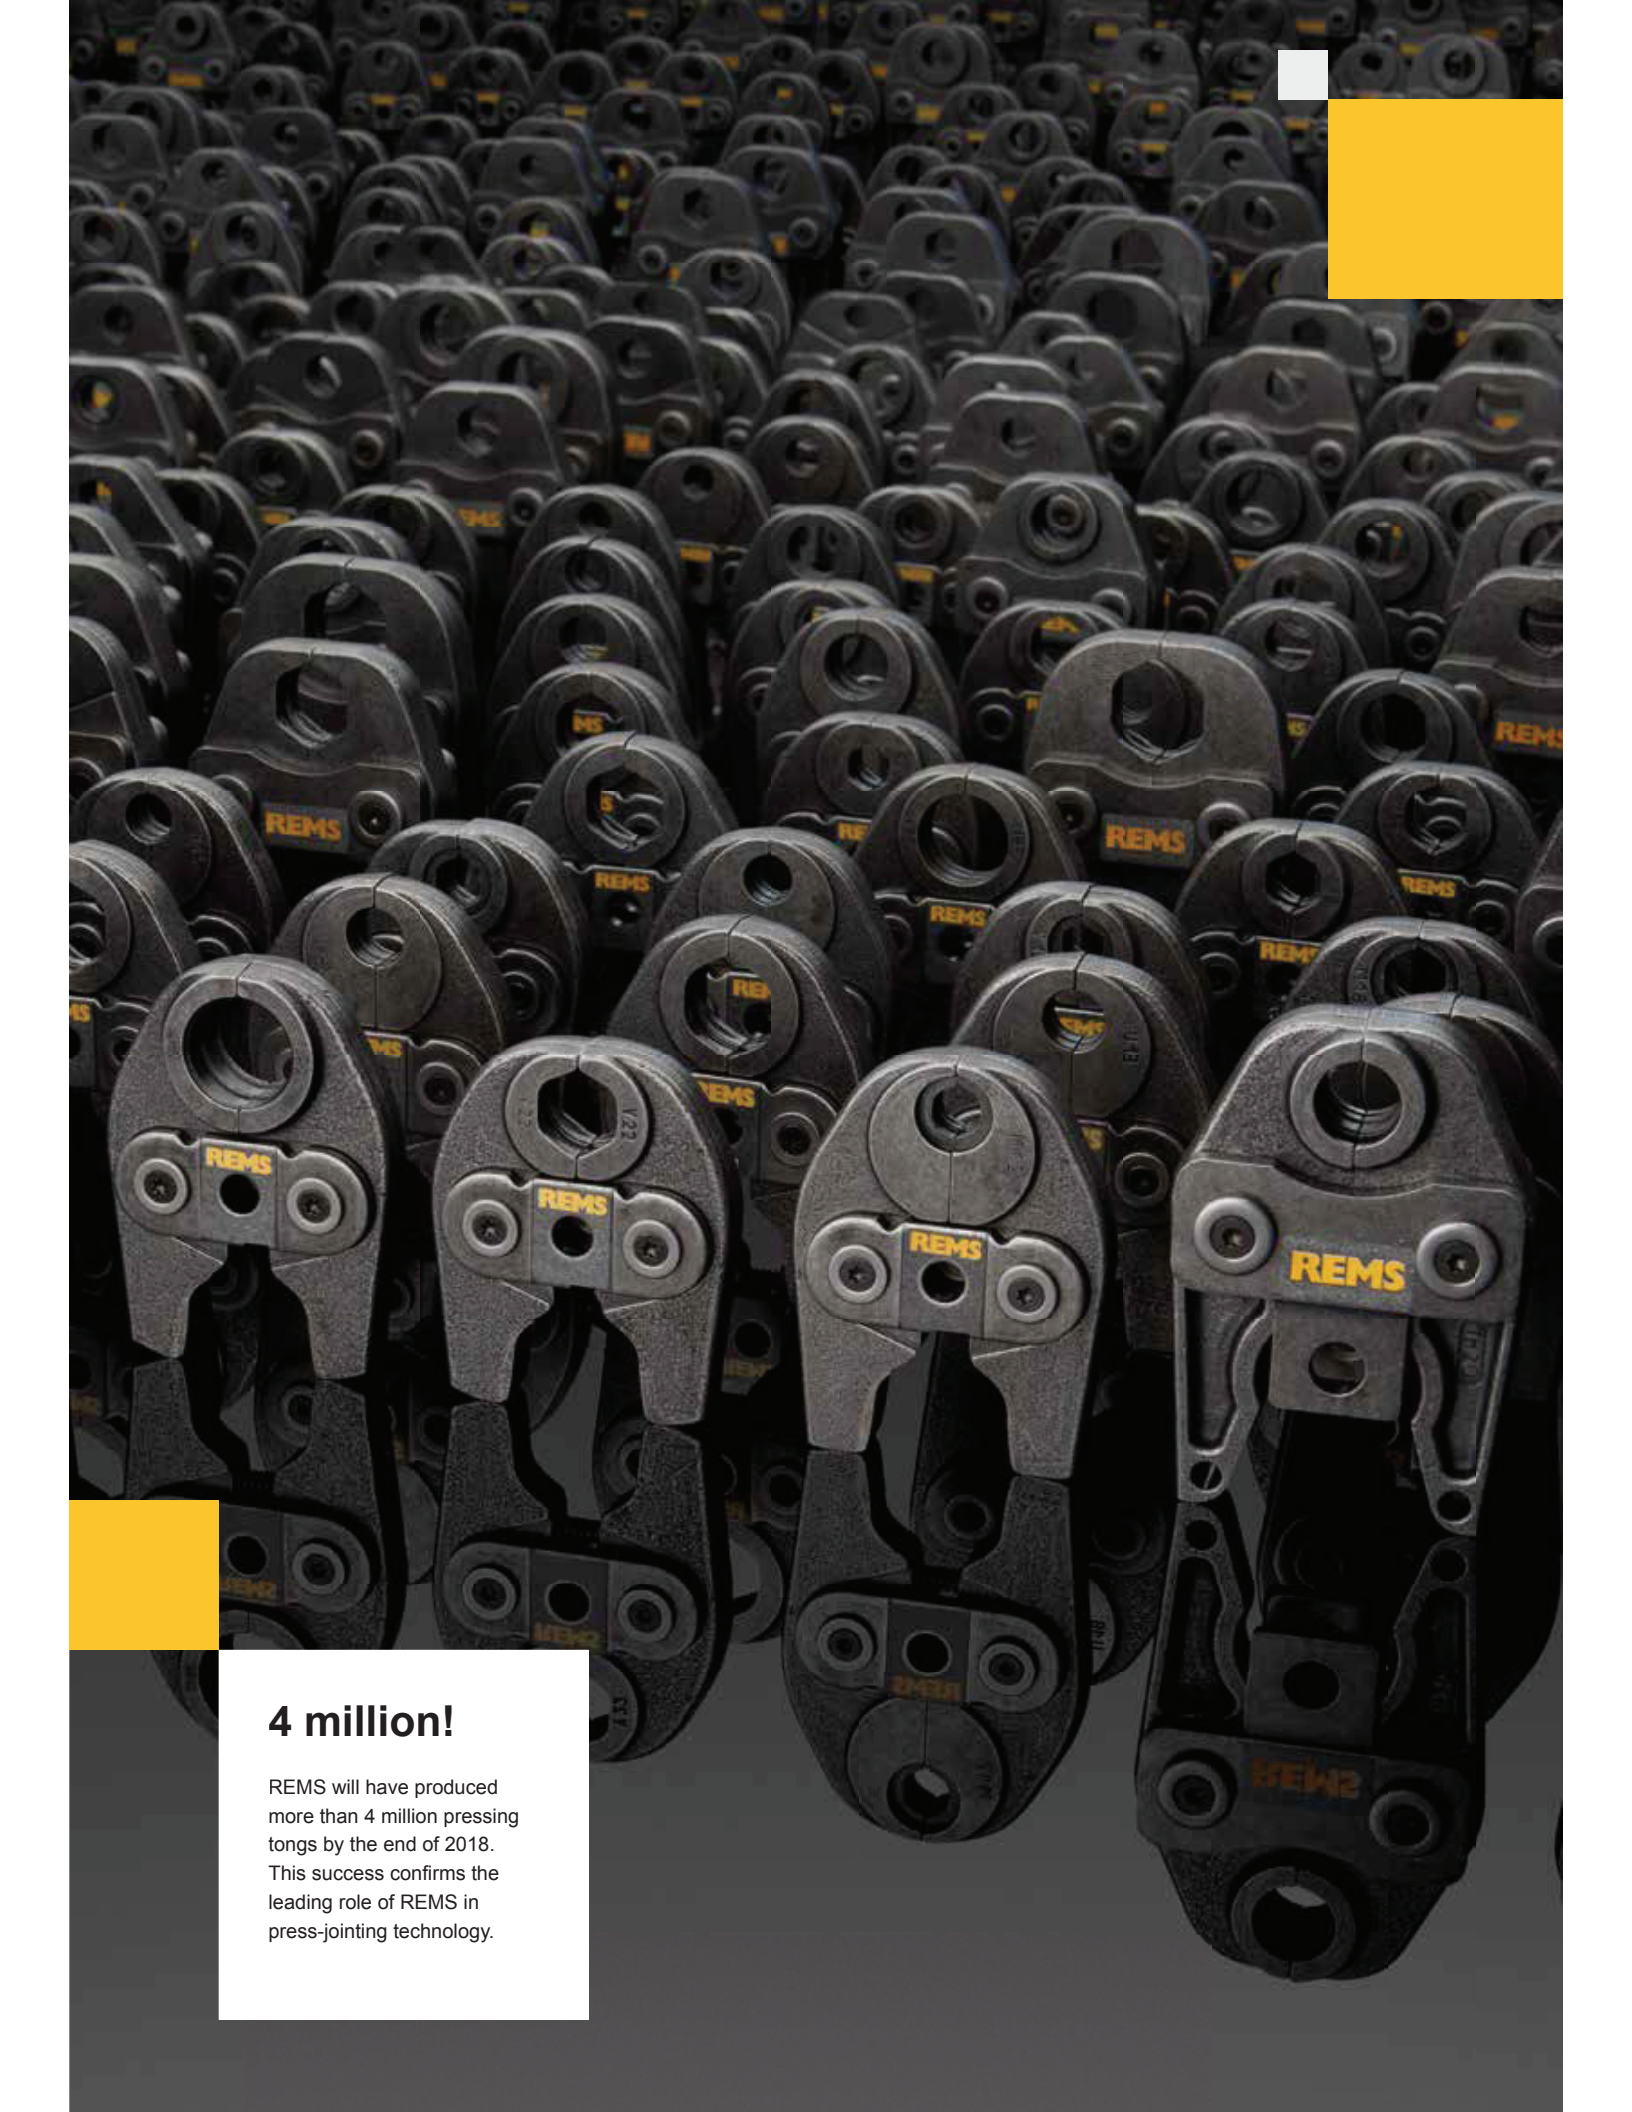

4 million!

REMS will have produced more than 4 million pressing tongs by the end of 2018. This success confirms the leading role of REMS in press-jointing technology.

REMS Mini-Press ACC

Cordless radial press with automatic circuit control

Universal, super handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints $\varnothing$ 10–40 mm 7 $\varnothing$ $\frac{3}{8}$ –1 $\frac{1}{4}$

Complete range of REMS pressing tongs Mini/pressing rings for all common pressfitting systems, see page 132–146.

REMS Mini-Press ACC – universal up to $\varnothing$ 40 mm. Super light, super small, super handy. With automatic circuit control. Secure crimping in seconds. Automatic locking of the pressing tongs.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs Mini/pressing rings for all common pressfitting systems (page 132–146). Highly durable pressing tongs/pressing rings made of forged, tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system-conformity, safe press jointing.

Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (**Patent EP 1 952 948**). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (**Patent EP 2 347 862**).

Design

Super light, super small, super handy. Drive unit with battery only 2.4 kg. Drive unit with pressing tongs V22 only 33 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Optimum weight distribution for single-hand operation. Ergonomically designed housing. Swivelling pressing tongs seat. Secure seating of pressing tongs/adaptor tongs by automatic locking. For battery and corded operation. Electronic charging status check with flat battery protection and charging status indicator with 2-coloured LED.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 22 kN. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 1.5 or 3.0 Ah capacity for long service life. Powerful and light. Li-Ion 14.4 V, 3.0 Ah battery for approx. 330 pressings Viega Profipress DN 15 per battery charge. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V/14.4 V voltage supply for mains operation 230 V instead of Li-Ion battery 14.4 V, as accessory.

Supply format

REMS Mini-Press ACC Basic-Pack. Cordless radial press with automatic circuit control for producing pipe pressing joints $\varnothing$ 10–40 mm, $\varnothing$ $\frac{3}{8}$ –1 $\frac{1}{4}$ ". For operating with REMS pressing tongs Mini/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, Safety tip switch. Integrated LED work light. Battery Li-Ion 14.4 V, 1.5 Ah, rapid charger Li-Ion/Ni-Cd 230 V or 110 V, 50–60 Hz, 65 W. In sturdy steel case.

	Art.-No.
	578012

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs Mini/pressing rings see page 132–146.	
REMS cropping tongs Mini for threaded rods see page 147.	
REMS Mini-Press ACC drive unit, without battery	578001
Battery Li-Ion 14.4 V, 1.5 Ah	571545
Battery Li-Ion 14.4 V, 3.0 Ah	571555
Rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W	571560
Voltage supply Li-Ion 230 V/14.4 V for mains operation 230 V instead of battery Li-Ion 14.4 V.	571565
Steel case with inlay	578290
REMS cordless LED lamp see page 97	175200



German Quality Product

Tested by electrosuisse



REMS Mini-Press 22 V ACC

Cordless radial press with automatic circuit control

Universal, super handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. Li-Ion 22 V Technology. For battery and corded operation.

Pipe pressing joints Ø 10–40 mm / Ø ¾–1 ¼"

Complete range of REMS pressing tongs Mini/pressing rings for all common pressfitting systems, see page 132–146.

REMS Mini-Press 22 V ACC – universal up to Ø 40 mm. Super light, super small, super handy, ultra fast. Pressing under 4 s. Automatic pressing process. With automatic circuit control. Li-Ion 22 V Technology for 50 % more pressings²⁾.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs Mini/pressing rings for all common pressfitting systems (page 132–146). Highly durable pressing tongs/pressing rings made of forged, tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system-conformity, safe press jointing.

Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (**Patent EP 1 952 948**). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (**Patent EP 2 347 862**).

Design

Super light, super small, super handy. Drive unit with battery only 2.5 kg. Drive unit with pressing tongs V 15 only 31 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing with soft grip. Swivelling pressing tongs seat, rotation angle > 360°. Secure seating of pressing tongs/adaptor tongs by automatic locking.

Pressing operation with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control). Ultra fast Pressing under 4 s.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 22 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion 22 V Technology. Highly resistant Li-Ion 21.6 V batteries with 1.5, 2.5, 4.1 or 5.0 Ah capacity for long service life. Powerful and light. Li-Ion 21.6 V batteries for 50 % more pressings²⁾ than Li-Ion 14.4 V batteries. Li-Ion 21.6 V, 1.5 Ah batteries for approx. 250 pressings Viega Profipress DN 15 per battery charge. Li-Ion 21.6 V, 2.5 Ah battery for approx. 390 pressings Viega Profipress DN 15 per battery charge. Graduated charging state display with coloured LED. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V/21.6 V voltage supply for mains operation 230 V instead of Li-Ion battery 21.6 V, as accessory.

Scope of Supply

REMS Mini-Press 22 V ACC Basic-Pack. Cordless radial press with automatic circuit control for producing pipe pressing joints Ø 10–40 mm, Ø ¾–1 ¼". For operating with REMS pressing tongs Mini/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Integrated LED work light. Battery Li-Ion 21.6 V, 1.5 Ah, rapid charger Li-Ion 230 V or 110 V, 50–60 Hz, 70 W. In sturdy steel case.

	Art.-No.
	578010


Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs Mini/pressing rings see page 132–146.	
REMS cropping tongs Mini for threaded rods see page 147.	
REMS Mini-Press 22 V ACC drive unit, without battery	578002
Battery Li-Ion 21.6 V, 1.5 Ah	571570
Battery Li-Ion 21.6 V, 2.5 Ah	571571
Battery Li-Ion 21.6 V, 4.1 Ah	571574
Battery Li-Ion 21.6 V, 5.0 Ah	571581
Rapid charger Li-Ion 230 V, 50–60 Hz, 70 W	571575
Voltage supply Li-Ion 230 V/21.6 V for mains operation 230 V instead of battery Li-Ion 21.6 V.	571567
Steel case with inlay	578290



German Quality Product



Tested by electrosuisse



Info



REMS Mini-Press S 22V ACC

Cordless radial press with automatic circuit control

Universal, super handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. Li-Ion 22V Technology. For battery and corded operation.

Pipe pressing joints Ø 10–40 mm / Ø ¾–1 ¼"

Complete range of REMS pressing tongs Mini/pressing rings for all common pressfitting systems, see page 132–146.

REMS Mini-Press S 22V ACC – universal up to Ø 40 mm. Super light, super small, super handy, ultra fast. Pressing under 4 s. Automatic pressing process. With automatic circuit control. Li-Ion 22V Technology for 50 % more pressings²⁾.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs Mini/pressing rings for all common pressfitting systems (page 132–146). Highly durable pressing tongs/pressing rings made of forged, tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system-conformity, safe press jointing.

Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (**Patent EP 1 952 948**). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (**Patent EP 2 347 862**).

Design

Super light, super small, super handy. Drive unit with battery only 2.6 kg. Works anywhere, free-hand, overhead, also in particularly tight areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing with soft grip. Swivelling pressing tongs seat, rotation angle >360°. Secure seating of pressing tongs/adaptor tongs by automatic locking.

Pressing operation with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control). Ultra fast Pressing under 4 s.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 22kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6 V batteries with 1.5, 2.5, 4.1 or 5.0Ah capacity for long service life. Powerful and light. Li-Ion 21.6 V batteries for 50 % more pressings²⁾ than Li-Ion 14.4 V batteries. Li-Ion 21.6 V, 1.5Ah batteries for approx. 250 pressings Viega Profipress DN 15 per battery charge. Li-Ion 21.6 V, 2.5Ah battery for approx. 390 pressings Viega Profipress DN 15 per battery charge. Graduated charging state display with coloured LED. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V/21.6 V voltage supply for mains operation 230 V instead of Li-Ion battery 21.6 V, as accessory.

Scope of Supply


REMS Mini-Press S 22V ACC Basic-Pack. Cordless radial press with automatic circuit control for producing pipe pressing joints Ø 10–40 mm, Ø ¾–1 ¼". For operating with REMS pressing tongs Mini/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Integrated LED work light. Battery Li-Ion 21.6 V, 1.5 Ah, rapid charger Li-Ion 230 V or 110 V, 50–60 Hz, 70 W. In sturdy steel case.

	Art.-No.
	578015


Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs Mini/pressing rings see page 132–146.	
REMS cropping tongs Mini for threaded rods see page 147.	
REMS Mini-Press S 22V ACC drive unit, without battery	578003
Battery Li-Ion 21.6V, 1.5Ah	571570
Battery Li-Ion 21.6V, 2.5Ah	571571
Battery Li-Ion 21.6V, 4.1Ah	571574
Battery Li-Ion 21.6V, 5.0Ah	571581
Rapid charger Li-Ion 230V, 50–60Hz, 70W	571575
Voltage supply Li-Ion 230 V/21.6 V for mains operation 230 V instead of battery Li-Ion 21.6 V.	571567
Steel case with inlay	578290



German Quality Product



Tested by electrosuisse



for all common pressfitting systems

Select REMS pressing tongs Mini/ REMS pressing rings yourself!

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the REMS pressing tongs Mini/pressing rings which are highlighted in yellow in the table. Adapter tongs (page 146) are necessary for driving the REMS pressing rings (PR).

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Driven by REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC. Read and follow the installation and assembly instructions of the system provider/manufacturer.

REMS pressing tongs Mini

REMS Mini pressing tongs with 2 swivellable monoblock pressing jaws. Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (**Patent EP 1 952 948**). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (**Patent EP 2 347 862**).

REMS Mini ACz, Fz, HEz, RFz, RFlz pressing tongs with teeth prevent formation of burr on the pressing sleeve (**Patent EP 2 027 971**).

REMS pressing ring 45° (PR-2B)

REMS pressing ring 45° (PR-2B), with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access by 45° inclination (**Patent EP 2 774 725**). Drive with adapter tongs.


Traceability according to EN 1775:2007

REMS pressing tongs Mini with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs have been used to make the pressfit connection even after the pressing process.


With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.



German Quality Product



REMS Mini pressing tongs



REMS pressing ring 45° (PR-2B)
Patent EP 2 774 725

Hold-Harmless and Indemnification Agreement

See page 178.


Confirmation of suitability

See page 177.





Pressing tongs with teeth
 Patent EP 2 027 971



Example REMS pressing tongs Mini V:
 "V" imprint on pressed fitting for
 traceability according to EN 1775:2007

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
A		
AC-FIX PRESS (Global Piping Systems)	H 12	578396
	H 16	578400
	H 20	578406
	H 25	578408
	H 32	578412
	RFz 12	578490
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	VX 16	578552
	VX 20	578554
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
AC-FIX PRESS-MULTI (Global Piping Systems)	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	H 16	578400
ACOME ACOPLEX ALU	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 32	578382
ACOME MT	ACz 12	578608
	ACz 16	578610
	ACz 20	578612
	ACz 25	578614
	ACz 32	578616
AHLSELL A-press elförzinkad	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	578324
	V 15	578328
	V 18	578332
AHLSELL A-press rostfritt	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	M 15	578312
AIRBEL PRESSCLIM	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522

System	Pressing contour	Art.-No.
AIRBEL SERTINOX	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
ALB Sistema Multicapa	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
ALB Sistema Multicapa Gas	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	B 16	578468
	B 20	578472
	B 26	578476
APE Serie AP	B 32	578478
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	TH 16	578352
AQUATECHNIK Universal	TH 20	578358
	TH 26	578362
	TH 32	578364
	B 16	578468
	B 20	578472
	B 26	578476
	B 32	578478
	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
ARKA DUROsystem	H 16	578400
	H 20	578406
	H 25	578408
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	C 26	578392
	U 32	578382
	H 16	578400
	H 20	578406
	H 25	578408
ASCHL NIR	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530

System	Pressing contour	Art.-No.
ASSOTHERM IPC-RAC Carbon Steel	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
ASSOTHERM IPI-RAX Inox	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
ASSOTHERM IPM-Multistrato	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	THL 32	578368
	U 16	578374
	U 20	578378
	C 26	578392
	U 32	578382
	M 15	578312
	M 18	578314
ASSOTHERM IPR-RRR Copper	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
ASSOTHERM IPR-RRR Copper Gas	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US 3/8"	578534
	US 1/2"	578536
	US 3/4"	578538
	US 1"	578540
	US 1 1/4"	578542
B		
Bampi BALPEX (serie MP)	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
Bampi BALPEX Gas	TH 40	578624
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
BARBI EASYPRESS (Industrial Blansol)	H 12	578396
	H 16	578400
	H 20	578406
	H 25	578408
	H 32	578412
	RFz 12	578490
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	H 14	578398
BARBI MULTIPEX (Industrial Blansol)	H 16	578400
	H 18	578404
	H 20	578406
	H 25	578408
	H 26	578410
	H 32	578412
	RFz 16	578492
	RFz 18	578494
	RFz 20	578496
	RFz 25	578498
	RFz 32	578499
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
BEGETUBE/ IVAR	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
	B 14	578466
	B 16	578468
	B 18	578470
	B 20	578472
	B 26	578474
	B 32	578476

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
BRASELI GPF GAS	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 32	578364
BRASELI Pressfitting PE-X	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
BRASELI Pressfitting Multicapa	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
Brass Form Master Press	H 16	578400
	H 18	578404
	H 20	578406
	TH 16	578352
	TH 18	578356
	TH 20	578358
	U 16	578374
	U 18	578376
Brass & Fittings PRESSMAN MultiPress	RFz 16	578492
	RFz 18	578638
	ACz 20	578612
	RFz 25	578496
	RFz 32	578498
	RFz 16	578492
Brass & Fittings PRESSMAN RetiPress	RFz 18	578638
	ACz 20	578612
	RFz 25	578496
	RFz 32	578498
BRASSTECH MULTIthermoSAN Brasspress	B 16	578468
	B 20	578472
	B 26	578474
	B 32	578476
	F 16	578456
	F 20	578460
	F 26	578462
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 16	578374
	U 18	578376
	U 20	578378
	C 26	578392
	U 32	578382

C

Cello Products Press	VUS ½" (OD 15,9 mm)	578566
	VUS ¾" (OD 22,2 mm)	578568
	VUS 1" (OD 28,6 mm)	578570
	VUS 1½" (OD 34,9 mm)	578606
CHIALI CHIALIPEX	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
Climatek Clima Therm	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
Climatrix Climatrix Rhinopex	H 16	578400
	H 20	578406
	U 16	578374
	U 20	578378
	TH 14	578348
	TH 16	578352
ClouSet	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 16	578352
	TH 18	578356
Comap PEX Press	RFz 12	578490
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496

System	Pressing contour	Art.-No.
Comap Multiskin	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	THL 32	578368
	TH 40	578624
	TH 16	578352
	TH 20	578358
	THL 32	578368
COMISA Press System	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
	H 14	578398
	H 16	578400
COMISA Press System Gas	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
CONEL CONNECT MULTI	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
(DN 26)	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	VP 16	578482
	VP 20	578484
	VP 32	578488

D

DIWASystems	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
DUOFIL MKSYSYSTEM	TH 32	578364
	TH 40	578624
	U 16	578374
	U 18	578376
DW Verbundrohr multitubo systems	U 20	578378
	U 25	578380
	U 32	578382

E

EBRILLE Isomonflex	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	H 26	578410
	TH 26	578362
	U 32	578382
	U 14	578372
EBRILLE Moniflex	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	H 26	578410
	TH 26	578362
	U 32	578382
	U 40	578386

System	Pressing contour	Art.-No.
EFFEBI PRESSTIGE	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
EFFEBI TOF-GAS MULTIPINZA	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
EFFEBI TOF MULTIPINZA	U 16	578374
	U 20	578378
	U 32	578382
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	F 16	578456
EFFEBI TOF MULTIPINZA	F 18	578458
	F 20	578460
	F 26	578462
	F 32	578464
	Fz 40	578478
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16	578400
EFIELD MULTILAYER PRESS DINGAS	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
EFIELD MULTILAYER PRESS WATER	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	VUS ½" (OD 15,9 mm)	578566
	VUS ¾" (OD 22,2 mm)	578568
	VUS 1" (OD 28,6 mm)	578570
	VUS 1½" (OD 34,9 mm)	578606
	B 16	578468
Elkhart APOLLOXPRESS Fittings Copper and Low-Lead Brass	B 20	578472
	B 26	578474
	B 32	578476
	F 16	578456
	F 20	578460
	H 16	578400
	H 20	578406
	TH 16	578352
	TH 20	578358
	TH 26	578362
EMMETI GERPEX- FIVPRESS	TH 32	578364
	TH 40	578624
	U 16	578374
	U 20	578378
	TH 15	578350
	TH 17	578354
	TH 20	578358

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For taking suitable pressing inserts.

3) Adapter tongs are required for driving pressing rings (PR), see page 146.

4) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2018. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
EURACCORDI	M 15	578312
SYCPRESS	M 18	578314
STAINLESS	M 22	578316
STEEL PRESS	M 28	578318
FITTINGS	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
EURACCORDI	M 15	578312
SYCPRESS	M 18	578314
CARBON STEEL	M 22	578316
PRESS FITTINGS	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
EUROTUBI	M 12	578310
EUROPA	M 15	578312
C-Steel Pressfitting	M 18	578314
System M-Profile ¹⁾	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
EUROTUBI	M 15	578312
EUROPA	M 18	578314
Inox Pressfitting	M 22	578316
System M-Profile ¹⁾	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Evans	VAU 15 (1/2")	578630
Components	VAU 20 (3/4")	578632
Presslok	VAU 25 (1")	578634

F

FAR Rubinetterie	TH 14	578348
PRESSFAR	TH 16	578352
	TH 17	578354
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
	H 14	578398
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
F.B.Q. BARONIO	V 12	578324
BQ press	V 14	578326
	V 15	578328
	V 16	578330
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 14 45° (PR-2B) ³⁾	574532
	V 15 45° (PR-2B) ³⁾	574504
	V 16 45° (PR-2B) ³⁾	574534
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
F.B.Q. BARONIO	V 15	578328
BQ press	V 18	578332
carbon steel	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
F.B.Q. BARONIO	V 15	578328
BQ press gas	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

Fercofloor	RFz 16	578492
DUO Press	RFz 20	578494
FERCO PEX	RFz 25	578496
	RFz 32	578498
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 32	578364
Fercofloor	RFz 16	578492
DUO Press	RFz 20	578494
MULTIFER	RFz 25	578496
	RFz 32	578498
	TH 16	578358
	TH 25	578360
	TH 32	578364
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
FILINOX	M 15	578312
Instalpress	M 18	578314
Steel	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
FILINOX	M 15	578312
Instalpress	M 18	578314
Inox	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Fittings Estándar	RFz 16	578492
ECO-PRESS	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
Fittings Estándar	RFz 16	578492
MULTICAPA	RFz 18	578638
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
Fittings Estándar	RFz 16	578492
PE-X	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
FOHS	TH 16	578352
HEIZTECHNIK	TH 20	578358
FOHSPRESS	TH 26	578362
	TH 32	578364
FORNARA	B 16	578468
ForPress	B 20	578472
	B 26	578474
	B 32	578476
	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 32	578382
FRABO	V 12	578324
CHROMEPPRESS	V 15	578328
	V 18	578332
	V 22	578334
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
FRABO	V 12	578324
FRABOPRESS	V 15	578328
C-STEEL	V 18	578332
Securfrabo	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
FRABO	V 12	578324
FRABOPRESS	V 15	578328
316 SECURFRABO	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

FRABO	V 15	578328
FRABOPRESS	V 18	578332
316 GAS	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
FRABO	H 16	578400
FRABOPRESS	H 20	578406
MULTI-BRASS	TH 16	578352
(MB)	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
FRABO	H 16	578400
FRABOPRESS	H 20	578406
MULTI-PLUS	H 26	578410
(MP)	U 16	578374
	U 20	578378
FRABO	V 22	578334
FRABOPRESS	V 28	578336
NEXT	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
FRABO	V 12	578324
FRABOPRESS	V 15	578328
SECURFRABO	V 18	578332
FRABOPRESS H ₂ O	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
FRABO	V 12	578324
FRABOPRESS	V 15	578328
SECURFRABO	V 18	578332
FRABOPRESS Gas	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
FRABO	V 15	578328
SOLARPRESS	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
FRABO FRABO	M 22	578316
TS PRESS	M 22 45° (PR-2B) ³⁾	574526
	V 22	578334
	V 22 45° (PR-2B) ³⁾	574508
Fränkische	B 16	578468
alplex-duo	B 18	578470
	B 20	578472
	B 26	578474
	B 32	578476
	F 16	578456
	F 18	578458
	F 20	578460
	F 26	578462
	F 32	578464
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
Fränkische	F 16	578456
alplex F50 PROFIL	F 20	578460
	F 26	578462
	F 32	578464
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	VP 16	578482
	VP 20	578484
	VP 32	578488

(DN 26)

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
Fränkische alpeX-gas	F 20	578460
	F 26	578462
	F 32	578464
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
Fränkische alpeX L	Fz 40	578478
G		
gaboTherm H+S	TH 10	578342
	TH 12	578346
	TH 14	578348
	TH 15	578350
	TH 16	578352
	TH 17	578354
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
Gallagher USA YogaPipe ACR	H 12 (1/4")	578396
	U 14 (3/4")	578372
	U 16 (1/2")	578374
	U 18 (3/4")	578376
	U 20 (3/4")	578378
Geberit Mapress C-STÄHL	U 25 (1/4")	578380
	U 32 (1 1/4")	578382
	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Geberit Mapress EDELSTÄHL	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Geberit Mapress EDELSTÄHL Gas	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Geberit Mapress KUPFER	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Geberit Mapress KUPFER Gas	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Geberit Mepla	G 16	578444
	G 20	578446
	G 26	578448
	G 32	578450
	G 40	578452
Geberit Mepla Therm	G 16	578444
	G 20	578446
	G 26	578448
Geberit Volex	TH 16	578352
	TH 20	578358
	TH 26	578362

System	Pressing contour	Art.-No.
General Fittings 5T00	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 32	578382
General Fittings Serie 5S00	B 16	578468
	B 18	578470
	B 20	578472
	B 26	578474
	B 32	578476
	F 16	578456
	F 20	578460
	F 26	578462
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	H 16	578400
	H 18	578404
	H 20	578406
General Fittings Trident	H 25	578408
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
General Fittings Trident	U 32	578382
	U 40	578386
General Fittings Trident Gas	B 16	578468
	B 20	578472
	B 26	578474
	B 32	578476
	F 16	578456
	F 20	578460
	F 26	578462
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
Giacomini Raccordi RM Giacomini	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 32	578382
Giacomini RM MULTIGAS	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 32	578382
	U 40	578386
Giacomini romapress	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 32	578382
	U 40	578386
Henco	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362

System	Pressing contour	Art.-No.
Giacomini Valvole Giacomini serie R850V	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 15	578312
Golan Pipe Systems (Scandinavia) Alu-Press	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
Grinnell G-PRESS Copper Fittings	VUS 1/2" (OD 15,9 mm)	578566
	VUS 3/4" (OD 22,2 mm)	578568
	VUS 1" (OD 28,6 mm)	578570
	VUS 1 1/4" (OD 34,9 mm)	578606
GS Wärmesysteme System TH	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
GS Wärmesysteme System V	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
H		
HakaGerodur HakaGerodur- System	TH 10	578342
	TH 11,6	578344
	TH 12	578346
	TH 14	578348
	TH 16	578352
	TH 17	578354
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
HASTINIK Hastinik/Hitpress	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
heima-press	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
HELIROMA klimapress	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
HELIROMA romapress	U 40	578386
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
Henco	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	HE 32	578370
	HEz 40 ⁴⁾	578572

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For taking suitable pressing inserts.

3) Adapter tongs are required for driving pressing rings (PR), see page 146.

4) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2018. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
Herotec TEMPUS-PRESS PLUS	H 16	578400
	H 20	578406
	H 25	578408
	H 32	578412
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 32	578364
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
Herz PIPEFIX	TH 10	578342
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
HIDRONIX MULTIGAS	TH 16	578352
	TH 20	578358
	TH 26	578362
HIDRONIX MULTIPIPE	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	H 14	578398
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
	C 26	578392
	U 32	578382
HIDRONIX UNICO	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	H 14	578398
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
	C 26	578392
	U 32	578382
HITEC Sistema Multistrato	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
Hopewell press fit system	TH 40	578624
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
hp praski BAVARIA-press	M 35	578390
	TH 10	578342
	TH 14	578348
	TH 16	578352
	TH 17	578354
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
IBP >B< Flex	TH 10	578342
	TH 14	578348
	TH 16	578352
	TH 17	578354
	TH 20	578358
IBP >B< Press	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624

System	Pressing contour	Art.-No.
IBP >B< Press Carbon	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
IBP >B< Press Gas	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
IBP >B< Press Inox	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
IBP >B< Press Solar	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
ICMA Sempiter	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 16	578374
ICMA Sempigas	U 20	578378
	U 32	578382
	U 40	578386
	TH 16	578352
	TH 20	578358
Idrosanitaria Bonomi	TH 26	578362
	TH 32	578364
	TH 40	578624
Idrosanitaria Homegas	TH 16	578352
	TH 20	578358
	TH 26	578362
Idrosanitaria Bonomi	TH 16	578352
	TH 18	578356
	TH 20	578358
Idropress	TH 26	578362
	TH 32	578364
	TH 40	578624
IDROSISTEMI Ta-Press	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	Fz 40	578478
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	C 26	578392
	U 32	578382
	U 40	578386
	B 16	578468
	B 20	578472
	B 26	578474
	B 32	578476
IDROTRADE Storm Multipinza	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 16	578374
	U 20	578378
	U 26	578382
	U 32	578386
	U 40	578386

System	Pressing contour	Art.-No.
IDROTRADE Storm Multistrato	H 14	578398
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
IDROTRADE StormPRES	U 40	578386
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
IDROTRADE StormSTEEL	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
ILTA INOX/CHIBRO Pressfitting Cuni	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
ILTA INOX/CHIBRO Pressfitting inox	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
IPA IPANA Press	TH 10	578342
	TH 11,6	578344
	TH 12	578346
	TH 14	578348
	TH 15	578350
	TH 16	578352
	TH 17	578354
	TH 18	578356
	TH 20	578358
	TH 22	578360
IPA THu IPANA Press	TH 25	578362
	TH 26	578364
	TH 32	578366
	TH 40	578624
IPALPEX (Industrie du Plastique et Accessoires)	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	THL 32	578368
	TH 40	578624
	K16/P18	578592
	K/20	578594
	K/25	578596
IPLEX PIPELINES AUSTRALIA Iplex K1 (Gas)	K32	578598
	K1/40	578600
	K16/P18	578592
	K/20	578594
	K/25	578596
IPLEX PIPELINES AUSTRALIA Iplex K2	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
ISOTUBI NUMEPRESS	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
IVAR Ivar-Press	B 14	578466
	B 16	578468
	B 18	578470
	B 20	578472
	B 26	578474
	B 32	578476
	Fz 40	578478
	TH 16	578352
	TH 20	578358
	TH 26	578362
IVAR MULTI PRESS GAS	TH 32	578364
	TH 32	578364
	B 16	578468
	B 20	578472
	B 26	578474
IVAR MULTI PRESS GAS ITALIA	B 32	578476
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	U 26	578382
	U 32	578386
	U 40	578386

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
K		
KAN	U 16	578374
KAN-therm	U 20	578378
	U 25	578380
	C 26	578392
	U 32	578382
	U 40	578386
KAN	TH 14	578348
KAN-therm LBP	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 14	578372
	U 16	578374
	U 20	578378
	U 25	578380
	C 26	578392
	U 32	578382
	U 40	578386
KAN	M 15	578312
KAN-therm	M 18 ¹⁾	578314
Inox	M 22	578316
	M 28 ¹⁾	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
KAN	M 15	578312
KAN-therm	M 18 ¹⁾	578314
Steel	M 22	578316
	M 28 ¹⁾	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
KE KELIT	U 16	578374
KELIT KELOX	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
KE KELIT	M 15	578312
COPPERFIX	M 18	578314
Kupfer	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
KE KELIT	M 15	578312
steelFIX	M 18	578314
C-Stahl	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
KE KELIT	M 15	578312
steelFIX	M 18	578314
Edelstahl	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
KEMBLA	VAU 15 (OD 12,7 mm)	578630
KempPress	VAU 20 (OD 19,1 mm)	578632
(AUS)	VAU 25 (OD 25,4 mm)	578634
	VAU 32 (OD 31,8 mm)	578636
KEMBLA	VAU 15 (OD 12,7 mm)	578630
KempPress Gas	VAU 20 (OD 19,1 mm)	578632
(AUS)	VAU 25 (OD 25,4 mm)	578634
	VAU 32 (OD 31,8 mm)	578636
KISAN	KI 16	578524
Kisan KD	KI 20	578526
	KI 25	578528
	TH 16	578352
	TH 20	578358
	TH 25	578360

Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
KISAN Kisan WL	KI 16	578524
	KI 20	578526
	KI 25	578528
	KI 32	578530
	TH 16	578352
	TH 20	578358
KISAN Kisan WM	TH 25	578360
	TH 32	578364
	KI 16	578524
	KI 20	578526
	KI 25	578528
	KI 32	578530
KISAN Kisan WR	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
KISAN Kistal C	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
KISAN Kistal Inox	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
KME cuprotherm CTX	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
KME QTEC - Comap SkinPress	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
KME QTEC - Oventrop Cofit	H 16 A	578420
	H 20 A	578426
	H 26 A	578430
L		
LECHAR ALCOBRAPEX	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
LECHAR COBRAPEX	TH 40	578624
	U 16	578374
	U 20	578378
	U 25	578380
LEGEND-PRESS press fitting system	U 32	578382
	VUS ½" (OD 15,9 mm)	578566
	VUS ¾" (OD 22,2 mm)	578568
	VUS 1" (OD 28,6 mm)	578570
LK Systems LK >B<Press	VUS 1½" (OD 34,9 mm)	578606
	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
LK Systems LK >B<Press Elfozinkat	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
LK Systems LK >B<Press Gas	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	TH 16	578352
	TH 20	578358
LK Systems LK Universal	TH 25	578360
	TH 32	578364
	TH 40	578624
LVI-DAHL Altech-Alupex	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
M		
MAINCOR MAINPRESS	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386

System	Pressing contour	Art.-No.
MAINCOR MAINFLOR	U 16	578374
	U 20	578378
	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
Mair Heiztechnik Gomafix Cu/E ¹⁾	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	H 11,5	578394
	H 14	578398
Mair Heiztechnik Gomafix M	H 16	578400
	H 20	578406
Mair Heiztechnik M-Press	H 11,5	578394
	H 14	578398
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
Ma.s.ter System PRESSMASTER	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
	H 14	578398
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
METALGRUP Permatubo	U 25	578380
	U 32	578382
	U 40	578386
	U 16	578374
	U 18	578376
METALGRUP PexGrup	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
METALGRUP MultiGrup	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
Mueller Industries Streamline PRS	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
Multicapas Industrial AIS PEX	VUS ½" (OD 15,9 mm)	578566
	VUS ¾" (OD 22,2 mm)	578568
	VUS 1" (OD 28,6 mm)	578570
	VUS 1½" (OD 34,9 mm)	578606
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
Multicapas Industrial multitubo systems MC	RFz 32	578498
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
	MT 20	578560
	MT 25	578562
	MT 32	578564
	U 16	578374
	U 18	578376
Multicapas Industrial multitubo systems MM	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
	H 16	578400
	H 20	578406
	H 25	578408
	H 26	578410
	H 32	578412
	MT 20	578560
	MT 25	578562
	MT 32	578564
NEUTHERM MEKUPRESS-HT	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 16	578374
	U 20	578378
N		
NEUTHERM MEKUPRESS-HT	U 25	578380
	U 32	578382
	U 40	578386
	H 16	578400
NUPI Industrie Italiane Multinupi	H 20	578406
	H 26	578410
	H 32	578412
	H 40	578414
Nussbaum Optiflex-Flowpress	B 16	578468
	B 18	578470
	B 20	578472
	B 26	578474
	B 32	578476
	F 16	578456
	F 18	578458
	F 20	578460
	F 26	578462
	F 32	578464
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
Nussbaum Optiflex Press	H 32	578412
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
	C 26	578392
	U 32	578382
Nussbaum Optipress Aquaplus	U 40	578386
	VRX 16	578640
	VRX 20	578642
	VRX 25	578644
	VRX 32	578646
	VP 16	578482
Nussbaum Optipress Gaz	VP 20	578484
	VP 25	578486
	VP 32	578488
	V 15	578328
	V 18	578332
	V 22	578334
Nussbaum Optipress-Therm	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
O.M.T. - Press	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	H 16 A	578420
	H 20 A	578426
Oventrop Cofit P	H 26 A	578430
	H 32 A	578432
Oventrop Cofit PD	H 16 A	578420
	H 20 A	578426
	H 26 A	578430
Oventrop Cofit PDK	H 16 A	578420
	H 20 A	578426
	H 26 A	578430
Oventrop Cofit PD-HT	H 16 A	578420
	H 20 A	578426
	H 26 A	578432
Oventrop Cofit PDK-HT	H 16 A	578420
	H 20 A	578426
	H 26 A	578432
O		
Oventrop Cofit P	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
Oventrop Cofit PD	H 16 A	578420
	H 20 A	578426
	H 26 A	578430
	H 32 A	578432
Oventrop Cofit PDK	H 16 A	578420
	H 20 A	578426
	H 26 A	578430
Oventrop Cofit PD-HT	H 16 A	578420
	H 20 A	578426
	H 26 A	578432
Oventrop Cofit PDK-HT	H 16 A	578420
	H 20 A	578426
	H 26 A	578432
P		
PBTub SERTIPRESS	RFz 12	578490
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
POLYSAN	V 15	578328
Handelsges.	V 18	578332
m.b.H. & Co KG	V 22	578334
(Krems/Öster-reich)	V 28	578336
	V 35	578604
POLYSAN-	V 15 45° (PR-2B) ³⁾	574504
C Stahl-Press-	V 18 45° (PR-2B) ³⁾	574506
System V	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
POLYSAN	M 15	578312
Handelsges.	M 18	578314
m.b.H. & Co KG	M 22	578316
(Krems/Öster-reich)	M 28	578318
	M 35	578390
POLYSAN-	M 15 45° (PR-2B) ³⁾	574522
Edelstahl	M 18 45° (PR-2B) ³⁾	574524
Press-System	M 22 45° (PR-2B) ³⁾	574526
Gas	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
POLYSAN	M 15	578312
Handelsges.	M 18	578314
m.b.H. & Co KG	M 22	578316
(Krems/Öster-reich)	M 28	578318
	M 35	578390
POLYSAN-	M 15 45° (PR-2B) ³⁾	574522
Edelstahl	M 18 45° (PR-2B) ³⁾	574524
Press-System	M 22 45° (PR-2B) ³⁾	574526
Wasser	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
POLYSAN	TH 14	578348
Handelsges.	TH 16	578352
m.b.H. & Co KG	TH 17	578354
(Krems/Öster-reich)	TH 18	578356
	TH 20	578358
POLYSAN-	TH 26	578362
Press-System	TH 32	578364
	TH 40	578624
POLYSAN	TH 14	578348
Handelsges.	TH 16	578352
m.b.H. & Co KG	TH 17	578354
(Krems/Öster-reich)	TH 18	578356
	TH 20	578358
POLYSAN-Henco-	TH 26	578362
Press-System		
POLYSAN	U 16	578374
(España)	U 18	578376
Rainbow	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
Prandelli	H 14	578398
Multyrama Pf	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	U 40	578386
Prandelli	H 16	578400
Multyrama Pfm	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 16	578374
	U 18	578376
	U 20	578378
	U 40	578386
R		
Raccorderie	M 15	578312
Metallische	M 18	578314
aesPRES ¹⁾	M 22	578316
	M 28	578318
Raccorderie	M 15	578312
Metallische	M 18	578314
inoxPRES ¹⁾	M 22	578316
	M 28	578318
Raccorderie	M 15	578312
Metallische	M 18	578314
steelPRES ¹⁾	M 22	578316
	M 28	578318
RBM Tita-gas	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364

Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
RBM Tita-fix	B 14	578466
	B 16	578468
	B 18	578470
	B 20	578472
	B 26	578474
	F 16	578456
	F 18	578458
	F 20	578460
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	H 14	578398
	H 16	578400
	H 18	578404
	H 20	578406
	H 26	578410
	H 32	578412
	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
Redi Nicoll Fluxo	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
Redi Nicoll Fluxo Gas	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
RIFENG LD PRESS FITTING (F8)	LD 16	578652
	LD 20	578654
	LD 25	578656
RIFENG U PRESS FITTING (F5)	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
RIFENG TH PRESS FITTING (F9)	TH 16	578352
	TH 20	578358
	TH 25	578360
	TH 26	578362
	TH 32	578364
RIQUIER A SERTIR	RFz 12	578490
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
Roth PressCheck	RN 14	578434
	RN 16	578454
	RN 17	578436
	RN 20	578438
	RN 25/26	578440
	RN 32	578442
	TH 16	578352
Roth España - Global Plastic Rothapress	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 32	578364
	TH 40	578624
Rubinetteria Bresciane Bonomi	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
TURBO PRESS	TH 26	578362
	TH 32	578364
	TH 40	578624
Rubinetteria Bresciane Bonomi	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
S		
SA.MI plastic	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	TH 40	578624
SA.MI plastic Multistrato Gas	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 32	578364

System	Pressing contour	Art.-No.
SANHA 3fit-Press Pb-free Serie 25000	B 16	578468
	B 20	578472
	B 26	578474
	B 32	578476
	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	Fz 40	578478
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 16	578374
	U 20	578378
	C 26	578392
	U 32	578382
	U 40	578386
SANHA 3fit-Press PPSU Serie 35000	B 16	578468
	B 20	578472
	B 26	578474
	B 32	578476
	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
SANHA-NiroSan Gas Presssystem Serie 17000	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 15 ¹⁾	578312
	M 18 ¹⁾	578314
	M 22 ¹⁾	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15 ¹⁾	578328
	V 18 ¹⁾	578332
SANHA-NiroSan Industry Presssystem Serie 18000	V 22 ¹⁾	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 15 ¹⁾	578312
	M 18 ¹⁾	578314
	M 22 ¹⁾	578316
	M 28	578318
SANHA-NiroSan Industry Presssystem Serie 98000	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15 ¹⁾	578328
	V 18 ¹⁾	578332
	V 22 ¹⁾	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

System	Pressing contour	Art.-No.
SANHA-NiroSan Presssystem Serie 9000	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 15 ¹⁾	578312
	M 18 ¹⁾	578314
	M 22 ¹⁾	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15 ¹⁾	578328
	V 18 ¹⁾	578332
	V 22 ¹⁾	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 15 ¹⁾	578312
	M 18 ¹⁾	578314
	M 22 ¹⁾	578316
	M 28	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15 ¹⁾	578328
	V 18 ¹⁾	578332
SANHA-NiroTherm Serie 91000	V 22 ¹⁾	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 15 ¹⁾	578312
	M 18 ¹⁾	578314
	M 22 ¹⁾	578316
	M 28	578318
SANHA-NiroTherm Industry Serie 98000	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15 ¹⁾	578328
	V 18 ¹⁾	578332
	V 22 ¹⁾	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
SANHA-Press Chrom Serie 16000	SA 12	578510
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15 ¹⁾	578312
	M 18 ¹⁾	578314
	M 22 ¹⁾	578316
	M 28	578318
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	V 12	578324
	V 15 ¹⁾	578328
	V 18 ¹⁾	578332
	V 22 ¹⁾	578334
	V 28	578336
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12	578510
	SA 14	578512
	SA 15	578514
	SA 16	578516
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15 ¹⁾	578312
	M 18 ¹⁾	578314
	M 22 ¹⁾	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	578324
	V 14	578326
	VG 16	578340
	V 15 ¹⁾	578328
	V 16	578330
	VG 16	578340
SANHA-Press Pressfittings Serie 6000	V 18 ¹⁾	578332
	V 22 ¹⁾	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	VG 14 45° (PR-2B) ³⁾	574536
	V 15 45° (PR-2B) ³⁾	574504
	VG 16 45° (PR-2B) ³⁾	574538
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	SA 12	578510
	SA 14	578512
	SA 15	578514
	SA 16	578516
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15 ¹⁾	578312
	M 18 ¹⁾	578314
	M 22 ¹⁾	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	578324
	V 14	578326
	VG 14	578338
	V 15 ¹⁾	578328
	V 16	578330
	VG 16	578340
	V 18 ¹⁾	578332
	V 22 ¹⁾	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	VG 14 45° (PR-2B) ³⁾	574536
	V 15 45° (PR-2B) ³⁾	574504
	VG 16 45° (PR-2B) ³⁾	574538
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

System	Pressing contour	Art.-No.
SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12	578510
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15 ¹⁾	578312
	M 18 ¹⁾	578314
	M 22 ¹⁾	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	578324
	V 15 ¹⁾	578328
	V 18 ¹⁾	578332
	V 22 ¹⁾	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
SANHA PURAPRESS Serie 8000	SA 12	578510
	SA 14	578512
	SA 15	578514
	SA 16	578516
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12 ¹⁾	578310
	M 15 ¹⁾	578312
	M 18 ¹⁾	578314
	M 22 ¹⁾	578316
	M 28 ¹⁾	578318
	M 35 ¹⁾	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	578324
	V 14	578326
	VG 14	578338
	V 15 ¹⁾	578328
	V 16	578330
	VG 16	578340
	V 18 ¹⁾	578332
	V 22 ¹⁾	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	VG 14 45° (PR-2B) ³⁾	574536
	V 15 45° (PR-2B) ³⁾	574504
	VG 16 45° (PR-2B) ³⁾	574538
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
SANHA-Therm Serie 24000	SA 12	578510
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15 ¹⁾	578312
	M 18 ¹⁾	578314
	M 22 ¹⁾	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	578324
	V 14	578326
	VG 14	578338
	V 15 ¹⁾	578328
	V 16	578330
	VG 16	578340
	V 18 ¹⁾	578332
	V 22 ¹⁾	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	VG 14 45° (PR-2B) ³⁾	574536
	V 15 45° (PR-2B) ³⁾	574504
	VG 16 45° (PR-2B) ³⁾	574538
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

System	Pressing contour	Art.-No.
SANHA-Therm Industry Serie 28000	SA 12	578510
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522
	M 12	578310
	M 15 ¹⁾	578312
	M 18 ¹⁾	578314
	M 22 ¹⁾	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	578324
	V 15 ¹⁾	578328
	V 18 ¹⁾	578332
	V 22 ¹⁾	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
SANPRO THPRESS	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
SATEC SK ViTerm	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 40	578366
Schütz duo-flex tri-o-flex	TH 14	578348
	TH 16	578352
	TH 17	578354
	TH 20	578358
	TH 25	578360
Schwer Fittings AQUApress	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Seppelfricke VSH SudoPress C-Stahl Visu-Control	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Seppelfricke Seppelfricke VSH SudoPress Edelstahl Visu-Control	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Seppelfricke VSH SudoPress Kupfer Visu-Control	V 12	5783

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
Seppelfricke	V 12	578324
VSH SudoPress	V 15	578328
Kupfer Gas	V 18	578332
Visu-Control	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Seppelfricke	V 15	578328
VSH SudoPress	V 18	578332
Kupfer Solar	V 22	578334
Visu-Control	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
Seppelfricke	M 12	578310
VSH XPress	M 15	578312
C-Stahl	M 18 ¹⁾	578314
	M 22	578316
	M 28 ¹⁾	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Seppelfricke	M 15	578312
VSH XPress	M 18 ¹⁾	578314
Edelstahl	M 22	578316
	M 28 ¹⁾	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Seppelfricke	M 15	578312
VSH XPress	M 18 ¹⁾	578314
Edelstahl gas	M 22	578316
	M 28 ¹⁾	578318
	M 35	578390
Seppelfricke	M 12	578310
VSH XPress	M 15	578312
Kupfer	M 18 ¹⁾	578314
	M 22	578316
	M 28 ¹⁾	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Seppelfricke	M 15	578312
VSH XPress	M 18 ¹⁾	578314
Kupfer gas	M 22	578316
	M 28 ¹⁾	578318
	M 35	578390
SESTA	TH 14	578348
SESTA GAS	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
SESTA	H 16	578400
sistema	H 20	578406
multistrato	TH 14	578348
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 16	578374
	U 20	578378
SLOVARM	U 16	578374
PEX-THERM	U 20	578378
	H 26	578410
	U 32	578382
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
SOMATHERM	H 16	578400
MULTIX	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 32	578382
SOMATHERM	H 12	578396
SomaPRESS	H 16	578400
	H 20	578406
	H 25	578408
	RFz 12	578490
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	U 16	578374
	U 20	578378
	U 25	578380

System	Pressing contour	Art.-No.
STANDARD	U 16	578374
HIDRAULICA	U 18	578376
MultiStandard	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
STELBI	H 16	578400
Polikraft	H 20	578406
	H 26	578410
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	U 16	578374
	U 20	578378
STELBI	TH 16	578352
Stelgas	TH 20	578358
	TH 26	578362
STPC STPEX	TH 16	578352
	TH 20	578358
	TH 26	578362
System Ewoprex	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	U 32	578382
System	H 16 A	578420
WELCO-Gas	H 20 A	578426
	H 26 A	578430
	H 32 A	578432
System	H 14 A	578418
WOPREX	H 16 A	578420
	H 17 A	578422
	H 20 A	578426
	H 26 A	578430
	H 32 A	578432
T		
TDM BRASS	H 16	578400
Serie 1600	H 18	578404
	H 20	578406
	H 25	578408
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	THL 32	578368
	TH 40	578624
	U 16	578374
	U 18	578376
	U 20	578378
	U 25	578380
	C 26	578392
	U 32	578382
TDM BRASS	TH 16	578352
Serie 1700 gas	TH 20	578358
	TH 26	578362
	THL 32	578368
TermoConcept	Basic E01 ³⁾	578618
TC-PRESS		
THERMOLUTZ	H 14	578398
	H 16	578400
	TH 20	578358
TE-SA	TH 14	578348
TE-SA press	TH 16	578352
serie 800	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
TIEMME	TH 14	578348
AL-COBRAPEX	TH 16	578352
Serie 1650	TH 18	578356
	TH 20	578358
	TH 25	578360
	TH 26	578362
	THL 32	578368
	TH 40	578624
TIEMME	RFz 12	578490
Serie 1700 PE-X	RFz 16	578492
a pressare	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
TIEMME	TH 16	578352
TIEMME Gas	TH 20	578358
	TH 26	578362
	THL 32	578368
TIGRE	TH 16	578352
ALPEX GAS	TH 20	578358
	TH 26	578362
	TH 32	578364
TKM	TH 14	578348
Systemtechnik	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624

System	Pressing contour	Art.-No.
TRA	U 16	578374
MULTITRAPRESS	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
TRA TRAPRESS	H 12	578396
	H 16	578400
	H 20	578406
	H 25	578408
	H 32	578412
	RFz 12	578490
	RFz 16	578492
	RFz 20	578494
	RFz 25	578496
	RFz 32	578498
TWEETOP	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
U		
UNICAL AG	U 16	578374
MAX-MULTIPEX	U 20	578378
	H 26	578410
	C 26	578392
	U 32	578382
UNIDELTA	TH 16	578352
DeltAll	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	U 32	578382
	U 40	578386
UNIDELTA	TH 16	578352
DeltAll GAS	TH 20	578358
	TH 26	578362
	TH 32	578364
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	U 16	578374
	U 20	578378
	U 32	578382
Uponor MLC	UP 14	578576
	UP 16	578578
	UP 18	578580
	UP 20	578582
	UP 25	578584
	UP 32	578586
	U 40	578386
Uponor MLC-D	UP 16	578578
	UP 20	578582
	UP 25	578584
	UP 32	578586
Uponor MLC-G	UP 20	578582
	UP 25	578584
	UP 32	578586
Uponor	UP 16	578578
Uni Pipe PLUS	UP 20	578582
	UP 25	578584
	UP 32	578586
V		
Valsir Bravopress	B 16	578468
	B 20	578472
	B 26	578474
	B 32	578476
	F 16	578456
	F 20	578460
	F 26	578462
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	H 32 V	578602
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	C 26	578392
	U 32	578382
Valsir PEXAL	H 14	578398
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	H 32 V	578602
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
	U 20	578378
	C 26	578392
	U 32	578382

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
Van Marcke Log. Tubipex	TH 16	578352
	TH 17	578354
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
Van Marcke Log. Tubipress	M 12	578310
	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
Variotherm System TH	TH 11,6	578344
	TH 16	578352
	TH 20	578358
	TH 26	578362
Viega Fonterra	VX 12	578550
	VP 14/15	578480
	VP 16/17	578482
	VP 20	578484
Viega Pexfit	VX 16	578552
	VX 20	578554
	VX 25	578556
Viega Pexfit Fosta G	VX 16	578552
	VX 20	578554
	VX 25	578556
Viega Prestabo	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 12	578324
	V 15	578328
Viega Profipress	VG 14	578338
	V 15	578328
	VG 16	578340
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	VG 14 45° (PR-2B) ³⁾	574536
	V 15 45° (PR-2B) ³⁾	574504
	VG 16 45° (PR-2B) ³⁾	574538
	V 18 45° (PR-2B) ³⁾	574506
Viega Profipress G	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
Viega Profipress S	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506

System	Pressing contour	Art.-No.
Viega	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Viega ProPress System USA	VUS ½" (OD 15,9 mm)	578566
	VUS ¾" (OD 22,2 mm)	578568
	VUS 1" (OD 28,6 mm)	578570
	VUS 1¼" (OD 34,9 mm)	578606
Viega ProPress AUS	VAU 15 (OD 12,7 mm)	578630
	VAU 20 (OD 19,1 mm)	578632
	VAU 25 (OD 25,4 mm)	578634
	VAU 32 (OD 31,8 mm)	578636
Viega ProPressG GAS System AUS	VAU 15 (OD 12,7 mm)	578630
	VAU 20 (OD 19,1 mm)	578632
	VAU 25 (OD 25,4 mm)	578634
	VAU 32 (OD 31,8 mm)	578636
Viega Raxinox	VRX 16	578640
	VRX 20	578642
Viega Raxofix	VRX 16	578640
	VRX 20	578642
	VRX 25	578644
	VRX 32	578646
Viega Sanfix	VP 16/17	578482
	VP 20	578484
	VP 25	578486
	VP 32	578488
Viega Sanpress	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Viega Sanpress Inox	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Viega Sanpress Inox G	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Viessmann	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 26	578362
VINSAR PEX-AL-PEX	TH 32	578364
	TH 16	578352
	TH 20	578358
	TH 26	578362
Vogel & Noot EASYTEC	TH 32	578364
	TH 16	578352
	TH 20	578358
	TH 26	578362

System	Pressing contour	Art.-No.
VSH MultiPress	U 14	578372
	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
	TH 14	578348
	TH 16	578352
	TH 20	578358
	TH 25	578360
VSH SudoPress Carbon	TH 26	578362
	TH 32	578364
	TH 40	578624
	V 12	578324
VSH SudoPress Copper	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
VSH SudoPress Copper Gas	V 35	578604
	V 12	578324
	V 15	578328
	V 18	578332
VSH SudoPress Stainless	V 22	578334
	V 28	578336
	V 35	578604
	V 15	578328
VSH XPress Carbon	V 18	578332
	M 12	578310
	M 15	578312
	M 18 ¹⁾	578314
	M 22	578316
	M 28 ¹⁾	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
VSH XPress Copper	M 12	578310
	M 15	578312
	M 18 ¹⁾	578314
	M 22	578316
	M 28 ¹⁾	578318
	M 35	578390
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
VSH XPress Copper GAS	M 15	578312
	M 18 ¹⁾	578314
	M 22	578316
	M 28 ¹⁾	578318
VSH XPress Stainless	M 35	578390
	M 15	578312
	M 18 ¹⁾	578314
	M 22	578316
VSH XPress Stainless	M 28 ¹⁾	578318
	M 35	578390
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For taking suitable pressing inserts.

³⁾ Adapter tongs are required for driving pressing rings (PR), see page 146.

⁴⁾ Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2018. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC

System	Pressing contour	Art.-No.
VSH	M 15	578312
XPress Stainless	M 18 ⁽¹⁾	578314
Gas	M 22	578316
	M 28 ⁽¹⁾	578318
	M 35	578390
W		
Meier Tobler	U 16	578374
Metalplast - Stramax	U 18	578376
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
Watts MTR	TH 16	578352
Art press	TH 20	578358
	TH 26	578362
	TH 32	578364
WATTS	US ¾"	578534
RADIANT	US ½"	578536
Watts WaterPEX	US ¾"	578538
	US 1"	578540
WATTS	US ¾"	578534
RADIANT	US ½"	578536
Watts	US ¾"	578538
RadiantPEX	US 1"	578540
WATTS	U 16 (¾")	578374
RADIANT	U 20 (¾")	578378
Watts	U 25 (¾")	578380
RadiantPEX-AL	U 32 (1")	578382
Wavin	U 14	578372
Tigris K1/K5	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
Wavin	U 14	578372
Tigris M1/M5	U 16	578374
	U 20	578378
	U 25	578380
	U 32	578382
	U 40	578386
WeeConPress	M 12	578310
Alu	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ⁽³⁾	574520
	M 15 45° (PR-2B) ⁽³⁾	574522
	M 18 45° (PR-2B) ⁽³⁾	574524
	M 22 45° (PR-2B) ⁽³⁾	574526
	M 28 45° (PR-2B) ⁽³⁾	574528
	M 35 45° (PR-2B) ⁽³⁾	574530
	V 12	578324
	V 15	578328
	V 18	578332
	V 22	578334
	V 28	578336
	V 35	578604
	V 12 45° (PR-2B) ⁽³⁾	574502
	V 15 45° (PR-2B) ⁽³⁾	574504
	V 18 45° (PR-2B) ⁽³⁾	574506
	V 22 45° (PR-2B) ⁽³⁾	574508
	V 28 45° (PR-2B) ⁽³⁾	574510
	V 35 45° (PR-2B) ⁽³⁾	574512
	SA 12	578510
	SA 15	578514
	SA 18	578518
	SA 22	578520
	SA 28	578522

System	Pressing contour	Art.-No.
WeeConPress	M 12	578310
C-Stahl	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ⁽³⁾	574520
	M 15 45° (PR-2B) ⁽³⁾	574522
	M 18 45° (PR-2B) ⁽³⁾	574524
	M 22 45° (PR-2B) ⁽³⁾	574526
	M 28 45° (PR-2B) ⁽³⁾	574528
	M 35 45° (PR-2B) ⁽³⁾	574530
WeeConPress	M 12	578310
Inox	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ⁽³⁾	574520
	M 15 45° (PR-2B) ⁽³⁾	574522
	M 18 45° (PR-2B) ⁽³⁾	574524
	M 22 45° (PR-2B) ⁽³⁾	574526
	M 28 45° (PR-2B) ⁽³⁾	574528
	M 35 45° (PR-2B) ⁽³⁾	574530
WeeConPress	M 12	578310
Kupfer	M 15	578312
	M 18	578314
	M 22	578316
	M 28	578318
	M 35	578390
	M 12 45° (PR-2B) ⁽³⁾	574520
	M 15 45° (PR-2B) ⁽³⁾	574522
	M 18 45° (PR-2B) ⁽³⁾	574524
	M 22 45° (PR-2B) ⁽³⁾	574526
	M 28 45° (PR-2B) ⁽³⁾	574528
	M 35 45° (PR-2B) ⁽³⁾	574530
WeeConFlex	H 16	578400
MVR	H 20	578406
	H 26	578410
	H 32	578412
	U 40	578386
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
WEM	U 16	578374
WIELAND	TH 14	578348
cuprotherm	TH 16	578352
CTX	TH 18	578356
	TH 20	578358
	TH 26	578362
WKS-Press	TH 14	578348
	TH 16	578352
	TH 17	578354
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
WÜRTH	TH 16	578352
Würth	TH 20	578358
	TH 26	578362
	HE 32	578370

System	Pressing contour	Art.-No.
X		
XtraConnect	F 16	578456
	F 20	578460
	F 26	578462
	F 32	578464
	F 16 45° (PR-2B) ⁽³⁾	574550
	F 20 45° (PR-2B) ⁽³⁾	574552
	F 26 45° (PR-2B) ⁽³⁾	574554
	F 32 45° (PR-2B) ⁽³⁾	574556
	H 16	578400
	H 20	578406
	H 26	578410
	H 32	578412
	TH 16	578352
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 16	578374
(DN 26)	U 20	578378
	U 25	578380
	U 32	578382
	VP 16	578482
	VP 20	578484
	VP 32	578488
Z		
Zetaesse	TH 14	578348
Multistrato	TH 16	578352
EUROPEX	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
Zetaesse	TH 14	578348
Multistrato	TH 16	578352
ISOPEX	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	U 14	578372
	U 16	578374
	U 18	578376
	U 20	578378
ZEWO THERM	TH 12	578346
Zewo Press Premium	TH 16	578352
	TH 17	578354
	TH 18	578356
	TH 20	578358
	TH 26	578362
	TH 32	578364
	TH 40	578624
ZEWO THERM	TH 16	578352
Zewo Press PPSU	TH 20	578358
	TH 26	578362
	TH 32	578364
ZURN	US ¾"	578534
INDUSTRIES	US ½"	578536
ZURN PEX	US ¾"	578538
	US 1"	578540

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For taking suitable pressing inserts.
- Adapter tongs are required for driving pressing rings (PR), see page 146.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2018. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

Pressing tongs for additional pressfitting systems on request.

Accessories

Description	Art.-No.	
Adapter tongs Mini Z1 for driving REMS pressing rings 45° (PR-2B)	578558	
Steel case with insert for adapter tongs Mini Z1 and adapter tongs Z1 and 6 REMS pressing rings V 12–35 45° (PR-2B) or M 12–35 45° (PR-2B)	574516	
Steel case with insert for 8 pressing tongs Mini/cropping tongs Mini and compartment for pipe cutter up to 42 mm	578295	



REMS cropping tongs Mini

Accessories for REMS Mini-Press ACC, REMS Mini-Press 22 V ACC and REMS Mini-Press S 22 V ACC

High performance cropping tongs Mini in forged and specially hardened steel for cutting threaded rods.

Steel, stainless steel up to hardness classification 4.8 (400 N/mm²) M 6–M 10

REMS cropping tongs Mini – cuts in just 2 seconds!

Made of forged and specially hardened steel.




Reversible cropping inserts for double service life.

M cropping inserts with high precision thread contour machined on CNC machining centres for exact guiding of the threaded rod in the cutting process. Pliers parts, cropping inserts and specially machined and hardened cutting edges, made to fit exactly, for cutting without burr.

Threaded rod can be screwed into a threaded connection of the pipe clip or the nut without rework after cutting.

Cutting device in pliers design (**Patent EP 1 459 825, patent US 7,284,330**). Very compact design and low weight of the REMS Mini cropping tongs due to special arrangement of the cropping tongs connection (**Patent EP 1 952 948**). Recesses in the connecting plate for safe guidance of the connecting lugs for offset-free pressing (**Patent EP 2 347 862**).

Driven by REMS Mini-Press ACC, REMS Mini-Press 22 V ACC and REMS Mini-Press S 22 V ACC.



Supply format

REMS cropping tongs Mini. Cropping tongs with 1 pair of reversible cropping inserts for steel, stainless steel, M 6–M 10. In a carton.

Description	for threaded rods	Art.-No.	
REMS cropping tongs Mini M 6	M 6	578620	
REMS cropping tongs Mini M 8	M 8	578621	
REMS cropping tongs Mini M 10	M 10	578622	



German Quality Product



Patent EP 1 952 948
Patent EP 1 459 825
Patent US 7,284,330
Patent EP 2 347 862

Accessories

Description	for threaded rods	Art.-No.	
Cropping inserts M 6 (pair)	M 6	571891	
Cropping inserts M 8 (pair)	M 8	571896	
Cropping inserts M 10 (pair)	M 10	571866	
Steel case with insert for 8 pressing tongs Mini/cropping tongs Mini and compartment for pipe cutter up to 42 mm		578295	



Universal, manual radial press for producing pipe pressing joints for all common pressfitting systems.

Pressing joints with plastic and multi-layer composite tubes $\varnothing 10-26 \text{ mm}$
 $\varnothing \frac{3}{8}-1"$

Complete range of REMS pressing tongs for all common pressfitting systems, see page 156–176.

REMS Eco-Press – universal up to $\varnothing 26 \text{ mm}$. Secure crimping in seconds.

System advantage

Only **one** type of pressing tongs for all REMS radial presses (except for REMS Mini-Press ACC, REMS Mini-Press 22 V ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection (**Patent DE 101 01 440**, **Patent EP 1 223 008**, **Patent US 6,739,172**) and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs for all common pressfitting systems (page 156–176). Highly durable pressing tongs made of forged, tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs are system-specific and correspond to the respective pressfitting system. Thus perfect systemconformity, safe press jointing.

Design

Compact, handy, light. Drive unit with short tubular arms only 1.6 kg. Works anywhere, free-hand, overhead, in confined areas. Secure seating of pressing tongs through locking pins. Dividable tubular arms for individual adjustment of leverage to accomodate different force demands of different pressfitting systems.

Pressing operation

A perfect joint is achieved when pressing tongs close completely. Final-lock-positioning, the pressing jaws remain in a closed position until opening. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.



German Quality Product



Info

Supply format

REMS Eco-Press drive unit. Manual radial press with final-lock-positioning for producing pressing joints of plastic and multi-layer composite tubes $\varnothing 10-26 \text{ mm}$, $\varnothing \frac{3}{8}-1"$. For operating with REMS pressing tongs. With dividable tubular arms. In skin package.

	Art.-No.	
	574000	



Accessories

Description	Art.-No.	
REMS pressing tongs , see page 156–176.		
REMS cropping tongs for threaded rods see page 179.		
Carrying bag for drive unit and for 3 pressing tongs	574436	
Steel case with insert for drive unit and for 3 pressing tongs	574430	



REMS Power-Press SE

Electric radial press

Universal, handy electric tool for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints $\varnothing$ 10–108 (110) mm
 $\varnothing$ $\frac{3}{8}$ –4"

Complete range of REMS pressing tongs/
pressing rings for all common pressfitting systems,
see page 156–176.

REMS Power-Press SE – universal up to $\varnothing$ 110 mm.

Secure crimping in seconds.

Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses (except for REMS Mini-Press ACC, REMS Mini-Press 22 V ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection (**Patent DE 101 01 440, Patent EP 1 223 008, Patent US 6,739,172**) and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 156–176). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect systemconformity, safe press jointing.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Secure seating of pressing tongs/adaptor tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing chains.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. The pressing tongs remain in a closed position until machine is switched and runs into reverse. The perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-mechanical drive with proven universal motor, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle. Overload protection. Safety tip switch.



Tested by electrosuisse >>>

German Quality Product



Info

Supply format

REMS Power-Press SE Basic-Pack. Electric radial press for producing pressing joints $\varnothing$ 10–108 (110) mm, $\varnothing$ $\frac{3}{8}$ –4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-mechanical drive with proven universal motor 230 V or 110 V, 50–60 Hz, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle, overload protection, safety tip switch. In sturdy steel case.

	Art.-No.	
	572111	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS Power-Press SE Drive Unit	572101	
REMS pressing tongs/pressing rings see page 156–176.		
REMS cropping tongs for threaded rods see page 179.		
REMS cable shear for electric cable see page 179.		
Steel case with insert	570280	



REMS Power-Press

Electro-hydraulic radial press with switch-off signal

Universal, handy electric tool with switch-off signal for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints $\varnothing$ 10–108 (110) mm
 $\varnothing$ $\frac{3}{8}$ –4"

Complete range of REMS pressing tongs/
pressing rings for all common pressfitting systems,
see page 156–176.

REMS Power-Press – universal up to $\varnothing$ 110 mm.

Secure crimping in seconds.

Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses (except for REMS Mini-Press ACC, REMS Mini-Press 22 V ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection (**Patent DE 101 01 440**, **Patent EP 1 223 008**, **Patent US 6,739,172**) and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 156–176). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect systemconformity, safe press jointing.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Ideal weight distribution for single handed operation. Ergonomically designed housing with recessed grip. Swivelling pressing tongs/adaptor tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. Acoustic signal after successful completion of pressing operation. The pressing tongs remain in a closed position until reset button is pushed and releases. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with proven universal motor 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.



Tested by electrosuisse >>>

German Quality Product



Supply format

REMS Power-Press Basic-Pack. Electro-hydraulic radial press with switch-off signal for producing pressing joints $\varnothing$ 10–108 (110) mm, $\varnothing$ $\frac{3}{8}$ –4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing chains. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50–60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. In sturdy steel case.

	Art.-No.	
	577011	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS Power-Press Drive Unit	577001	
REMS pressing tongs/pressing rings see page 156–176.		
REMS cropping tongs for threaded rods see page 179.		
REMS cable shear for electric cable see page 179.		
Steel case with insert	570280	



REMS Power-Press ACC

Electro-hydraulic radial press with automatic retraction

Universal, handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints $\varnothing$ 10–108 (110) mm
 $\varnothing$ $\frac{3}{8}$ –4"

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 156–176.

REMS Power-Press ACC – universal up to $\varnothing$ 110 mm. With automatic circuit control. Secure crimping in seconds. Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses (except for REMS Mini-Press ACC, REMS Mini-Press 22 V ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection (**Patent DE 101 01 440, Patent EP 1 223 008, Patent US 6,739,172**) and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 156–176). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect systemconformity, safe press jointing.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Ideal weight distribution for single handed operation. Ergonomically designed housing with recessed grip. Swivelling pressing tongs/adaptor tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).


Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with proven universal motor 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.



Tested by electrosuisse >>>

German Quality Product

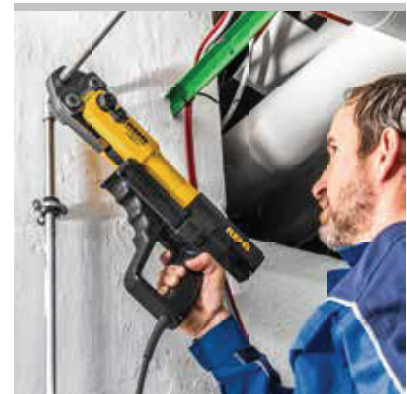

Info

Supply format

REMS Power-Press ACC Basic-Pack. Electro-hydraulic radial press with automatic retraction for producing pressing joints $\varnothing$ 10–108 (110) mm, $\varnothing$ $\frac{3}{8}$ –4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50–60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. In sturdy steel case.

	Art.-No.	
	577010	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS Power-Press ACC Drive Unit	577000	
REMS pressing tongs/pressing rings see page 156–176.		
REMS cropping tongs for threaded rods see page 179.		
REMS cable shear for electric cable see page 179.		
Steel case with insert	570280	



REMS Power-Press XL ACC

Electro-hydraulic radial press with automatic retraction

Universal, powerful power tool with automatic circuit control for making press joints of all common press fitting systems.

Pipe pressing joints $\varnothing$ 10–108 (110) mm
 $\varnothing$ $\frac{3}{8}$ –4"

Complete range of REMS pressing tongs/pressing rings/pressing rings XL for all common pressfitting systems, see page 156–176.

REMS Power-Press XL ACC – universal up to $\varnothing$ 110 mm. Pressing up to $\varnothing$ 110 mm in just one action. Ultra-fast, e.g. Geberit Mapress STAINLESS STEEL $\varnothing$ 108 mm in only 15 seconds. With automatic circuit control. Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses (except for REMS Mini-Press ACC, REMS Mini-Press 22 V ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection (**Patent DE 101 01 440, Patent EP 1 223 008, Patent US 6,739,172**) and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings/pressing rings XL for all common pressfitting systems (page 156–176). Highly durable pressing tongs/XL pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings/pressing rings XL are system-specific and correspond to the respective pressfitting system. Thus perfect systemconformity, safe press jointing.

Design


Compact, robust, job site-proven. Small in size, slender design, drive unit only 5.5 kg. Long working stroke for pressings in a single action, ideal for large dimensions. Ultra-fast, e.g. Geberit Mapress STAINLESS STEEL $\varnothing$ 108 mm in only 15 seconds. Ergonomically designed housing with soft grip and recessed handle. Swivelling pressing tongs/adaptor tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings. Adjustable hand guard.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with proven universal motor 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.



German Quality Product

Tested by electrosuisse >>>



Info

Supply format

REMS Power-Press XL ACC Basic-Pack. Electro-hydraulic radial press with automatic retraction for producing pressing joints $\varnothing$ 10–108 (110) mm, $\varnothing$ $\frac{3}{8}$ –4". For driving REMS pressing tongs/pressing rings/pressing rings XL and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50–60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. In transport case.

	Art.-No.	
	579010	

Other voltages on request.

Accessories

Description	Art.-No.	
REMS Power-Press XL ACC drive Unit	579000	
Adapter tongs Z6 XL for driving REMS pressing rings XL 64,0–108,0 (PR-3S)	579120	
Adapter tongs for other REMS pressing rings see page 176.		
REMS pressing tongs/pressing rings/pressing rings XL see page 156–176.		
REMS cropping tongs for threaded rods see page 179.		
REMS cable shear for electric cable see page 179.		
Transport case with inlays and practical carrying handles	579240	





REMS Akku-Press

Cordless radial press with switch-off signal

Universal, handy electric tool with switch-off signal for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints $\varnothing$ 10–108 (110) mm / $\varnothing$ $\frac{3}{8}$ –4

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 156–176.

REMS Akku-Press – universal up to $\varnothing$ 110 mm.

Secure crimping in seconds.

Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses (except for REMS Mini-Press ACC, REMS Mini-Press 22V ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection (**Patent DE 101 01 440, Patent EP 1 223 008, Patent US 6,739,172**) and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 156–176). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing.

Design

Compact, handy, light. Drive unit with battery only 4.3 kg. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. Integrated LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adaptor tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. Acoustic signal after successful completion of pressing operation. The pressing tongs remain in a closed position until reset button is pushed and releases. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 3.0 Ah capacity, for long service life. Powerful and light. Li-Ion 14.4 V, 3.0 Ah battery for approx. 270 pressings Viega Profipress DN 15 per battery charge. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V/14.4 V voltage supply for mains operation 230 V instead of Li-Ion battery 14.4 V, as accessory.

Supply format

REMS Akku-Press Basic-Pack. Cordless radial press with switch-off signal for producing pipe pressing joints $\varnothing$ 10–108 (110) mm, $\varnothing$ $\frac{3}{8}$ –4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Integrated LED work light. Battery Li-Ion 14.4 V, 3.0 Ah, rapid charger Li-Ion/Ni-Cd 230 V or 110 V, 50–60 Hz, 65 W. In sturdy steel case.

	Art.-No.
	571013

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs/pressing rings see page 156–176.	
REMS cropping tongs for threaded rods see page 179.	
REMS cable shear for electric cable see page 179.	
REMS Akku-Press drive unit , without battery	571003
Battery Li-Ion 14.4 V, 3.0 Ah	571555
Rapid charger Li-Ion/Ni-Cd 230 V , 50–60 Hz, 65 W	571560
Voltage supply Li-Ion 230 V/14.4 V for mains operation 230 V instead of battery Li-Ion 14.4 V.	571565
Steel case with inlay	571290
REMS cordless LED lamp see page 97	175200



Tested by electrosuisse >>>

German Quality Product

REMS TECHNOLOGY
LI-ION PLUS

International
Design Award

LED



REMS Akku-Press ACC

Cordless radial press with automatic circuit control

Universal, handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints $\varnothing$ 10–108 (110) mm / $\varnothing$ $\frac{3}{8}$ –4

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 156–176.

REMS Akku-Press ACC – universal up to $\varnothing$ 110 mm. With automatic circuit control. Secure crimping in seconds. Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses (except for REMS Mini-Press ACC, REMS Mini-Press 22 V ACC) and radial presses of other makes.

All pressing tongs marked by a * have another connection (**Patent DE 101 01 440, Patent EP 1 223 008, Patent US 6,739,172**) and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 156–176). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect systemconformity, safe press jointing.

Design

Compact, handy, light. Drive unit with battery only 4.3 kg. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. Integrated LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adaptor tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 3.0 Ah capacity, for long service life. Powerful and light. Li-Ion 14.4 V, 3.0 Ah battery for approx. 270 pressings Viega Profipress DN 15 per battery charge. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger for short charging times. Li-Ion 230 V/14.4 V voltage supply for mains operation 230 V instead of Li-Ion battery 14.4 V, as accessory.

Supply format

REMS Akku-Press ACC Basic-Pack. Cordless radial press with automatic circuit control for producing pipe pressing joints $\varnothing$ 10–108 (110) mm, $\varnothing$ $\frac{3}{8}$ –4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. Integrated LED work light. Battery Li-Ion 14.4 V, 3.0 Ah, rapid charger Li-Ion/Ni-Cd 230 V or 110 V, 50–60 Hz, 65 W. In sturdy steel case.

	Art.-No.
	571014

Other voltages on request.

Accessories

Description	Art.-No.
REMS pressing tongs/pressing rings see page 156–176.	
REMS cropping tongs for threaded rods see page 179.	
REMS cable shear for electric cable see page 179.	
REMS Akku-Press ACC drive unit, without battery	571004
Battery Li-Ion 14.4 V, 3.0 Ah	571555
Rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W	571560
Voltage supply Li-Ion 230 V/14.4 V for mains operation 230 V instead of battery Li-Ion 14.4 V.	571565
Steel case with inlay	571290
REMS cordless LED lamp see page 97	175200




Tested by electrosuisse >>>

German Quality Product

REMS TECHNOLOGY
LI-ION PLUS

International
Design Award

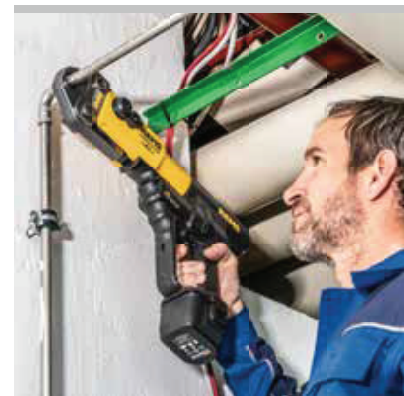

for all common pressfitting systems

Select REMS pressing tongs/ REMS pressing rings yourself!

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the pressing tongs/pressing rings which are highlighted in yellow in the table. Intermediate tongs (page 176) are necessary for driving the REMS pressing rings (PR).

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Drive through all REMS radial presses (except for REMS Mini-Press ACC, REMS Mini-Press 22V ACC and REMS Mini-Press S 22V ACC) and suitable radial presses of other makes. All pressing tongs marked with * have an optional connection (Patent DE 101 01 440, Patent EP 1 223 008, Patent US 6,739,172) for manual drive through the radial press REMS Eco-Press. Read and follow the installation and assembly instructions of the system provider/manufacturer.

REMS pressing tongs

REMS pressing tongs with 2 swivellable monoblock pressing jaws. Most sold standard version. REMS ACz, Fz, RFz, RFlz, VMPz pressing tongs with teeth prevent formation of burr on the pressing sleeve (Patent EP 2 027 971).

REMS pressing tongs (4G)

REMS pressing tongs (4G) with two pivoted, parallel aligned pressing segments for linear pressing of midsize dimensions.

REMS pressing tongs (S)

REMS pressing tongs (S) with one fixed and two pivoted pressing segments, for midsize dimensions. REMS VMPz pressing tongs with teeth prevent formation of burr on the pressing sleeve.

REMS pressing rings (PR-3S)

REMS pressing ring (PR-3S) with 3 pressing segments, 2 swivel guided, for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments, with adaptor tongs.

REMS pressing rings (PR-3B)

REMS pressing rings (PR-3B) with 3 pressing segments for high quality, large dimension pressings Optimum pressing by radially controlled movement of the pressing segments with adaptor tongs. REMS VAUFz, VFz, VMPz, VUSFz pressing rings with teeth prevent formation of burr on the pressing sleeve.

REMS pressing rings 45° (PR-2B)

REMS pressing ring 45° (PR-2B), with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access by 45° inclination (Patent EP 2 774 725). Drive with adaptor tongs.

Traceability according to EN 1775:2007

REMS pressing tongs/pressing rings with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs or the suitable pressing ring have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.

Hold-Harmless and Indemnification Agreement

See page 178.

Confirmation of suitability


See page 177.



German Quality Product



with 2 swivellable monoblock pressing jaws. Most sold



REMS pressing tongs (4G)




REMS pressing tongs (S)




REMS pressing rings (PR-3S)



REMS pressing rings (PR-3B)



REMS pressing rings 45° (PR-2B)
Patent EP 2 774 725

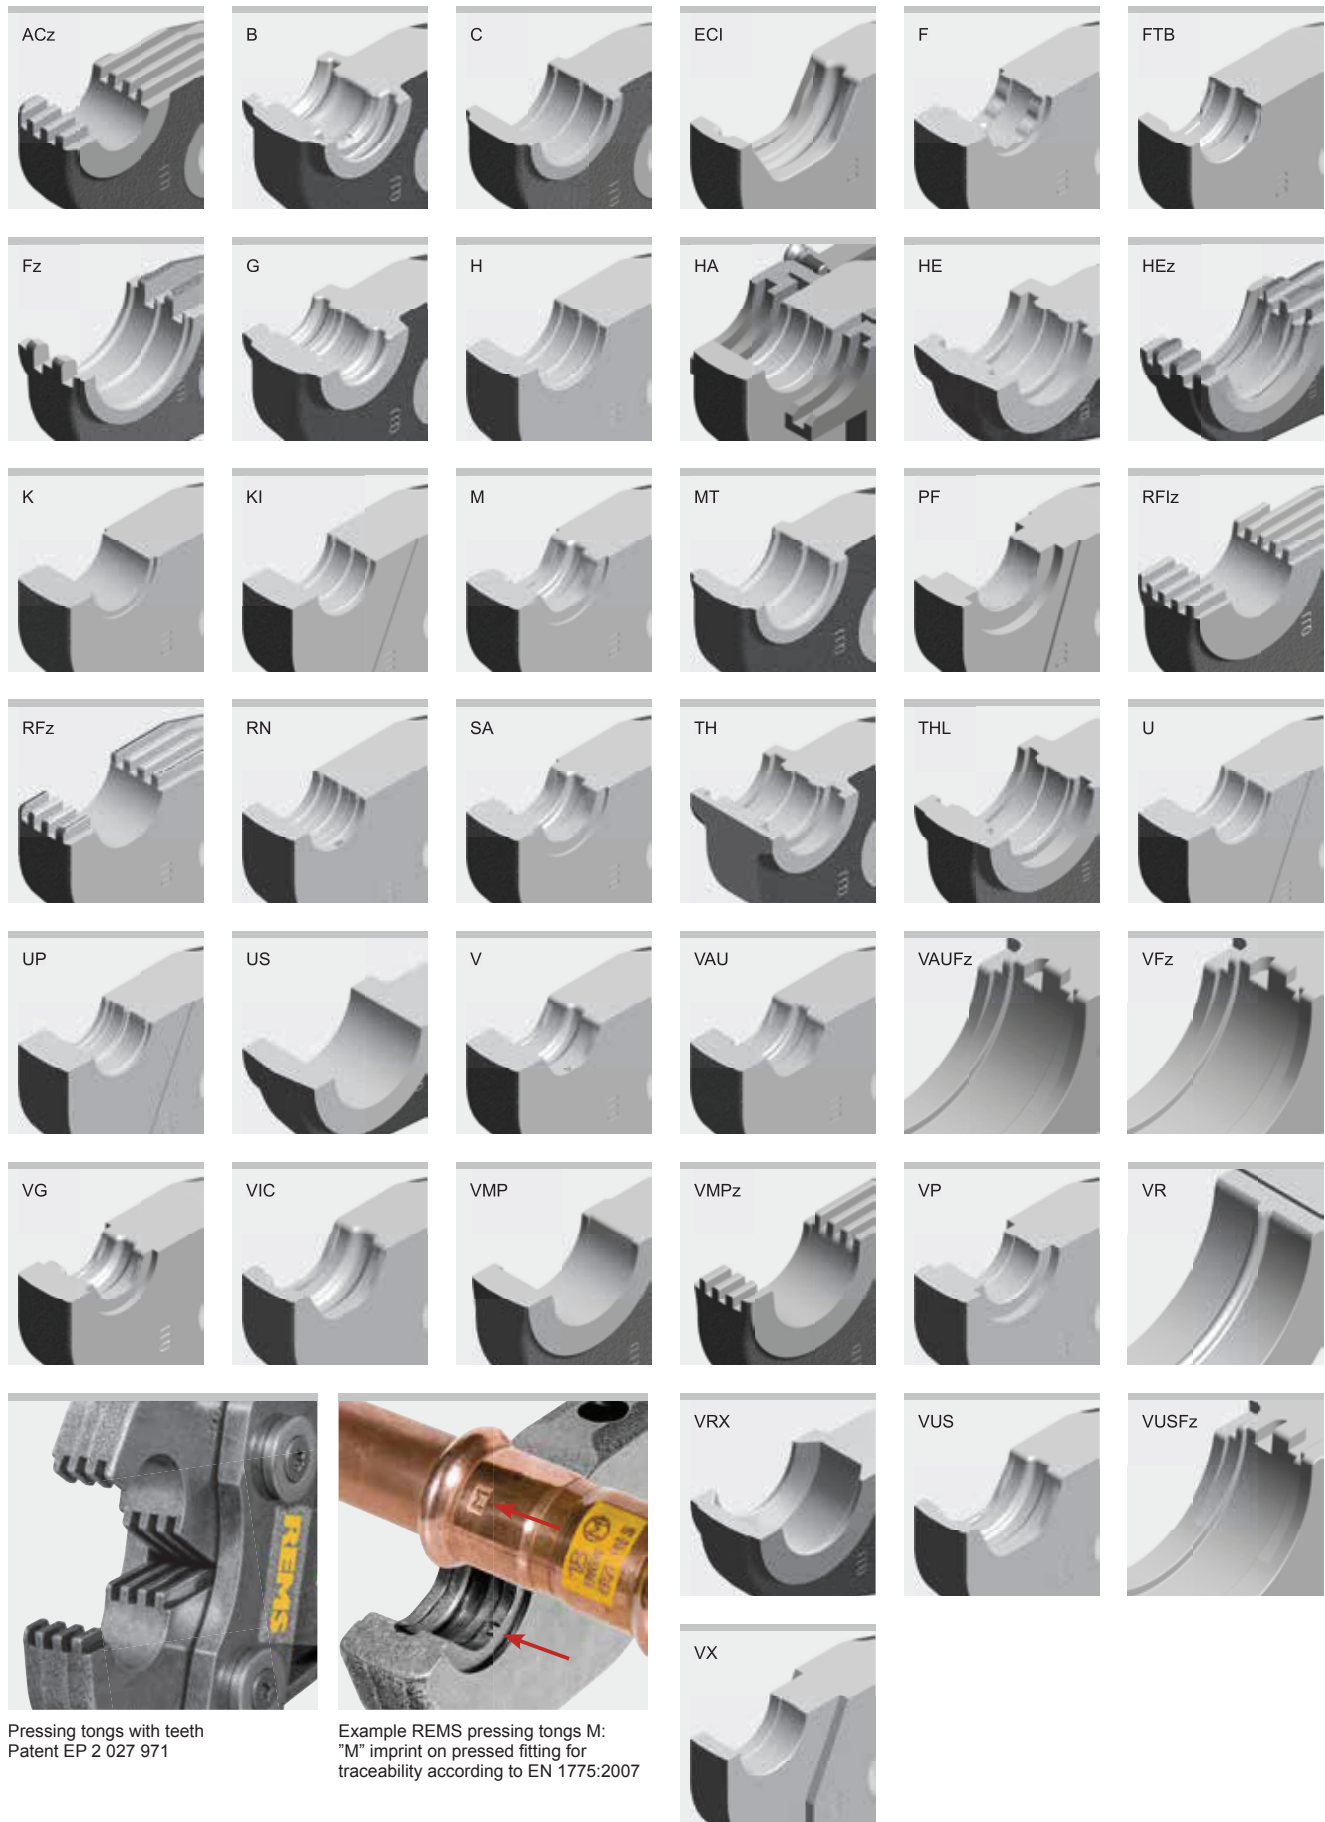

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
A		
AC-FIX PRESS (Global Piping Systems)	H 12"	570300
	H 16"	570320
	H 20"	570350
	H 25"	570360
	H 32	570380
	RFz 12"	571320
	RFz 16"	571325
	RFz 20"	571330
	RFz 25	571335
	RFz 32	571340
	RFz 32	571340
	U 16"	570765
	U 20"	570775
	U 25"	570780
AC-FIX PRESS DUO (Global Piping Systems)	U 32	570785
	VX 16"	571635
	VX 20"	571640
	RFz 16"	571325
	RFz 20"	571330
	RFz 25	571335
	RFz 32	571340
	TH 16"	570460
	TH 20"	570470
	TH 25"	570495
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
AC-FIX PRESS-MULTI (Global Piping Systems)	U 25"	570780
	U 32	570785
	H 16"	570320
	H 18"	570340
	H 20"	570350
	H 25"	570360
	H 32	570380
	RFz 16"	571325
	RFz 20"	571330
	RFz 25	571335
	RFz 32	571340
	U 16"	570765
	U 18"	570770
	U 20"	570775
ACOME ACOPEX ALU	U 25"	570780
	U 32	570785
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
	U 32	570785
ACOME MT	ACz 12"	572642
	ACz 16"	572644
	ACz 20"	572646
	ACz 25	572648
AHLSELL A-press elförzinkad	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
AHLSELL A-press koppar	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

System	Pressing contour	Art.-No.
AHLSELL A-press rostfritt	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
AIRBEL PRESSCLIM	M 35 45° (PR-2B) ³⁾	574530
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
AIRBEL SERTINOX	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
ALB Sistema Multicapa	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	H 16"	570320
	H 18"	570340
	H 20"	570350
ALB Sistema Multicapa Gas	H 26"	570370
	H 32	570380
	H 40 (4G)	570390
	U 16"	570765
	U 18"	570770
	U 20"	570775
	C 26"	570750
	U 32	570785
	U 40	570790
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	H 16"	570320
APE Serie AP	H 20"	570350
	H 26"	570370
	H 32	570380
	U 16"	570765
	U 20"	570775
	C 26"	570750
	U 32	570785
	B 16"	570850
	B 20"	570860
	B 26	570870
	B 32	570880
	H 16"	570320
	H 20"	570350
	H 26"	570370
APE Serie AP Gas	H 32	570380
	U 16"	570765
	U 20"	570775
	C 26"	570750
	U 32	570785
	B 16"	570850
	B 20"	570860
	B 26	570870
	B 32	570880
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480

System	Pressing contour	Art.-No.
AQUATECHNIK Universal	B 16"	570850
	B 20"	570860
	B 26	570870
	B 32	570880
	F 16"	570717
	F 20"	570727
	F 26"	570730
	F 32	570735
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16"	570320
	H 20"	570350
ARKA DUROsystem	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
	C 26"	570750
	U 32	570785
	H 16"	570320
	H 20"	570350
	H 25"	570360
	H 26"	570370
ASCHL NIR	H 32	570380
	TH 16"	570460
	TH 20"	570470
	TH 25"	570495
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
	U 25"	570780
	U 32	570785
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
ASSOTHERM IPC-RAC Carbon Steel	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 15	570110
	M 18	570120
	M 22	570130
ASSOTHERM IPI-RAX Inox	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 15	570110
	M 18	570120
	M 22	570130
ASSOTHERM IPM-Multistrato	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	THL 32	570487
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16"	570765
	U 20"	570775
	C 26"	570750
	U 32	570785

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
ASSOTHERM	M 15	570110
IPR-RRA	M 18	570120
Copper	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
ASSOTHERM	M 15	570110
IPR-RRA	M 18	570120
Copper Gas	M 22	570130
	M 28	570140
	M 35	570150
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US ¾"	571450
	US ½"	571455
	US ¾"	571460
	US 1"	571465
	US 1 ¼"	571470
	US 1 ½"	571475
	US 2"	571477
B		
Bampi BALPEX (serie MP)	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Bampi BALPEX Gas	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
BARBI EASYPRESS (Industrial Blansol)	H 12"	570300
	H 16"	570320
	H 20"	570350
	H 25"	570360
	H 32	570380
	RFz 12"	571320
	RFz 16"	571325
	RFz 20"	571330
	RFz 25	571335
	RFz 32	571340
	U 16"	570765
	U 20"	570775
	U 25"	570780
	U 32	570785
BARBI MULTIPEX (Industrial Blansol)	H 14"	570310
	H 16"	570320
	H 18"	570340
	H 20"	570350
	H 25"	570360
	H 26"	570370
	H 32	570380
	RFz 16"	571325
	RFz 18"	571327
	RFz 20"	571330
	RFz 25	571335
	RFz 32	571340
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365

System	Pressing contour	Art.-No.
BEGETUBE/ IVAR	B 14"	570845
	B 16"	570850
	B 18"	570855
	B 20"	570860
	B 26	570870
	B 32	570880
	Fz 40	570742
	Fz 50	570747
	F 63 (S)	572385
	Fz 75 (PR-3B) ³⁾	572830
BRASELI GPF GAS	TH 16"	570460
	TH 20"	570470
	TH 25"	570495
	TH 32	570480
BRASELI Pressfitting PE-X	RFz 16"	571325
	RFz 20"	571330
	RFz 25	571335
	RFz 32	571340
BRASELI Pressfitting Multicapa	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	U 50	570795
Brass Form Master Press	H 16"	570320
	H 18"	570340
	H 20"	570350
	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	U 16"	570765
	U 18"	570770
	U 20"	570775
Brass & Fittings PRESSMAN MultiPress	RFz 16"	571325
	RFz 18"	571327
	ACz 20"	572646
	RFz 25	571335
	RFz 32	571340
Brass & Fittings PRESSMAN RetiPress	RFz 16"	571325
	RFz 18"	571327
	ACz 20"	572646
	RFz 25	571335
	RFz 32	571340
BRASSTECH MULTitermoSAN Brasspress	B 16"	570850
	B 20"	570860
	B 26	570870
	B 32	570880
	F 16"	570717
	F 20"	570727
	F 26"	570730
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	H 16"	570320
	H 18"	570340
	H 20"	570350
	H 26"	570370
	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 32	570785
C		
Cello Products >B< Press	VUS ½" (OD 15,9mm)	571770
	VUS ¾" (OD 22,2mm)	571775
	VUS 1" (OD 28,6mm)	571780
	VUS 1 ¼" (OD 34,9mm)	571785
	VUS 1 ½" (OD 41,3mm)	571790
	VUS 2" (OD 54,0mm)	571795

System	Pressing contour	Art.-No.
CHIALI	TH 16"	570460
CHIALIPEX	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Climatek	TH 14"	570455
Clima Therm	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	H 40 A (4G)	570695
Climatrix	H 16"	570320
Climatrix Rhinopex	H 20"	570350
	U 16"	570765
	U 20"	570775
	TH 14"	570455
	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
ClouSet	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
Comap	RFz 12"	571320
PEX Press	RFz 16"	571325
	RFz 20"	571330
	RFz 25	571335
Comap	TH 14"	570455
Multiskin	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 26"	570475
	THL 32	570487
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Comap	TH 16"	570460
Multiskin Gas	TH 20"	570470
	TH 26"	570475
	THL 32	570487
COMISA	TH 14"	570455
Press System	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 25"	570495
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	H 14"	570310
	H 16"	570320
	H 18"	570340
	H 20"	570350
	H 26"	570370
	H 32	570380
	B 14"	570845
	B 16"	570850
	B 18"	570855
	B 20"	570860
	B 26	570870
	B 32	570880
COMISA	TH 16"	570460
Press System Gas	TH 20"	570470
	TH 26"	570475
	TH 32	570480

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- Adapter tongs are required for driving pressing rings (PR), see page 176.
- Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.
- For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- Driven by REMS Power-Press XL.

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2018. For the updated situation regarding suitability status check our website:
www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
CONEL CONNECT MULTI	F 16"	570717
	F 20"	570727
	F 26"	570730
	F 32	570735
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
	U 25"	570780
	U 32	570785
(DN 26)	VP 16"	570910
	VP 20"	570915
	VP 32	570925

D

DIWAsystems	TH 14"	570455
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
DUOFIL MKSYSTEM	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 32	570785
DW Verbundrohr multitubo systems	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828

E

EBRILLE Isomonflex	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
	H 26"	570370
	TH 26"	570475
	U 32	570785
EBRILLE Moniflex	U 14"	570760
	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
	H 26"	570370
	TH 26"	570475
	U 32	570785
	U 40	570790
	U 50	570795
EFFEBI PRESSTIGE	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
EFFEBI TOF-GAS MULTIPINZA	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	H 40 (4G)	570390
	U 16"	570765
	U 20"	570775
	U 32	570785

EFFEBI TOF MULTIPINZA	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	F 16"	570717
	F 18"	570720
	F 20"	570727
	F 26"	570730
	F 32	570735
	Fz 40	570742
	Fz 50	570747
	F 63 (S)	572385
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16"	570320
	H 18"	570340
	H 20"	570350
	H 26"	570370
	H 32	570380
	H 40 (4G)	570390
	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
EFIELD MULTILAYER PRESS DINGAS	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	B 16"	570850
	B 18"	570855
	B 20"	570860
	B 26	570870
	B 32	570880
	U 16"	570765
	U 18"	570770
	U 20"	570775
EFIELD MULTILAYER PRESS WATER	U 25"	570780
	U 32	570785
Elkhart APOLLOXPRESS Fittings Copper and Low-Lead Brass	VUS ½" (OD 15,9 mm)	571770
	VUS ¾" (OD 22,2 mm)	571775
	VUS 1" (OD 28,6 mm)	571780
	VUS 1½" (OD 34,9 mm)	571785
	VUS 1¾" (OD 41,3 mm)	571790
	VUS 2" (OD 54,0 mm)	571795
	VUSFz 2½" (PR-3B) ³⁾	572819
	(OD 66,7 mm)	
	VUSFz 3" (PR-3B) ³⁾	572820
	(OD 79,4 mm)	
Elkhart APOLLOXPRESS LD-C Fittings Copper	VUSFz 4" (PR-3B) ³⁾	572821
	(OD 104,8 mm)	
EMMETI GERPEX- FIVPRESS	B 16"	570850
	B 20"	570860
	B 26	570870
	B 32	570880
	H 16"	570320
	H 20"	570350
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16"	570765
	U 20"	570775
EMPUR	TH 14"	570455
	TH 15"	570457
	TH 16"	570460
	TH 17"	570462
	TH 20"	570470
	TH 25"	570495
EURACCORDI SYCPRESS STAINLESS STEEL PRESS FITTINGS	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530

EURACCORDI SYCPRESS CARBON STEEL PRESS FITTINGS	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
EUROTUBI EUROPA C-Steel Pressfitting System M-Profile ¹⁾	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
EUROTUBI EUROPA Inox Pressfitting System M-Profile ¹⁾	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Evans Components Presslok	VAU 15 (½")	572687
	VAU 20 (¾")	572689
	VAU 25 (1")	572691
	ECI 1½"	571932
	ECI 2" (4G)	571934
	ECI 2½" XL (PR-3S) ^{3) 7)}	579104
	ECI 3" XL (PR-3S) ^{3) 7)}	579105
	ECI 4" XL (PR-3S) ^{3) 7)}	579106

F

FAR Rubinetterie PRESSFAR	TH 14"	570455
	TH 16"	570460
	TH 17"	570462
	TH 18"	570465
	TH 20"	570470
	TH 25"	570495
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	H 14"	570310
	H 16"	570320
	H 18"	570340
	H 20"	570350
	H 26"	570370
	H 32	570380
	H 40 (4G)	570390
	U 14"	570760
	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
F.B.Q. BARONIO BQ press	V 12	570107
	V 14	570112
	V 15	570115
	V 16	570117
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 14 45° (PR-2B) ³⁾	574532
	V 15 45° (PR-2B) ³⁾	574504
	V 16 45° (PR-2B) ³⁾	574534
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
F.B.Q. BARONIO BQ press carbon steel	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
F.B.Q. BARONIO BQ press gas	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
Fercofloor DUO Press FERCO PEX	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
	TH 16*	570460
	TH 20*	570470
Fercofloor DUO Press MULTIFER	TH 25*	570495
	TH 32	570480
	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
FILINOX Filpress	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	FTB 15	571432
	FTB 18	571434
	FTB 22	571436
	FTB 28	571438
	M 42 (PR-3S) ³⁾	572706
FILINOX Instalpress Steel	M 54 (PR-3S) ³⁾	572708
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
FILINOX Instalpress Inox	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
Fittings Estándar ECO-PRESS	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
	RFz 32	571340

System	Pressing contour	Art.-No.	
Fittings Estándar MULTICAPA	RFz 16*	571325	
	RFz 18*	571327	
	RFz 20*	571330	
	RFz 25	571335	
	RFz 32	571340	
Fittings Estándar PE-X	RFz 16*	571325	
	RFz 20*	571330	
	RFz 25	571335	
	RFz 32	571340	
FOHS	TH 16*	570460	
HEIZTECHNIK FOHSPRESS	TH 20*	570470	
	TH 26*	570475	
	TH 32	570480	
FORNARA	B 16*	570850	
ForPress	B 20*	570860	
	B 26	570870	
	B 32	570880	
	F 16*	570717	
	F 20*	570727	
	F 26*	570730	
	F 32	570735	
	F 16 45° (PR-2B) ³⁾	574550	
	F 20 45° (PR-2B) ³⁾	574552	
	F 26 45° (PR-2B) ³⁾	574554	
	F 32 45° (PR-2B) ³⁾	574556	
	H 16*	570320	
	H 20*	570350	
	H 26*	570370	
	H 32	570380	
	TH 16*	570460	
	TH 20*	570470	
	TH 26*	570475	
	TH 32	570480	
	U 16*	570765	
U 20*	570775		
U 32	570785		
FRABO CHROMEPRESS	V 12	570107	
	V 15	570115	
	V 18	570125	
	V 22	570135	
	V 12 45° (PR-2B) ³⁾	574502	
	V 15 45° (PR-2B) ³⁾	574504	
	V 18 45° (PR-2B) ³⁾	574506	
	V 22 45° (PR-2B) ³⁾	574508	
FRABO	V 12	570107	
FRABOPRESS	V 15	570115	
	V 18	570125	
C-STEEL	V 12	570135	
	V 28	570145	
Securfrabo	V 35	570155	
	V 42	570165	
	V 54	570175	
	M 76,1 XL (PR-3S) ^{3) 7)}	579101	
	M 88,9 XL (PR-3S) ^{3) 7)}	579102	
	M 108,0 XL (PR-3S) ^{3) 7)}	579103	
	V 12 45° (PR-2B) ³⁾	574502	
	V 15 45° (PR-2B) ³⁾	574504	
	V 18 45° (PR-2B) ³⁾	574506	
	V 22 45° (PR-2B) ³⁾	574508	
	V 28 45° (PR-2B) ³⁾	574510	
	V 35 45° (PR-2B) ³⁾	574512	
	FRABO	V 12	570107
	FRABOPRESS	V 15	570115
V 18		570125	
316 SECURFRABO	V 22	570135	
	V 28	570145	
	V 35	570155	
	V 42	570165	
	V 54	570175	
	M 76,1 XL (PR-3S) ^{3) 7)}	579101	
	M 88,9 XL (PR-3S) ^{3) 7)}	579102	
	M 108,0 XL (PR-3S) ^{3) 7)}	579103	
	V 12 45° (PR-2B) ³⁾	574502	
	V 15 45° (PR-2B) ³⁾	574504	
	V 18 45° (PR-2B) ³⁾	574506	
	V 22 45° (PR-2B) ³⁾	574508	
	V 28 45° (PR-2B) ³⁾	574510	
	V 35 45° (PR-2B) ³⁾	574512	

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
Fränkische alpex-duo	B 16"	570850
	B 18"	570855
	B 20"	570860
	B 26	570870
	B 32	570880
	F 16"	570717
	F 18"	570720
	F 20"	570727
	F 26"	570730
	F 32	570735
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
Fränkische alpex F50 PROFIL	F 16"	570717
	F 20"	570727
	F 26"	570730
	F 32	570735
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
	U 25"	570780
	U 32	570785
Fränkische alpex-gas ²⁾	F 20 ²⁾	570727
	F 26 ²⁾	570730
	F 32 ²⁾	570735
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	Fz 40	570742
	Fz 50	570747
	F 63 (S)	572385
	Fz 75 (PR-3B) ³⁾	572830
G		
gabotherm H+S	TH 10"	570467
	TH 12"	570452
	TH 14"	570455
	TH 15"	570457
	TH 16"	570460
	TH 17"	570462
	TH 18"	570465
	TH 20"	570470
	TH 25"	570495
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Gallagher USA YogaPipe ACR	H 12" (1/4")	570300
	U 14" (3/4")	570760
	U 16" (1/2")	570765
	U 18" (5/8")	570770
	U 20" (3/4")	570775
	U 25" (1/4")	570780
Geberit Mapress C-STÄHL	U 32 (1 1/4")	570785
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 35 (PR-3S) ³⁾	572727
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530

System	Pressing contour	Art.-No.
Geberit Mapress EDELSTAHL	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 35 (PR-3S) ³⁾	572727
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Geberit Mapress EDELSTAHL Gas	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Geberit Mapress KUPFER	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 35 (PR-3S) ³⁾	572727
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Geberit Mapress KUPFER Gas	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Geberit Mepla	G 16"	570400
	G 20"	570410
	G 26"	570420
	G 32	570430
	G 40	570440
	G 50	570450
Geberit Mepla Therm	G 63 (S)	572470
	G 16"	570400
Geberit Mepla Therm	G 20"	570410
	G 26"	570420
Geberit Volex	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
General Fittings ST00	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
General Fittings ST00	U 32	570785

System	Pressing contour	Art.-No.
General Fittings Serie SS00	B 16"	570850
	B 18"	570855
	B 20"	570860
	B 26	570870
	B 32	570880
	F 16"	570717
	F 20"	570727
	F 26"	570730
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	H 16"	570320
	H 18"	570340
	H 20"	570350
	H 25"	570360
	H 26"	570370
	H 32	570380
	H 40 (4G)	570390
	TH 16"	570460
	TH 18"	570465
General Fittings Trident	TH 20"	570470
	TH 25"	570495
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	U 63 (PR-3B) ³⁾	572837
General Fittings Trident	B 16"	570850
	B 20"	570860
	B 26	570870
	B 32	570880
	F 16"	570717
	F 20"	570727
	F 26"	570730
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
General Fittings Trident Gas	U 32	570785
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
	U 32	570785
Giacomini Raccordi RM Giacomini	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 20"	570470
Giacomini RM MULTIGAS	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
	U 32	570785
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
Giacomini RM MULTIGAS	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
	U 32	570785

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
Giacomini	V 15	570115
Valvole Giacomini	V 18	570125
serie R850V	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Golan Pipe Systems (Scandinavia)	U 16*	570765
Alu-Press	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	U 63 (PR-3B) ³⁾	572837
	U 75 (PR-3B) ³⁾	572828
Grinnell G-PRESS Copper Fittings	VUS ½" (OD 15,9 mm)	571770
	VUS ¾" (OD 22,2 mm)	571775
	VUS 1" (OD 28,6 mm)	571780
	VUS 1½" (OD 34,9 mm)	571785
	VUS 1½" (OD 41,3 mm)	571790
	VUS 2" (OD 54,0 mm)	571795
	VUSFz 2½" (PR-3B) ³⁾	572819
	(OD 66,7 mm)	
	VUSFz 3" (PR-3B) ³⁾	572820
	(OD 79,4 mm)	
	VUSFz 4" (PR-3B) ³⁾	572821
	(OD 104,8 mm)	
GS Wärmesysteme System TH	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
GS Wärmesysteme System V	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
H		
HakaGerodur	TH 10*	570467
HakaGerodur-System	TH 11,6*	570482
	TH 12*	570452
	TH 14*	570455
	TH 16*	570460
	TH 17*	570462
	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405

System	Pressing contour	Art.-No.
HASTINIK	M 15	570110
Hastinik/Hilpress	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
heima-press	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
HELIROMA Klimapress	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
HELIROMA romapress	Rfz 16*	571325
	Rfz 20*	571330
	Rfz 25	571335
	Rfz 32	571340
Henco	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	HE 32	571900
	HEz 40	571904
Herotec	H 16*	570320
TEMPUS-PRESS PLUS	H 20*	570350
	H 25*	570360
	H 32	570380
	Rfz 16*	571325
	Rfz 20*	571330
	Rfz 25	571335
	Rfz 32	571340
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	U 63 (PR-3B) ³⁾	572837
	U 75 (PR-3B) ³⁾	572828
Herz PIPEFIX	TH 10*	570467
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	THz 75 (PR-3B) ³⁾	572829
HIDRONIX MULTIGAS	TH 16*	570460
	TH 20*	570470
	TH 26*	570475

System	Pressing contour	Art.-No.
HIDRONIX	TH 14*	570455
MULTIPIPE	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	H 14*	570310
	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 14*	570760
	U 16*	570765
	U 18*	570770
	U 20*	570775
	C 26*	570750
	U 32	570785
HIDRONIX UNICO	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	H 14*	570310
	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 14*	570760
	U 16*	570765
	U 18*	570770
	U 20*	570775
	C 26*	570750
	U 32	570785
HITEC Sistema Multistrato	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
hp praski BAVARIA-press	TH 10*	570467
	TH 14*	570455
	TH 16*	570460
	TH 17*	570462
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
I		
IBP >B< Flex	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
IBP >B< Press	V 12	570107
	V 14	570112
	V 15	570115
	V 16	570117
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 14 45° (PR-2B) ³⁾	574532
	V 15 45° (PR-2B) ³⁾	574504
	V 16 45° (PR-2B) ³⁾	574534
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- Adapter tongs are required for driving pressing rings (PR), see page 176.
- Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.
- For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- Driven by REMS Power-Press XL.

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2018. For the updated situation regarding suitability status check our website:
www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
IBP >B< Press Carbon	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
IBP >B< Press Gas	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
IBP >B< Press Inox	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
IBP >B< Press Solar	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
IBP >B< Press XL	XP 64,0 XL (PR-3S) ^{3) 7)}	579100
	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
ICMA Sempiter	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16*	570765
	U 20*	570775
	U 32	570785
	U 40	570790
	U 50	570795
ICMA Sempigas	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
Idrosanitaria Bonomi	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
Homegas	TH 16*	570460
	TH 18*	570465
Idrosanitaria Bonomi	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Idropress	TH 16*	570460
	TH 18*	570465

System	Pressing contour	Art.-No.
IDROSISTEMI Ta-Press	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	F 16*	570717
	F 20*	570727
	F 26*	570730
	F 32	570735
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	Fz 40	570742
	Fz 50	570747
	F 63 (S)	572385
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
	U 16*	570765
	U 20*	570775
	C 26*	570750
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	B 16*	570850
	B 20*	570860
	B 26	570870
	B 32	570880
IDROTRADE Storm Multipinza	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
IDROTRADE Storm Multistrato	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	U 16*	570765
	U 20*	570775
	U 40	570790
	U 50	570795
IDROTRADE StormPRES	H 14*	570310
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	M 15	570110
	M 18	570120
IDROTRADE StormSTEEL	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
ILTA INOX/CHIBRO Pressfitting Cuni	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
ILTA INOX/CHIBRO Pressfitting inox	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 15	570110
	M 18	570120

System	Pressing contour	Art.-No.
IPA IPANA Press	TH 10*	570467
	TH 11,6*	570462
	TH 12*	570452
	TH 14*	570455
	TH 15*	570457
	TH 16*	570460
	TH 17*	570462
	TH 18*	570465
	TH 20*	570470
	TH 22*	570472
	TH 25*	570495
	TH 26*	570475
	TH 28	570477
	TH 32	570480
IPA THu IPANA Press	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	THz 75 (PR-3B) ³⁾	572829
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
IPALPEX (Industrie du Plastique et Accessoires)	TH 32	570480
	TH 40	570485
	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	THL 32	570487
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	K16/P18*	572600
	PF 22*	571980
	K16/P18*	572600
IPLEX PIPELINES AUSTRALIA Iplex K1 (Gas)	K/20*	572605
	K/25*	572610
	K32	572615
	K1/40	572620
	K1/50	572625
	K16/P18*	572600
	K/20*	572605
IPLEX PIPELINES AUSTRALIA Iplex K2	K/25*	572610
	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571337
	RFz 32	571342
	RFz 16*	571325
	RFz 20*	571330
ISOLTUBEX Multicapa	RFz 25	571337
	RFz 32	571342
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
ISOLTUBEX Multicapa GAS	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571337
	RFz 32	571342
ISOTUBI NUMEPRESS	M 15	570110
	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
IVAR Ivar-Press	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
IVAR MULTI PRESS GAS	M 35 45° (PR-2B) ³⁾	574530
	B 14*	570845
	B 16*	570850
	B 18*	570855
	B 20*	570860
	B 26	570870
	B 32	570880
IVAR MULTI PRESS GAS	Fz 40	570742
	Fz 50	570747
	F 63 (S)	572385
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
IVAR MULTI PRESS GAS	TH 40	570485
	B 16*	570850
	B 20*	570860
	B 26	570870
	B 32	570880

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
IVAR MULTI PRESS GAS ITALIA	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 16*	570765
	U 20*	570775
	U 32	570785
	U 32	570785
IVAR Multi Press MP	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	F 16*	570717
	F 18*	570720
	F 20*	570727
	F 26*	570730
	F 32	570735
	Fz 40	570742
	Fz 50	570747
	F 63 (S)	572385
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 25*	570360
	H 26*	570370
	H 32	570380
	H 40 (4G)	570390
	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	C 26*	570750
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	B 16*	570850
	B 18*	570855
	B 20*	570860
	B 26	570870
	B 32	570880
IVAR Multi Press Leak (MPL)	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	F 16*	570717
	F 20*	570727
	F 26*	570730
	F 32	570735
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 16*	570765
	U 20*	570775
	C 26*	570750
	U 32	570785
	B 16*	570850
	B 20*	570860
	B 26	570870
	B 32	570880

System	Pressing contour	Art.-No.
IVAR Plastic Multi Press Leak (PMPL)	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	F 16*	570717
	F 20*	570727
	F 26*	570730
	F 32	570735
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
IVAR Plastic Multi Press PMP	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	F 16*	570717
	F 20*	570727
	F 26*	570730
	F 32	570735
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16*	570320
	H 20*	570350
	H 25*	570360
IVT PRIIPRESS	H 26*	570370
	H 32	570380
	U 16*	570765
	U 20*	570775
	U 25*	570780
	C 26*	570750
	U 32	570785
	B 16*	570850
	B 20*	570860
	B 26	570870
	B 32	570880
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
Jäger - Aquatec Aquapress H	H 14*	570310
	H 16*	570320
	H 17*	570330
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 40	570790
	U 50	570795
	U 63 (S)	572365
Jäger - Aquatec C-Stahl - Press Typ M	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530

System	Pressing contour	Art.-No.
Jäger - Aquatec Edelstahl-Press Typ M	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Jäger - Aquatec Kupfer-Press Typ V	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Jansen JANSEN prima	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Jaraflex- Presssystem	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
JUNGWOO JWPress	VUS ½" (OD 15,9 mm)	571770
	VUS ¾" (OD 22,2 mm)	571775
	VUS 1" (OD 28,6 mm)	571780
	VUS 1¼" (OD 34,9 mm)	571785
	VUS 1½" (OD 41,3 mm)	571790
	VUS 2" (OD 54,0 mm)	571795
	VUSFz 2½" (PR-3B) ³⁾	572819
	(OD 66,7 mm)	
	VUSFz 3" (PR-3B) ³⁾	572820
	(OD 79,4 mm)	
	VUSFz 4" (PR-3B) ³⁾	572821
	(OD 104,8 mm)	
KAN KAN-therm	U 16*	570765
	U 20*	570775
	U 25*	570780
	C 26*	570750
	U 32	570785
	U 40	570790
	TH 50 (S)	572400
	TH 63 (S)	572405

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- Adapter tongs are required for driving pressing rings (PR), see page 176.
- Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.
- For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- Driven by REMS Power-Press XL.

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2018. For the updated situation regarding suitability status check our website:
www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
KAN	U 14*	570760
KAN-therm LBP	U 16*	570765
	U 20*	570775
	U 25*	570780
	C 26*	570750
	U 32	570785
	U 40	570790
	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
KAN	M 15	570110
KAN-therm Inox	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	XP 108,0 XL (PR-3S) ^{3) 7)}	579109
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
KAN	M 15	570110
KAN-therm Steel	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	XP 108,0 XL (PR-3S) ^{3) 7)}	579109
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
KE KELIT KELIT KELOX	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
KE KELIT	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
KE KELIT COPPERFIX Kupfer	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
KE KELIT steelFIX C-Stahl	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530

System	Pressing contour	Art.-No.
KE KELIT steelFIX Edelstahl	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
KEMBLA KemPress (AUS)	VAU 15 (OD 12,7 mm)	572687
	VAU 20 (OD 19,1 mm)	572689
	VAU 25 (OD 25,4 mm)	572691
	VAU 32 (OD 31,8 mm)	572693
	VAU 40 (OD 38,1 mm)	572695
	VAU 50 (OD 50,8 mm)	572697
KEMBLA KemPress Gas (AUS)	VAU 15 (OD 12,7 mm)	572687
	VAU 20 (OD 19,1 mm)	572689
	VAU 25 (OD 25,4 mm)	572691
	VAU 32 (OD 31,8 mm)	572693
	VAU 40 (OD 38,1 mm)	572695
	VAU 50 (OD 50,8 mm)	572697
KISAN Kisan KD	KI 16*	571360
	KI 20*	571370
	KI 25*	571375
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
KISAN Kisan WL	KI 16*	571360
	KI 20*	571370
	KI 25*	571375
	KI 32	571380
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
KISAN Kisan WM	KI 16*	571360
	KI 20*	571370
	KI 25*	571375
	KI 32	571380
KISAN Kisan WR	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
KISAN Kistal C	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
KISAN Kistal Inox	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
KISAN	M 15	570110
	M 18	570120
	M 22	570130
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
KME cuprotherm CTX	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
KME Q-Tec - Comap SkinPress	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
KME Q-Tec - Oventrop Cofit	TH 26*	570475
	H 16 A*	570620
	H 20 A*	570650
	H 26 A*	570670

System	Pressing contour	Art.-No.
L		
LECHAR ALCOBRAPEX	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
LECHAR COBRAPEX	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
LEGEND-PRESS press fitting system	VUS ½" (OD 15,9 mm)	571770
	VUS ¾" (OD 22,2 mm)	571775
	VUS 1" (OD 28,6 mm)	571780
	VUS 1 ¼" (OD 34,9 mm)	571785
	VUS 1 ½" (OD 41,3 mm)	571790
	VUS 2" (OD 54,0 mm)	571795
	VUSFz 2 ½" (PR-3B) ³⁾ (OD 66,7 mm)	572819
	VUSFz 3" (PR-3B) ³⁾ (OD 79,4 mm)	572820
LK Systems LK >B<-Press	VUSFz 4" (PR-3B) ³⁾ (OD 104,8 mm)	572821
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
LK Systems LK >B<-Press Elförzinkat	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
LK Systems LK >B<-Press Gas	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
LK Systems LK Universal	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	TH 16*	570460
	TH 20*	570470
	TH 25*	570495
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
LVI-DAHL Altech-Alupex	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
M		
MAINCOR MAINPRESS	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
MAINCOR MAINFLOR	U 63 (PR-3B) ³⁾	572837
	U 16*	570765
Mair Heiztechnik Gomafix Cu/E	U 20*	570775
	M 12	570100
	M 15	570110
	M 18 ¹⁾	570120
	M 22	570130
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
Mair Heiztechnik	H 11,5"	570315
Gomafix M	H 14"	570310
	H 16"	570320
	H 20"	570350
Mair Heiztechnik	H 11,5"	570315
M-Press	H 14"	570310
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	U 40	570790
Ma.s.ter System	TH 14"	570455
PRESSMASTER	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 25"	570495
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	H 14"	570310
	H 16"	570320
	H 18"	570340
	H 20"	570350
	H 26"	570370
	H 32	570380
	H 40 (4G)	570390
	U 14"	570760
	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
METALGRUP	U 16"	570765
Permatubo	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
METALGRUP	RFz 16"	571325
PexGrup	RFz 20"	571330
	RFz 25	571335
	RFz 32	571340
METALGRUP	U 16"	570765
MultiGrup	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 32	570785
Mueller Industries	VUS ½" (OD 15,9 mm)	571770
Streamline PRS	VUS ¾" (OD 22,2 mm)	571775
	VUS 1" (OD 28,6 mm)	571780
	VUS 1¼" (OD 34,9 mm)	571785
	VUS 1½" (OD 41,3 mm)	571790
	VUS 2" (OD 54,0 mm)	571795
	VUSFz 2½" (PR-3B) ³⁾ 6)	572819
	(OD 66,7 mm)	
	VUSFz 3" (PR-3B) ³⁾ 6)	572820
	(OD 79,4 mm)	
	VUSFz 4" (PR-3B) ³⁾ 6)	572821
	(OD 104,8 mm)	
MULTITHERM	TH 16"	570460
PRESSSYSTEM	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	THz 75 (PR-3B) ³⁾	572829

System	Pressing contour	Art.-No.
Multicapac	RFz 16"	571325
Industrial	RFz 20"	571330
AIS PEX	RFz 25	571335
	RFz 32	571340
	U 16"	570765
	U 20"	570775
	U 25"	570780
	U 32	570785
Multicapac	MT 20"	571744
Industrial	MT 25"	571746
multitubo systems	MT 32	571748
MC	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	U 63 (PR-3B) ³⁾	572837
	U 75 (PR-3B) ³⁾	572828
Multicapac	H 16"	570320
Industrial	H 20"	570350
multitubo systems	H 25"	570360
MM	H 26"	570370
	H 32	570380
	MT 20"	571744
	MT 25"	571746
	MT 32	571748
	RFz 16"	571325
	RFz 20"	571330
	RFz 25	571335
	RFz 32	571340
	TH 16"	570460
	TH 20"	570470
	TH 25"	570495
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	THz 75 (PR-3B) ³⁾	572829
	U 16"	570765
	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	U 63 (PR-3B) ³⁾	572837
	U 75 (PR-3B) ³⁾	572828

N

NEUTHERM	H 16"	570320
MEKUPRESS-HT	H 20"	570350
	H 26"	570370
	H 32	570380
	H 40 (4G)	570390
	U 40	570790
NIBCO (USA)	VUS ½" (OD 15,9 mm)	571770
Press System	VUS ¾" (OD 22,2 mm)	571775
Copper	VUS 1" (OD 28,6 mm)	571780
	VUS 1¼" (OD 34,9 mm)	571785
	VUS 1½" (OD 41,3 mm)	571790
	VUS 2" (OD 54,0 mm)	571795
Nicoll Fluxo	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	THz 75 (PR-3B) ³⁾	572829

System	Pressing contour	Art.-No.
NUPI Industrie	B 16"	570850
Italiane	B 18"	570855
Multinupi	B 20"	570860
	B 26	570870
	B 32	570880
	F 16"	570717
	F 18"	570720
	F 20"	570727
	F 26"	570730
	F 32	570735
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16"	570320
	H 18"	570340
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 14"	570760
	U 16"	570765
	U 18"	570770
	U 20"	570775
	C 26"	570750
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
Nussbaum	VMP ¾" (OD 17,2 mm)	571740
Optifitt-Press	VMP ½" (OD 21,3 mm)	571762
	VMPz ¾" (OD 26,9 mm)	571764
	VMPz 1" (OD 33,7 mm)	571767
	VMPz 1¼" (S)	572413
	(OD 42,4 mm)	
	VMPz 1½" (PR-3B) ³⁾	572844
	(OD 48,3 mm)	
	VMPz 2" (PR-3B) ³⁾	572845
	(OD 60,3 mm)	
Nussbaum	VRX 16	571750
Optiflex-Flowpress	VRX 20	571752
	VRX 25	571754
	VRX 32	571756
	VRX 40	571758
	VRX 50	571760
	VRX 63	571797
Nussbaum	VP 16"	570910
Optiflex Press	VP 20"	570915
	VP 25"	570920
	VP 32	570925
Nussbaum	V 15	570115
Optipress	V 18	570125
Aquaplus	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VFz 64,0 (PR-3B) ³⁾	572815
	VFz 76,1 (PR-3B) ³⁾	572816
	VFz 88,9 (PR-3B) ³⁾	572817
	VFz 108,0 (PR-3B) ³⁾	572818
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- Adapter tongs are required for driving pressing rings (PR), see page 176.
- Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.
- For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- Driven by REMS Power-Press XL.

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2018. For the updated situation regarding suitability status check our website:
www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
Nussbaum Optipress-Gaz	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VFz 64,0 (PR-3B) ³⁾	572815
	VFz 76,1 (PR-3B) ³⁾	572816
	VFz 88,9 (PR-3B) ³⁾	572817
	VFz 108,0 (PR-3B) ³⁾	572818
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Nussbaum Optipress-Therm	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VFz 64,0 (PR-3B) ³⁾	572815
	VFz 76,1 (PR-3B) ³⁾	572816
	VFz 88,9 (PR-3B) ³⁾	572817
	VFz 108,0 (PR-3B) ³⁾	572818
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

O

O.M.T. - Press	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
Oventrop Cofit P	H 16 A*	570620
	H 20 A*	570650
	H 26 A*	570670
	H 32 A	570680
	H 40 A	570690
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
Oventrop Cofit PD	U 63 (S)	572365
	H 16 A*	570620
	H 20 A*	570650
Oventrop Cofit PDK	H 26 A*	570670
	H 16 A*	570620
	H 20 A*	570650
Oventrop Cofit PD-HT	H 16 A*	570620
	H 20 A*	570650
	H 25 A*	570660
	H 32 A	570680
Oventrop Cofit PDK-HT	H 16 A*	570620
	H 20 A*	570650

P

PBTub SERTIPRESS	RFz 12*	571320
	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
PBTub SERTI-STEEL	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Pegler Yorkshire XPress Carbon	M 12	570100
	M 15	570110
	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530

System	Pressing contour	Art.-No.
Pegler Yorkshire XPress Copper	M 12	570100
	M 15	570110
	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 64,0 XL (PR-3S) ^{3) 7)}	579100
	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	XP 108,0 XL (PR-3S) ^{3) 7)}	579109
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	Pegler Yorkshire XPress Copper Gas	M 15
M 18 ¹⁾		570120
M 22		570130
M 28 ¹⁾		570140
M 35		570150
M 42 (PR-3S) ³⁾		572706
M 54 (PR-3S) ³⁾	572708	
Pegler Yorkshire XPress Stainless	M 15	570110
	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
M 22 45° (PR-2B) ³⁾	574526	
M 28 45° (PR-2B) ³⁾	574528	
M 35 45° (PR-2B) ³⁾	574530	
Pegler Yorkshire XPress Stainless Gas	M 15	570110
	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
M 54 (PR-3S) ³⁾	572708	
PERFEXIM "PERFEKT SYSTEM"	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
PERFILTUBO PERFILALUPEX	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
PERFILTUBO PERFILPRESS	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
PEXTUBE PexTube	RFz 16*	571325
	RFz 20*	571330
	RFIz 25	571337
	RFIz 32	571342
Pipelife C-PRESS	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
M 22 45° (PR-2B) ³⁾	574526	
M 28 45° (PR-2B) ³⁾	574528	
M 35 45° (PR-2B) ³⁾	574530	

System	Pressing contour	Art.-No.
Pipelife RADOPRESS	TH 16°	570460
	TH 18°	570465
	TH 20°	570470
	TH 26°	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Pipetec Connect	TH 16°	570460
	TH 20°	570470
	TH 26°	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
PLASTICA ALFA Multypex	TH 16°	570460
	TH 20°	570470
	TH 26°	570475
	TH 32	570480
PLASTICA ALFA Multypex Air	TH 16°	570460
	TH 20°	570470
	TH 26°	570475
	TH 32	570480
PLASTICA ALFA Multypexalfa Gas	TH 16°	570460
	TH 20°	570470
	TH 26°	570475
PLASTICA ALFA Multypexalfa Gas protek	TH 16°	570460
	TH 20°	570470
	TH 26°	570475
PLASTICA ALFA Multypex Plus	TH 16°	570460
	TH 20°	570470
	TH 26°	570475
	TH 32	570480
PLASTICA ALFA Multypex Thermo	TH 16°	570460
	TH 20°	570470
	TH 26°	570475
	TH 32	570480
PLASTICA ALFA Multypex Thermo Plus	TH 16°	570460
	TH 20°	570470
	TH 26°	570475
	TH 32	570480
PLÁSTICOS FERRO FERROPLAST GPF MC PRESS	U 16°	570765
	U 20°	570775
	U 25°	570780
	U 32	570785
Pressfitting MULTICAPA		
PLÁSTICOS FERRO FERROPLAST GPF PPSU	U 16°	570765
	U 20°	570775
	U 25°	570780
	U 32	570785
Pressfitting PE-X y MULTICAPA		
PLÁSTICOS FERRO FERROPLAST GPF PRESS	RFz 16°	571325
	RFz 20°	571330
	RFz 25	571335
	RFz 32	571340
Pressfitting PE-X		
PLUMBING PLUS EZIPEX Crimp (AUS)	K16/P18°	572600
	K/20°	572605
	K/25°	572610
	K32	572615
	K1/40	572620
	K1/50	572625
PLUMBING PLUS EZIPEX Gas (AUS)	K16/P18°	572600
	K/20°	572605
	K/25°	572610
	K32	572615
	K1/40	572620
	K1/50	572625
PLUMBING PLUS EZIPRESS Gas (AUS)	VAU 15 (OD 12,7 mm)	572687
	VAU 20 (OD 19,1 mm)	572689
	VAU 25 (OD 25,4 mm)	572691
	VAU 32 (OD 31,8 mm)	572693
	VAU 40 (OD 38,1 mm)	572695
	VAU 50 (OD 50,8 mm)	572697
	VAUFz 65 (PR-3B) ³⁾	572839
	(OD 63,5 mm)	
	VAUFz 80 (PR-3B) ³⁾	572840
	(OD 76,2 mm)	
	VAUFz 100 (PR-3B) ³⁾	572841
	(OD 101,6 mm)	
	VAU 15 45° (PR-2B) ³⁾	574540
(OD 12,7 mm)		
VAU 20 45° (PR-2B) ³⁾	574542	
(OD 19,1 mm)		
VAU 25 45° (PR-2B) ³⁾	574544	
(OD 25,4 mm)		
PLUMBING PLUS EZIPRESS Solar (AUS)	VAU 15 (OD 12,7 mm)	572687
	VAU 20 (OD 19,1 mm)	572689
	VAU 25 (OD 25,4 mm)	572691
	VAU 15 45° (PR-2B) ³⁾	574540
	(OD 12,7 mm)	
	VAU 20 45° (PR-2B) ³⁾	574542
	(OD 19,1 mm)	
VAU 25 45° (PR-2B) ³⁾	574544	
(OD 25,4 mm)		

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
PLUMBING PLUS	VAU 15 (OD 12,7 mm)	572687
EZIPRESS Water (AUS)	VAU 20 (OD 19,1 mm)	572689
	VAU 25 (OD 25,4 mm)	572691
	VAU 32 (OD 31,8 mm)	572693
	VAU 40 (OD 38,1 mm)	572695
	VAU 50 (OD 50,8 mm)	572697
	VAUFz 65 (PR-3B) ³⁾	572839
	(OD 63,5 mm)	
	VAUFz 80 (PR-3B) ³⁾	572840
	(OD 76,2 mm)	
	VAUFz 100 (PR-3B) ³⁾	572841
	(OD 101,6 mm)	
	VAU 15 45° (PR-2B) ³⁾	574540
	(OD 12,7 mm)	
	VAU 20 45° (PR-2B) ³⁾	574542
	(OD 19,1 mm)	
	VAU 25 45° (PR-2B) ³⁾	574544
	(OD 25,4 mm)	
POLYPIPE	TH 10*	570467
POLYSURE	TH 15*	570457
	TH 22*	570472
	TH 28	570477
POLYSAN	M 15	570110
Handelsges.	M 18	570120
m.b.H. & Co KG	M 22	570130
(Krems/Öster-reich)	M 28	570140
	M 35	570150
POLYSAN-	M 42 (PR-3S) ³⁾	572706
C-Stahl-Press-System M	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
POLYSAN	V 15	570115
Handelsges.	V 18	570125
m.b.H. & Co KG	V 22	570135
(Krems/Öster-reich)	V 28	570145
	V 35	570155
POLYSAN-	V 42	570165
C-Stahl-Press-System V	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
POLYSAN	M 15	570110
Handelsges.	M 18	570120
m.b.H. & Co KG	M 22	570130
(Krems/Öster-reich)	M 28	570140
	M 35	570150
POLYSAN-	M 42 (PR-3S) ³⁾	572706
Edelstahl	M 54 (PR-3S) ³⁾	572708
Press-System	M 15 45° (PR-2B) ³⁾	574522
Gas	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
POLYSAN	M 15	570110
Handelsges.	M 18	570120
m.b.H. & Co KG	M 22	570130
(Krems/Öster-reich)	M 28	570140
	M 35	570150
POLYSAN-	M 42 (PR-3S) ³⁾	572706
Edelstahl	M 54 (PR-3S) ³⁾	572708
Press-System	M 76,1 XL (PR-3S) ^{3) 7)}	579101
Wasser	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530

System	Pressing contour	Art.-No.
POLYSAN	TH 14*	570455
Handelsges.	TH 16*	570460
m.b.H. & Co KG	TH 17*	570462
(Krems/Öster-reich)	TH 18*	570465
	TH 20*	570470
POLYSAN-	TH 26*	570475
Press-System	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	THz 75 (PR-3B) ³⁾	572829
POLYSAN	TH 14*	570455
Handelsges.	TH 16*	570460
m.b.H. & Co KG	TH 17*	570462
(Krems/Öster-reich)	TH 18*	570465
	TH 20*	570470
POLYSAN-Henco-	TH 26*	570475
Press-System	HE 32	571900
	HEz 40	571904
POLYSAN	U 16*	570765
(España)	U 18*	570770
Rainbow	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
Prandelli	H 14*	570310
Multyrama Pf	H 16*	570320
	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
Prandelli	H 16*	570320
Multyrama Pfm	H 18*	570340
	H 20*	570350
	H 26*	570370
	H 32	570380
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	THz 75 (PR-3B) ³⁾	572829
	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 40	570790
	U 50	570795
R		
Raccorderie	M 15	570110
Metallische	M 18	570120
aesPRES ¹⁾	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
Raccorderie	M 15	570110
Metallische	M 18	570120
inoxPRES ¹⁾	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708

System	Pressing contour	Art.-No.
Raccorderie	M 15	570110
Metallische	M 18	570120
steelPRES ¹⁾	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
RBM Tita-gas	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
RBM Tita-fix	B 14*	570845
	B 16*	570850
	B 18*	570855
	B 20*	570860
	B 26	570870
	F 16*	570717
	F 18*	570720
	F 20*	570727
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	H 14*	570310
	H 16*	570320
	H 18*	570330
	H 20*	570340
	H 26*	570350
	H 32	570370
	TH 14*	570380
	TH 16*	570390
	TH 18*	570400
	TH 20*	570410
	TH 26*	570420
	TH 32	570430
	TH 40	570440
	TH 50 (S)	572450
	TH 63 (S)	572460
	U 14*	570760
	U 16*	570765
	U 18*	570770
	U 20*	570775
Redi Nicoll Fluxo	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	THz 75 (PR-3B) ³⁾	572829
Redi Nicoll Fluxo Gas	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
RIFENG U	U 14*	570760
PRESS FITTING (F5)	U 16*	570765
	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
	U 63 (PR-3B) ³⁾	572837
	U 75 (PR-3B) ³⁾	572828
RIFENG TH	TH 16*	570460
PRESS FITTING (F9)	TH 20*	570470
	TH 25*	570495
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Adapter tongs are required for driving pressing rings (PR), see page 176.

⁴⁾ Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Driven by REMS Power-Press XL.

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2018. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
RIQUIER	RFz 12"	571320
A SERTIR	RFz 16"	571325
	RFz 20"	571330
	RFz 25	571335
Roth PressCheck	RN 14"	572672
	RN 16	572670
	RN 17"	572674
	RN 20"	572676
	RN 25/26	572678
	RN 32	572680
	RN 40 (PR-3S) ³⁾	572714
	RN 50 (PR-3S) ³⁾	572716
	RNz 63 (PR-3B) ³⁾	572836
Roth España - Global Plastic	TH 16"	570460
	TH 18"	570465
Rothapress	TH 20"	570470
	TH 25"	570495
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Rubinetterie	M 15	570110
Bresciane	M 18	570120
Bonomi	M 22	570130
TURBO INOX	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Rubinetterie	M 15	570110
Bresciane	M 18	570120
Bonomi	M 22	570130
TURBO INOX GAS	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Rubinetterie	M 15	570110
Bresciane	M 18	570120
Bonomi	M 22	570130
TURBO STEEL	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Rubinetterie	TH 14"	570455
Bresciane	TH 16"	570460
Bonomi	TH 18"	570465
TURBO PRESS	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Rubinetterie	TH 16"	570460
Bresciane	TH 20"	570470
Bonomi	TH 26"	570475
TURBO PRESS GAS	TH 32	570480
S		
Sa.MI plastic	TH 14"	570455
	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
Sa.MI plastic	TH 16"	570460
Multistrato Gas	TH 20"	570470
	TH 26"	570475
	TH 32	570480

System	Pressing contour	Art.-No.
SANHA	B 16"	570850
3fit-Press Pb-free	B 20"	570860
Serie 25000	B 26	570870
	B 32	570880
	F 16"	570717
	F 20"	570727
	F 26"	570730
	F 32	570735
	Fz 40	570742
	Fz 50	570747
	F 63 (S)	572385
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	H 40 (4G)	570390
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16"	570765
	U 20"	570775
	C 26"	570750
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
SANHA	B 16"	570850
3fit-Press PPSU	B 20"	570860
Serie 35000	B 26	570870
	B 32	570880
	F 16"	570717
	F 20"	570727
	F 26"	570730
	F 32	570735
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16"	570765
	U 20"	570775
	C 26"	570750
	U 32	570785
SANHA-NiroSan	SA 15	570935
Gas Presssystem	SA 18	570940
Serie 17000	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

System	Pressing contour	Art.-No.
SANHA-NiroSan	SA 15	570935
Industry	SA 18	570940
Presssystem	SA 22	570945
Serie 18000	SA 28	570950
	SA 35	570955
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 64,0 XL (PR-3S) ^{3) 7)}	579100
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
SANHA-NiroSan- Presssystem	SA 15	570935
Serie 9000	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 64,0 XL (PR-3S) ^{3) 7)}	579100
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
SANHA-NiroSan	SA 15	570935
SF Presssystem	SA 18	570940
Serie 19000	SA 22	570945
(silicone free)	SA 28	570950
	SA 35	570955
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
SANHA NiroTherm Serie 91000	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
SANHA NiroTherm Industry Serie 98000	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
SANHA-Press Chrom Serie 16000	SA 12	570930
	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

System	Pressing contour	Art.-No.
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12	570930
	SA 14	570932
	SA 15	570935
	SA 16	570937
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	570107
	V 14	570112
	VG 14	570132
	V 15	570115
	V 16	570117
	VG 16	570137
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	VG 14 45° (PR-2B) ³⁾	574536
	V 15 45° (PR-2B) ³⁾	574504
	VG 16 45° (PR-2B) ³⁾	574538
SANHA-Press Pressfittings Serie 6000	SA 12	570930
	SA 14	570932
	SA 15	570935
	SA 16	570937
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 64,0 XL (PR-3S) ^{3) 7)}	579100
	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
	M 66,7 XL (PR-3S) ^{3) 7)}	579107
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	570107
	V 14	570112
	VG 14	570132
	V 15	570115
	V 16	570117
	VG 16	570137
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	VG 14 45° (PR-2B) ³⁾	574536
	V 15 45° (PR-2B) ³⁾	574504
	VG 16 45° (PR-2B) ³⁾	574538
SANHA-Press Pressfittings Serie 6000	SA 12	570930
	SA 14	570932
	SA 15	570935
	SA 16	570937
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 64,0 XL (PR-3S) ^{3) 7)}	579100
	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
	M 66,7 XL (PR-3S) ^{3) 7)}	579107
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	570107
	V 14	570112
	VG 14	570132
	V 15	570115
	V 16	570117
	VG 16	570137
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	VG 14 45° (PR-2B) ³⁾	574536
	V 15 45° (PR-2B) ³⁾	574504
	VG 16 45° (PR-2B) ³⁾	574538

System	Pressing contour	Art.-No.
SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12	570930
	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 64,0 XL (PR-3S) ^{3) 7)}	579100
	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
	M 66,7 XL (PR-3S) ^{3) 7)}	579107
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
SANHA PURAPRESS Serie 8000	SA 12	570930
	SA 14	570932
	SA 15	570935
	SA 16	570937
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 12	570100
	M 15 ¹⁾	570110
	M 18 ¹⁾	570120
	M 22 ¹⁾	570130
	M 28 ¹⁾	570140
	M 35 ¹⁾	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 64,0 XL (PR-3S) ^{3) 7)}	579100
	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
	M 66,7 XL (PR-3S) ^{3) 7)}	579107
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	570107
	V 14	570112
	VG 14	570132
	V 15	570115
	V 16	570117
	VG 16	570137
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
V 12 45° (PR-2B) ³⁾	574502	
VG 14 45° (PR-2B) ³⁾	574536	
V 15 45° (PR-2B) ³⁾	574504	
VG 16 45° (PR-2B) ³⁾	574538	
V 18 45° (PR-2B) ³⁾	574506	
V 22 45° (PR-2B) ³⁾	574508	
V 28 45° (PR-2B) ³⁾	574510	
V 35 45° (PR-2B) ³⁾	574512	

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
SANHA-Therm Serie 24000	SA 12	570930
	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
	M 66,7 XL (PR-3S) ^{3) 7)}	579107
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
SANHA-Therm Industry Serie 28000	SA 12	570930
	SA 15	570935
	SA 18	570940
	SA 22	570945
	SA 28	570950
	SA 35	570955
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
	M 66,7 XL (PR-3S) ^{3) 7)}	579107
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
SANPRO THPRESS	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
SATEC SK VITerm	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 40	570790
	U 50	570795
Schütz duo-flex tri-o-flex	U 63 (S)	572365
	TH 14*	570455
	TH 16*	570460
	TH 17*	570462
	TH 20*	570470
	TH 25*	570495

System	Pressing contour	Art.-No.
Schwer Fittings AQUAPress	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Seppelfricke VSH SudoPress C-Stahl	V 12	570107
	V 15	570115
	V 18	570125
Visu-Control	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Seppelfricke VSH SudoPress Edelstahl	V 12	570107
	V 15	570115
	V 18	570125
Visu-Control	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Seppelfricke VSH SudoPress Kupfer	V 12	570107
	V 15	570115
	V 18	570125
Visu-Control	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Seppelfricke VSH SudoPress Kupfer Gas	V 12	570107
	V 15	570115
	V 18	570125
Visu-Control	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Seppelfricke VSH SudoPress Kupfer Solar	V 15	570115
	V 18	570125
	V 22	570135
Visu-Control	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
Seppelfricke VSH XPress C-Stahl	M 12	570100
	M 15	570110
	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
SOMATHERM MULTIX	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530

System	Pressing contour	Art.-No.
Seppelfricke VSH XPress Edelstahl	M 15	570110
	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
Seppelfricke VSH XPress Edelstahl Gas	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 15	570110
	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
Seppelfricke VSH XPress Kupfer	M 12	570100
	M 15	570110
	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 64,0 XL (PR-3S) ^{3) 7)}	579100
	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
SESTA SESTA GAS	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	XP 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 15	570110
Seppelfricke VSH XPress Kupfer Gas	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
SESTA Sistema multistrato	TH 14*	570455
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 30*	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16*	570765
	U 20*	570775
SLOVARM PEX-THERM	U 16*	570765
	U 20*	570775
	H 26*	570370
	U 32	570785
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
SOMATHERM MULTIX	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 16*	570765
	U 20*	570775
SOMATHERM SomaPRESS	U 32	570785
	H 12*	570300
	H 16*	570320
	H 20*	570350
	H 25*	570360
	RFz 12*	571320
	RFz 16*	571325
	RFz 20*	571330
	RFz 25	571335
	U 16*	570765
	U 20*	570775
	U 25*	570780

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
STANDARD	U 16"	570765
HIDRAULICA	U 18"	570770
MultiStandard	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
STELBI	H 16"	570320
Polikraft	H 20"	570350
	H 26"	570370
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16"	570765
	U 20"	570775
STELBI	TH 16"	570460
Stelgas	TH 20"	570470
	TH 26"	570475
STPC STPEX	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
System Ewoprex	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
	U 32	570785
System	H 16 A"	570620
WELCO-Gas	H 20 A"	570650
	H 26 A"	570670
	H 32 A	570680
System	H 14 A"	570610
WOPREX	H 16 A"	570620
	H 17 A"	570630
	H 20 A"	570650
	H 26 A"	570670
	H 32 A	570680
	H 40 A (4G)	570695
T		
TDM BRASS	H 16"	570320
Serie 1600	H 18"	570340
	H 20"	570350
	H 25"	570360
	H 26"	570370
	H 32	570380
	TH 16"	570460
	TH 18"	570465
	TH 20"	570470
	TH 25"	570495
	TH 26"	570475
	THL 32	570487
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16"	570765
	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 26"	570750
	U 32	570785
TDM BRASS	TH 16"	570460
Serie 1700 gas	TH 20"	570470
	TH 26"	570475
	THL 32	570487
TermoConcept	Basic E01 ³⁾	571855
TC-PRESS		

System	Pressing contour	Art.-No.
THERMOLUTZ	H 14"	570310
	H 16"	570320
	TH 20"	570470
TE-SA	TH 14"	570455
TE-SA press	TH 16"	570460
serie 800	TH 18"	570465
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
TIEMME	TH 14"	570455
AL-COBRAPEX	TH 16"	570460
Serie 1650	TH 18"	570465
	TH 20"	570470
	TH 25"	570495
	TH 26"	570475
	THL 32	570487
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	THz 75 (PR-3B) ³⁾	572829
TIEMME	RFz 12"	571320
Serie 1700 PE-X	RFz 16"	571325
a pressare	RFz 20"	571330
	RFz 25	571335
	RFz 32	571340
TIEMME	TH 16"	570460
TIEMME Gas	TH 20"	570470
	TH 26"	570475
	THL 32	570487
TIGRE	TH 16"	570460
ALPEX GÁS	TH 20"	570470
	TH 26"	570475
	TH 32	570480
TKM	TH 14"	570455
Systemtechnik	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
TRA	U 16"	570765
MULTITRAPRESS	U 18"	570770
	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
TRA TRAPRESS	H 12"	570300
	H 16"	570320
	H 20"	570350
	H 25"	570360
	H 32	570380
	RFz 12"	571320
	RFz 16"	571325
	RFz 20"	571330
	RFz 25	571335
	RFz 32	571340
TWEETOP	U 16"	570765
	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
U		
UNICAL AG	U 16"	570765
MAX-MULTIPEX	U 20"	570775
	H 26"	570370
	C 26"	570750
	U 32	570785

System	Pressing contour	Art.-No.
UNIDELTA	TH 16"	570460
DeltAll	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	H 40 (4G)	570390
	U 16"	570765
	U 20"	570775
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (S)	572365
UNIDELTA	TH 16"	570460
DeltAll GAS	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	U 16"	570765
	U 20"	570775
	U 32	570785
Uponor MLC	UP 14"	572630
	UP 16"	572632
	UP 18"	572634
	UP 20"	572636
	UP 25	572638
	UP 32	572640
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
Uponor MLC-D	UP 16"	572632
	UP 20"	572636
	UP 25	572638
	UP 32	572640
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
Uponor MLC-G ³⁾	UP 20"	572636
	UP 25	572638
	UP 32	572640
Uponor	UP 16"	572632
Uni Pipe PLUS	UP 20"	572636
	UP 25	572638
	UP 32	572640
V		
Valsir Bravopress	B 16"	570850
	B 20"	570860
	B 26	570870
	B 32	570880
	F 16"	570717
	F 26"	570730
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	H 32 V	570685
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	U 16"	570765
	U 20"	570775
	C 26"	570750
	U 32	570785

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- Adapter tongs are required for driving pressing rings (PR), see page 176.
- Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.
- For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- Driven by REMS Power-Press XL.

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2018. For the updated situation regarding suitability status check our website:
www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.
Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
Valsir PEXAL	H 14"	570310
	H 16"	570320
	H 20"	570350
	H 26"	570370
	H 32	570380
	H 32 V	570685
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16"	570765
	U 20"	570775
	C 26"	570750
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
Van Marcke Log. Tubipex	TH 16"	570460
	TH 17"	570462
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	THz 75 (PR-3B) ³⁾	572829
Van Marcke Log. Tubipress	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
Variotherm System TH	TH 11,6"	570482
	TH 16"	570460
	TH 20"	570470
Viega Fonterra	VX 12"	571630
	VP 14/15"	570905
	VP 16/17"	570910
	VP 20"	570915
	VP 25	570920
Viega MegaPress	VMP ¾" (OD 17,2 mm)	571740
	VMP ½" (OD 21,3 mm)	571762
	VMPz ¾" (OD 26,9 mm)	571764
	VMPz 1" (OD 33,7 mm)	571767
	VMPz 1¼" (S)	572413
	(OD 42,4 mm)	
	VMPz 1½" (PR-3B) ³⁾	572844
	(OD 48,3 mm)	
VMPz 2" (PR-3B) ³⁾		572845
	(OD 60,3 mm)	
Viega Pexfit	VX 16"	571635
	VX 20"	571640
	VX 25"	571645
Viega Pexfit G	VX 16"	571635
	VX 20"	571640
	VX 25"	571645
Viega Prestabo	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VFz 64,0 (PR-3B) ^{3) 6)}	572815
	VFz 76,1 (PR-3B) ^{3) 6)}	572816
	VFz 88,9 (PR-3B) ^{3) 6)}	572817
	VFz 108,0 (PR-3B) ^{3) 6)}	572818
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512

System	Pressing contour	Art.-No.
Viega Profipress	V 12	570107
	VG 14	570132
	V 15	570115
	VG 16	570137
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VFz 64,0 (PR-3B) ^{3) 6)}	572815
	VFz 76,1 (PR-3B) ^{3) 6)}	572816
	VFz 88,9 (PR-3B) ^{3) 6)}	572817
	VFz 108,0 (PR-3B) ^{3) 6)}	572818
	V 12 45° (PR-2B) ³⁾	574502
	VG 14 45° (PR-2B) ³⁾	574536
	V 15 45° (PR-2B) ³⁾	574504
	VG 16 45° (PR-2B) ³⁾	574538
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
Viega Profipress G	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
Viega Profipress S	VFz 64,0 (PR-3B) ^{3) 6)}	572815
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 12	570107
	V 15	570115
	V 18	570125
Viega Profipress Therm	V 22	570135
	V 28	570145
	V 35	570155
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 12	570107
Viega ProPress System USA	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
XL-C/XL-S	V 35 45° (PR-2B) ³⁾	574512
	VUS ½" (OD 15,9 mm)	571770
	VUS ¾" (OD 22,2 mm)	571775
	VUS 1" (OD 28,6 mm)	571780
	VUS 1¼" (OD 34,9 mm)	571785
	VUS 1½" (OD 41,3 mm)	571790
	VUS 2" (OD 54,0 mm)	571795
	VUSFz 2½" (PR-3B) ^{3) 6)}	572819
	(OD 66,7 mm)	
	VUSFz 3" (PR-3B) ^{3) 6)}	572820
XL-C/XL-S	(OD 79,4 mm)	
	VUSFz 4" (PR-3B) ^{3) 6)}	572821
	(OD 104,8 mm)	
	Vauga Propress	VAU 15 (OD 12,7 mm)
	WATER System	VAU 20 (OD 19,1 mm)
	AUS	VAU 25 (OD 25,4 mm)
		VAU 32 (OD 31,8 mm)
		VAU 40 (OD 38,1 mm)
		VAU 50 (OD 50,8 mm)
		572687
Viega PropressG GAS System AUS	VAU 20 (OD 19,1 mm)	572689
	VAU 25 (OD 25,4 mm)	572691
	VAU 32 (OD 31,8 mm)	572693
	VAU 40 (OD 38,1 mm)	572695
	VAU 50 (OD 50,8 mm)	572697
	VAU 15 (OD 12,7 mm)	572687
	VAU 20 (OD 19,1 mm)	572689
	VAU 25 (OD 25,4 mm)	572691
	VAU 32 (OD 31,8 mm)	572693
	VAU 40 (OD 38,1 mm)	572695
Viega Raxinox	VAU 50 (OD 50,8 mm)	572697
	VRX 16	571750
	VRX 20	571752
	VRX 16	571750
	VRX 20	571752
	VRX 25	571754
	VRX 32	571756
	VRX 40	571758
	VRX 50	571760
	VRX 63	571797

System	Pressing contour	Art.-No.
Viega Sanfix ³⁾	VP 16/17"	570910
	VP 20"	570915
	VP 25"	570920
	VP 32	570925
Viega Sanpress	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VR 76,1 (PR-3B) ^{3) 6)}	572822
	VR 88,9 (PR-3B) ^{3) 6)}	572823
	VR 108,0 (PR-3B) ^{3) 6)}	572824
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
Viega Sanpress Inox	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VFz 64,0 (PR-3B) ^{3) 6)}	572815
Viega Sanpress Inox G	VFz 76,1 (PR-3B) ^{3) 6)}	572816
	VFz 88,9 (PR-3B) ^{3) 6)}	572817
	VFz 108,0 (PR-3B) ^{3) 6)}	572818
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	V 15	570115
	V 18	570125
Viessmann	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	VFz 64,0 (PR-3B) ^{3) 6)}	572815
	VFz 76,1 (PR-3B) ^{3) 6)}	572816
	VFz 88,9 (PR-3B) ^{3) 6)}	572817
	VFz 108,0 (PR-3B) ^{3) 6)}	572818
	V 15 45° (PR-2B) ³⁾	574504
VINSAR PEX-AL-PEX	V 18 45° (PR-2B) ³⁾	574506
	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
Vogel & Noot EASYTEC	TH 14"	570455
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
VSH MultiPress	TH 40	570485
	TH 16"	570460
	TH 20"	570470
	TH 26"	570475
	TH 32	570480
VSH MultiPress	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405
	U 14"	570760
	U 16"	570765
	U 20"	570775
	U 25"	570780
	U 32	570785
	U 40	570790
	TH 14"	570455
	TH 16"	570460
	TH 20"	570470
	TH 25"	570495
	TH 26"	570475
	TH 32	570480
	TH 40	570485
	TH 50 (S)	572400
	TH 63 (S)	572405

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
VSH	V 12	570107
SudoPress Carbon	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
SudoPress Copper	V 54	570175
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
SudoPress	V 35	570155
	V 42	570165
	V 54	570175
	V 12	570107
	V 15	570115
	V 18	570125
Copper Gas	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
	V 54	570175
	V 12	570107
SudoPress	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
	V 35	570155
	V 42	570165
Stainless	V 54	570175
	M 12	570100
	M 15	570110
	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
VSH	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
XPress Carbon	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
XPress Copper	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 12	570100
	M 15	570110
	M 18 ¹⁾	570120
SudoPress	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	XP 64,0 XL (PR-3S) ^{3) 7)}	579100
Copper Gas	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	XP 108,0 XL (PR-3S) ^{3) 7)}	579109
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
SudoPress	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 12	570100
	M 15	570110
Stainless	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
VSH	XP 64,0 XL (PR-3S) ^{3) 7)}	579100
	XP 66,7 XL (PR-3S) ^{3) 7)}	579108
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	XP 108,0 XL (PR-3S) ^{3) 7)}	579109
	M 12 45° (PR-2B) ³⁾	574520
XPress Copper	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 12	570100

System	Pressing contour	Art.-No.
VSH	M 15	570110
XPress Copper	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
XPress Stainless	M 15	570110
	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (4G)	570160
VSH	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
XPress	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 15	570110
VSH	M 18 ¹⁾	570120
	M 22	570130
	M 28 ¹⁾	570140
	M 35	570150
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
W		
Meier Tobler	U 16*	570765
Metalplast - Stramax	U 18*	570770
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
Watts MTR	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
Art press	TH 32	570480
	US 3/8"	571450
	RADIANT	571455
	US 1/2"	571460
	Watts WaterPEX	571465
	US 1 1/4"	571470
WATTS	US 1 1/2"	571475
	US 3/8"	571450
	RADIANT	571455
	US 1/2"	571460
	Watts	571465
	US 1 1/4"	571470
RadiantPEX	US 1 1/2"	571475
	WATTS	570765
	RADIANT	570775
	Watts	570780
	RadiantPEX-AL	570785
	U 32 (1")	570785
Wavin	U 16 (1/2")	570765
	U 20 (3/4")	570775
	U 25 (1")	570780
	U 32	570785
	U 40	570790
	U 50	570795
Tigris K1/K5	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
	U 14*	570760
	U 16*	570765
	U 20*	570775
SudoPress	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
VSH	U 75 (PR-3B) ³⁾	572828
	U 14*	570760
	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
SudoPress	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
	U 12	570100
C-Stahl	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
WeeConPress	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
C-Stahl	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530

System	Pressing contour	Art.-No.
Wavin	U 14*	570760
Tigris M1/M5	U 16*	570765
	U 20*	570775
	U 25*	570780
	U 32	570785
	U 40	570790
	U 50	570795
WeeConPress	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	U 75 (PR-3B) ³⁾	572828
	M 12	570100
	M 15	570110
	M 18	570120
Alu	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
WeeConPress	M 54 (PR-3S) ³⁾	572708
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
C-Stahl	M 35 45° (PR-2B) ³⁾	574530
	V 12	570107
	V 15	570115
	V 18	570125
	V 22	570135
	V 28	570145
WeeConPress	V 35	570155
	V 42	570165
	V 54	570175
	V 12 45° (PR-2B) ³⁾	574502
	V 15 45° (PR-2B) ³⁾	574504
	V 18 45° (PR-2B) ³⁾	574506
C-Stahl	V 22 45° (PR-2B) ³⁾	574508
	V 28 45° (PR-2B) ³⁾	574510
	V 35 45° (PR-2B) ³⁾	574512
	SA 12	570930
	SA 15	570935
	SA 18	570940
WeeConPress	SA 22	570945
	SA 28	570950
	SA 35	570955
	SA 42 (PR-3S) ³⁾	572710
	SA 54 (PR-3S) ³⁾	572712
	M 12	570100
C-Stahl	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
WeeConPress	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
C-Stahl	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.
Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Adapter tongs are required for driving pressing rings (PR), see page 176.

⁴⁾ Press fittings made of red bronze (ProPress XL) must be pressed with pressing rings with press contour VUSR, copper fittings (ProPress XL-C) and stainless steel fittings (ProPress XL-S) with pressing rings with press contour VUSF.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Driven by REMS Power-Press XL.

The suitability of REMS pressing tools for pressfitting systems: Date 15.10.2018. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing contour	Art.-No.
WeeConPress Inox	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
WeeConPress Kupfer	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	M 12	570100
	M 15	570110
	M 18	570120
	M 22	570130
	M 28	570140
	M 35	570150
	M 42 (4G)	570160
	M 54 (4G)	570170
	M 42 (PR-3S) ³⁾	572706
	M 54 (PR-3S) ³⁾	572708
	M 76,1 XL (PR-3S) ^{3) 7)}	579101
	M 88,9 XL (PR-3S) ^{3) 7)}	579102
	M 108,0 XL (PR-3S) ^{3) 7)}	579103
	M 12 45° (PR-2B) ³⁾	574520
	M 15 45° (PR-2B) ³⁾	574522
WeeConFlex MVR	M 18 45° (PR-2B) ³⁾	574524
	M 22 45° (PR-2B) ³⁾	574526
	M 28 45° (PR-2B) ³⁾	574528
	M 35 45° (PR-2B) ³⁾	574530
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	U 40	570790
	U 50	570795
	U 63 (PR-3B) ³⁾	572837
	U 63 (S)	572365
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
WEM	TH 50 (S)	572400
	TH 63 (S)	572405
	U 16*	570765

System	Pressing contour	Art.-No.
WIELAND cuprotherm CTX ³⁾	TH 14 ²⁾	570455
	TH 16 ²⁾	570460
	TH 18 ²⁾	570465
	TH 20 ²⁾	570470
	TH 26 ²⁾	570475
WKS-Press	TH 14*	570455
	TH 16*	570460
	TH 17*	570462
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
	TH 40	570485
WÜRTH Würth	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	HE 32	571900
X		
XtraConnect	F 16*	570717
	F 20*	570727
	F 26*	570730
	F 32	570735
	F 16 45° (PR-2B) ³⁾	574550
	F 20 45° (PR-2B) ³⁾	574552
	F 26 45° (PR-2B) ³⁾	574554
	F 32 45° (PR-2B) ³⁾	574556
	H 16*	570320
	H 20*	570350
	H 26*	570370
	H 32	570380
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 16*	570765
(DN 26)	U 20*	570775
	U 25*	570780
	U 32	570785
	VP 16*	570910
	VP 20*	570915
	VP 32	570925
	VP 32	570925
Z		
Zetaesse	TH 14*	570455
Multistrato	TH 16*	570460
EUROPEX	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 14*	570760
	U 16*	570765
	U 18*	570770
	U 20*	570775

System	Pressing contour	Art.-No.
Zetaesse Multistrato ISOPEX	TH 14*	570455
	TH 16*	570460
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	U 14*	570760
	U 16*	570765
	U 18*	570770
	U 20*	570775
ZEWOTHERM Zewo Press Premium	TH 12*	570452
	TH 16*	570460
	TH 17*	570462
	TH 18*	570465
	TH 20*	570470
	TH 26*	570475
	TH 32	570480
	TH 40	570485
ZEWOTHERM Zewo Press PPSU	TH 50 (S)	572400
	TH 63 (S)	572405
	TH 16*	570460
	TH 20*	570470
	TH 26*	570475
ZURN INDUSTRIES ZURN PEX	TH 32	570480
	US 3/8"	571450
	US 1/2"	571455
	US 3/4"	571460
	US 1"	571465
	US 1 1/4"	571470
	US 1 1/2"	571475
	US 2"	571477

Accessories

Description	Art.-No.	
Adapter tongs Z1 for driving REMS pressing rings 45° (PR-2B)	574500	
Adapter tongs Z2 for driving REMS pressing rings M 35–54 (PR-3S), RN 40–50 (PR-3S)	572795	
Adapter tongs Z4 for driving REMS pressing rings F 75 (PR-3B), TH 63–75 (PR-3B), U 63–75 (PR-3B), RN 63 (PR-3B)	572801	
Adapter tongs Z5 for driving REMS pressing rings VFz/VR 64–108 (PR-3B), VMPz 1 1/2–2" (PR-3B), VUSFz 2 1/2–4" (PR-3B), VAUFz 65–100 (PR-3B)	572802	
Adapter tongs Z6 XL for driving REMS pressing rings XL 64,0–108,0 (PR-3S) with REMS Power-Press XL	579120	
Steel case with insert for 6 pressing tongs (up to Ø 35 mm/1" and pressing tongs U 40, U 50, TH 40, F 40, F 50, G 40, VUS 1 1/4"/cropping tongs and compartment for pipe cutter up to 42 mm	570295	
Steel case with insert for 2 pressing tongs (M 42 (4G), M 54 (4G), V 42, V 54, H 40, H 40 A, VUS 1 1/2", VUS 2")	570290	
Steel case with insert for adapter tongs with pressing rings M 42 (PR-3S) and M 54 (PR-3S) or with pressing rings SA 42 (PR-3S) and M 54 (PR-3S).	572810	
Steel case with inlay for adapter tongs and 4 pressing rings VFz 64,0–108,0/VR 76,1–108,0/ VUSFz 2 1/2–4" (PR-3B)	572809	
Steel case with insert for adapter tongs Mini Z1 and adapter tongs Z1 and 6 REMS pressing rings V 12–35 45° (PR-2B) or M 12–35 45° (PR-2B)	574516	



Confirmation of suitability

The suitability of crimping tools is determined basically by the manufacturer of crimping tools. Moreover the suitability of REMS crimping tools has been confirmed by the system manufacturer/supplier himself or approved through independent testing institutes.

Confirmation of suitability through the system manufacturer/supplier

More than 90 % of the manufacturers/suppliers of the pressfitting systems listed herein have tested REMS pressing tools and confirmed the suitability for their pressfitting system.

Confirmation of suitability through independent testing institutes

The suitability of REMS pressing tools for additional pressfitting systems have been confirmed through independent technical institutes:

TÜV-Certificates

Exist for Geberit Mepla, Geberit Mapress C-STAHl, Geberit Mapress EDELSTAHL, Geberit Mapress Kupfer, Nussbaum Cupress, Nussbaum Optipress, Uponor Unipipe, Viega-'profipress', Viega-'profipress G', Viega-'sanfix P', Viega-'sanpress', Viega-'Viegatherm P', Wavin Tigris. The TÜV-certificates confirm that REMS crimping tools are suitable for producing perfect and system-conformity pressing joints corresponding to these systems.

Suitability test according to DVGW W 534 (potable water)

Pressing joints produced with REMS pressing tools were tested by the state-operated material testing institute in Darmstadt/Germany or the material testing institute of the Land of North-Rhine-Westphalia, Germany according to DVGW work sheet W 534. These material testing institutes are certified by the DVGW for making these tests. A representative cross-section of press joints of pressfitting systems Geberit Mapress Edelstahl, Raccorderie Metalliche inoxPRES, Raccorderie Metalliche steelPRES, Uponor Unipipe, Viega Profipress and Viega Raxofix. was tested. The tests led to the result that all REMS pressing tools are suitable for producing perfect and system conformity pressing joints in accordance with these systems.

Suitability test according to DVGW G 5614/VP 625 or prEN 1254-7 (gas)

Pressing joints made with REMS pressing tools have been tested by the TÜV or by the Land Material Testing Institute Nordrhein-Westfalen or the DVGW Research Institute Karlsruhe according to DVGW Regulations G 5614/VP 625 or by the BSI (UK) according to prEN 1254-7. A representative cross-section of pressing joints of the pressfitting systems Geberit Mapress Edelstahl Gas, Geberit Mapress Kupfer Gas, Henco Gas, IBP >B<press Gas, Kembla KemPress Gas, Pegler Yorkshire X-Press Copper Gas, Raccorderie Metalliche inoxPRES Gas, Uponor MLC-G, Valsir PEXAL Gas, Viega Profipress G, Viega Pexfit G, Viega Sanpress INOX G, Viega PropressG GAS System (AUS) was tested. The tests led to the result that all REMS pressing tools are suitable for producing perfect and system conformity pressing joints in accordance with these systems.



potable water



gas

Hold-Harmless and Indemnification Agreement

REMS is the first system-independent machine and tool manufacturer to sign liability acceptance agreements for pressing tools.

A hold-harmless and indemnification agreement exists with the:

Zentralverband Sanitär Heizung Klima (Central Organization for the Sanitary-, Heating- and Climatization Industries),
Rathausallee 6, D-53757 St. Augustin,
referred to in the following as "ZVSHK",

Bundesindustrieverband Technische Gebäudeausrüstung e.V.,
Hinter Hoben 149, 53129 Bonn,
referred to in the following as "BTGA",

Verband Deutscher Kälte-Klima-Fachbetriebe e. V. (German Association for Coolant & Air-Conditioning Profession Industries),
Kaiser-Friedrich-Straße 7, D-53113 Bonn,
referred to in the following as "VDKF",

Schweizerisch-Liechtensteinischem Gebäudetechnikverband (Swiss-Liechtenstein Technical Building Association),
Auf der Mauer 11, CH-8023 Zürich,
referred to in the following as "suissetec",

The Zentralverband Sanitär Heizung Klima (ZVSHK), the Bundesindustrieverband Technische Gebäudeausrüstung e. V. (BTGA), the Verband Deutscher Kälte-Klima-Fachbetriebe e. V. (VDKF) and the Schweizerisch-Liechtensteinische Gebäudetechnikverband (suissetec) have made liability acceptance agreements in the interests of trade and industry with REMS GmbH & Co KG (REMS) for the radial pressing tools.

- Manual radial press REMS Eco-Press
- Cordless radial press REMS Mini-Press ACC
- Cordless radial press REMS Mini-Press 22V ACC
- Cordless radial press REMS Mini-Press S 22V ACC
- Electric radial press REMS Power-Press SE
- Electro-hydraulic radial press REMS Power-Press
- Electro-hydraulic radial press REMS Power-Press ACC
- Electro-hydraulic radial press REMS Power-Press XL ACC
- Cordless radial press REMS Akku-Press
- Cordless radial press REMS Akku-Press ACC
- REMS pressing tongs
- REMS pressing rings
- REMS pressing tongs Mini

This makes REMS the first system-independent machine- and tool manufacturer to have concluded a hold-harmless and indemnification agreement for pressing tools. The conclusion of the agreement was effected on the basis of a successful cooperation established on partnership between REMS, the crafts, trades and industry and their organizations.

Eligible for services and performances from this agreement are all independent professional craftsmen, and companies of such, who are enrolled in the register of artisans and craftsmen (referred to in the following as "SHK-Establishments"), in as far as they have been members of the crafts guild of the sanitary- heating- and climatization enterprises competent for their business location at the time the damage event has arisen, and this crafts guild is associated with a regional guild association, which is a member of the ZVSHK.

Entitled to the services from the agreement with the BTGA are all building technology companies (hereinafter referred to as "TGA companies") insofar as they were a member of the Bundesindustrieverband Technische Gebäudeausrüstung responsible at the seat of their company at the time of the damage case and therefore an indirect member of the BTGA or direct member of the BTGA.


Eligible for services and performances from this agreement with the VDKF are all coolant systems companies or professional organisations (referred to as Coolant and Air-Conditioning Profession Industries) who, at the time the damage is caused, are members of the VDKF.

Eligible for services and performances from this agreement are all building systems companies (following TGA companies) who, at the time the damaged is caused, are members of suissetec.

In as far as the radial pressing tools mentioned show a defect with regard to construction, manufacture or material, or if the operator's manuals are faulty, thereby causing damage for the customer of the SHK-establishment, the Coolant and Air-Conditioning Profession Industries, or the TGA-companies, for which the SHK-establishment or the TGA-company is liable, then REMS shall be additionally liable - aside of the statutory prescriptions - for the consequences resulting from leakage, in accordance with the stipulations and provisions of this hold-harmless agreement.

The hold-harmless and indemnification agreement shall be independently valid, regardless of which pressfitting system is pressed with the REMS pressing tools. The current status regarding suitability of the REMS pressing tools for pressfitting systems can be viewed on the Internet: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

Please consult Mr. Walter Hindelang for further information:
walter.hindelang@rem.de.

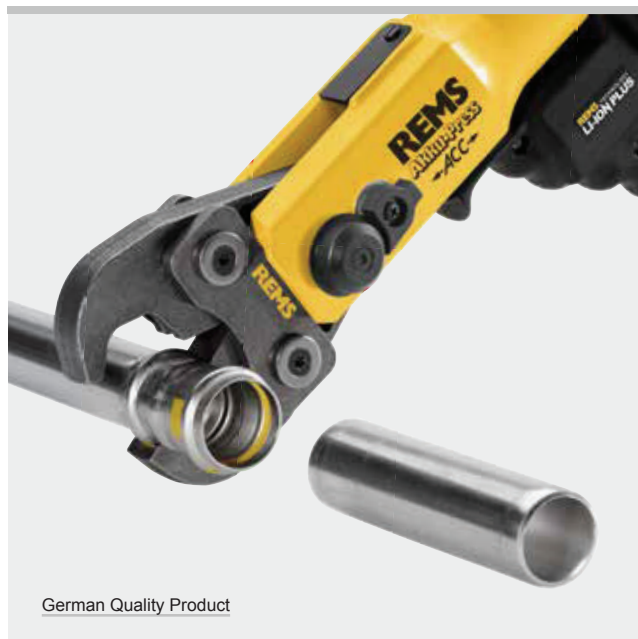

Reliable and safe: REMS was the first system-independent machine and tool manufacturer to sign liability acceptance agreements for pressing tools as early as the year 2000.



REMS cropping tongs

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

High performance cropping tongs in forged and specially hardened steel for cutting threaded rods.

Steel, stainless steel up to hardness classification 4.8 (400 N/mm²) M 6–M 12

REMS cropping tongs – for cutting threaded rods.

Made of forged and specially hardened steel.

Reversible cropping inserts for double service life.

M cropping inserts with high precision thread contour machined on CNC machining centres for exact guiding of the threaded rod in the cutting process. Pliers parts, cropping inserts and specially machined and hardened cutting edges, made to fit exactly, for cutting without burr.




Threaded rod can be screwed into a threaded connection of the pipe clip or the nut without rework after cutting.

Cutting device in pliers design (**Patent EP 1 459 825, patent US 7,284,330**). Drive through all REMS radial presses (except for REMS Mini-Press ACC, REMS Mini-Press 22 V ACC and REMS Mini-Press S 22 V ACC) and through suitable radial presses of other makes. All cropping tongs marked with * have an optional connection (**Patent DE 101 01 440, Patent EP 1 223 008, patent US 6,739,172**) for manual drive through the radial press REMS Eco-Press.

Supply format

REMS cropping tongs. Cropping tongs with 1 pair of reversible cropping inserts for steel, stainless steel, M 6–M 12. In a carton.

Description	for threaded rods	Art.-No.
REMS cropping tongs M 6*	M 6	571890
REMS cropping tongs M 8*	M 8	571895
REMS cropping tongs M 10	M 10	571865
REMS cropping tongs M 12	M 12	571870



German Quality Product



Patent DE 101 01 440
Patent EP 1 223 008
Patent US 6,739,172
Patent EP 1 459 825
Patent US 7,284,330

Accessories

Description	for threaded rods	Art.-No.
Cropping inserts M 6 (pair)	M 6	571891
Cropping inserts M 8 (pair)	M 8	571896
Cropping inserts M 10 (pair)	M 10	571866
Cropping inserts M 12 (pair)	M 12	571871
Steel case with insert for 6 cropping tongs/pressing tongs and compartment for pipe cutter up to 42 mm		570295



REMS cable shear

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

High-grade cable shear in forged and specially hardened steel for cutting electric cable.


Electric cable ≤ 300 mm² (Ø 30 mm)

REMS cable shear – Easy cutting of electric cable.

Made of forged and specially hardened steel.

Replaceable cutting blades manufactured on CNC production centres ensure a precision blade geometry and long service life. Large cutting range.

Drive through electric REMS radial presses (except for REMS Mini-Press ACC, REMS Mini-Press 22 V ACC and REMS Mini-Press S 22 V ACC) and through suitable radial presses of other makes.



German Quality Product



Supply format

REMS cable shear. Cable shears with 2 changeable cable cutters for electric cables ≤ 300 mm² (Ø 30 mm). In a carton.

	Art.-No.
	571887

Accessories

Description	Art.-No.
Cable cutters (pack of 2)	571889

