


- opening for penetrations
- for buildings **yet to be constructed**
- for **waterproof concrete** (white tank)



Product benefits

- homogeneous connection to concrete, reinforced by special grooving
- the inside face of the sleeve provides an optimum contact surface for the elastomer of the Curaflex® gasket insert
- watertight bond with the concrete because the coefficient of expansion of the material corresponds to that of concrete
- for buildings without tanking membranes

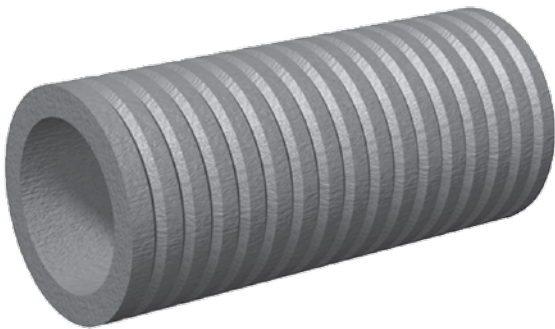

Technical details

- gas-tight when both inside and front faces of sleeve are coated
- can be used in conjunction with all Curaflex® gasket inserts

Material:

- asbestos-free special fibre cement

Accessories from page 88

pipe external diameter from - to	NB pipe sleeve [mm]	pipe sleeve diameter D ₂ max. [mm]	standard length L ₁ [mm]
1 - 40	80	≤ 140	200 240 250 300 350 365 400 500 650 1000
41 - 57	100	≤ 160	
58 - 77	125	≤ 156	
78 - 104	150	≤ 187	
105 - 145	200	≤ 238	
146 - 190	250	≤ 289	
191 - 233	300	≤ 347	
234 - 288	350	≤ 395	
289 - 339	400	≤ 461	
340 - 380	450	≤ 511	
381 - 430	500	≤ 570	
431 - 530	600	≤ 673	
531 - 620	700	≤ 787	

We supply pipe sleeves in more sizes. Please call: 01952 510050

Variant:
Curaflex® pipe sleeve 3000/T
longitudinally split version. For
installations with existing pipeline in the wall

