


2 CONFIGURATION C33X - CONCENTRIC VERTICAL FORCED FLUE ALU/PPs (CONNECTION TO SLOPING ROOF OR FLAT ROOF)

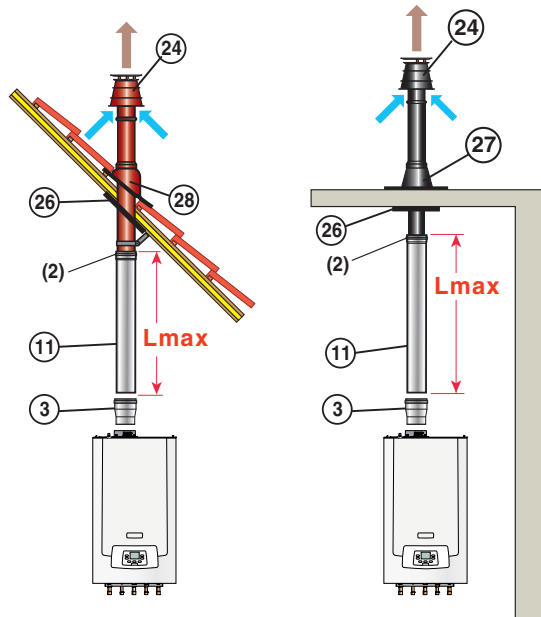

Boiler shown:
MPX connected to the vertical forced flue
Ø 80/125 mm (package DY 843) + Adapter
Ø 60/100 on 80/125 mm (package DY708)

| Boiler types | Ø connect. (mm) | | Lmax (m) | |
|--------------------|-----------------|--------|----------|--------|
| | 60/100 | 80/125 | 60/100 | 80/125 |
| MPX 24 Compact | 10 | 25 | | |
| MPX ... MI Compact | | | | |
| MPX 28/33 BIC | | | | |

| Connect. Ø (mm) | Equivalent length (m) | |
|--------------------------|-----------------------|--------|
| | 60/100 | 80/125 |
| 87° elbow | 1.1 | 1.5 |
| 45° elbow | 0.8 | 1.0 |
| 30° elbow | 0.7 | - |
| 15° elbow | 0.5 | - |
| Straight inspection pipe | 0.5 | 0.6 |
| Inspection T | 2.2 | 2.7 |
| Inspection elbow | - | 2.0 |
| Condensates recup. | - | 0.8 |

⇒ Alu/PPs flue systems accessories needed at the very least for connection to a vertical forced flue

| Description | Diagrams with Dimensions/References | Boiler types | MPX | |
|---|-------------------------------------|--|--------|--------|
| | | Ø connect. (mm) | 60/100 | 80/125 |
| | | Package/Ref. | | |
| Vertical air/flue gas terminal Ø 60/100 mm (black or red) | or (24) | DY928 7650968 (black) or DY929 7650969 (red) | X | |
| Vertical air/flue gas terminal Ø 80/125 mm (black or red) | or (24) | DY843 100002732 (black) or DY844 100002733 (red) | | X |
| Adapter Ø 80/125 mm on 60/100 mm | (3) | DY708 84887708 | | X |

⇒ Other flue systems accessories available, see pages 92 (Alu/PPs) and 98 (common accessories)