


ST PERFORMANCE DATA - 50 Hz

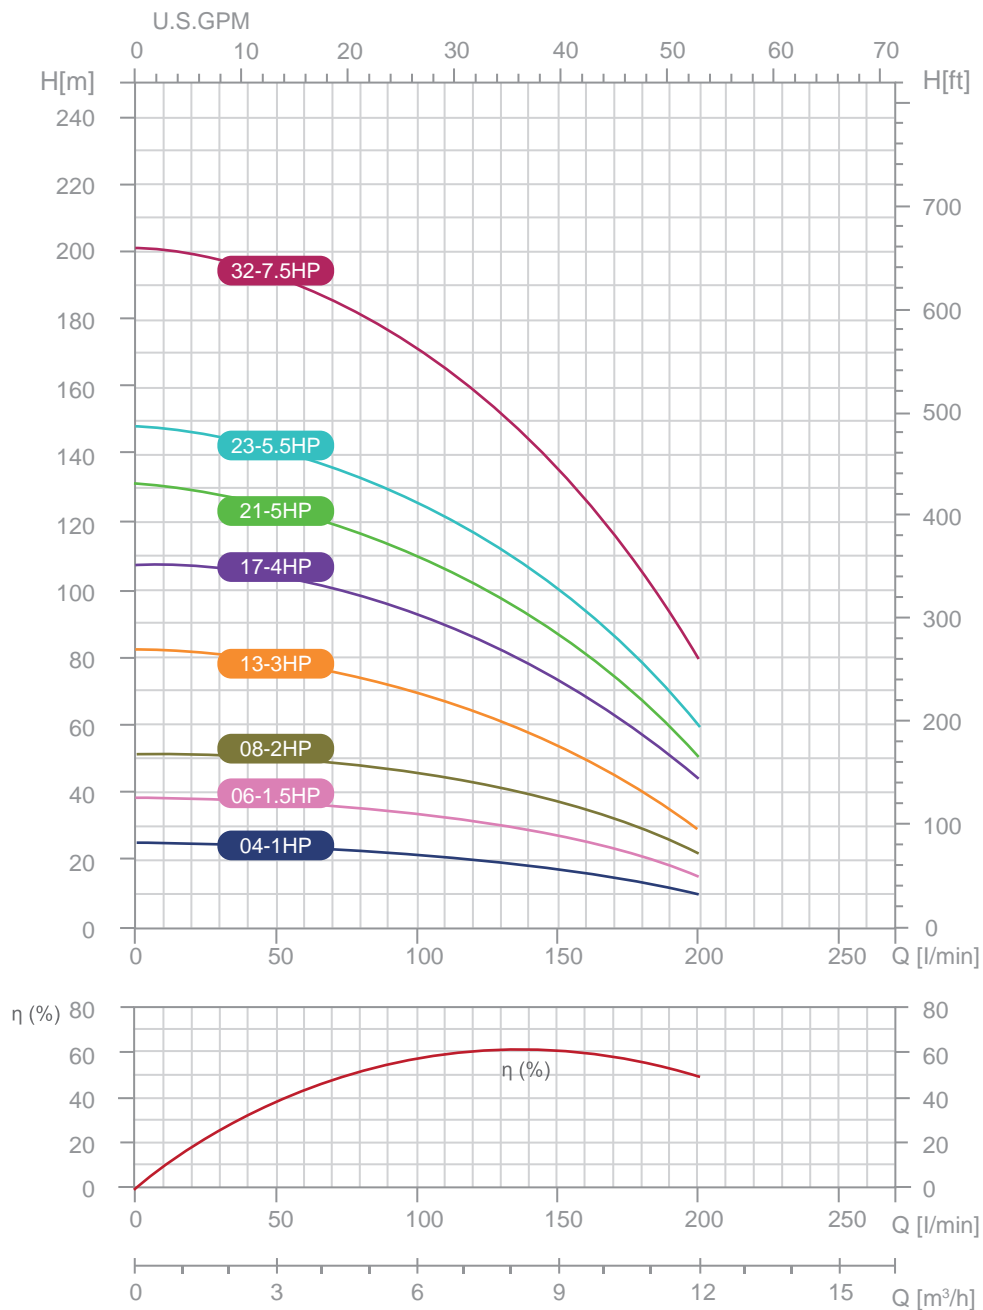

ST 40

TYPE	N. OF STAGES	MOTOR		PUMP		
		KW	HP	L (mm)	DN (RPT or NPT)	kg
ST 4004	4	0.75	1.00	294	2"	2.8
ST 4006	6	1.10	1.50	356	2"	3.4
ST 4008	8	1.50	2.00	418	2"	4.0
ST 4013	13	2.20	3.00	573	2"	5.5
ST 4017	17	3.00	4.00	697	2"	6.6
ST 4021	21	3.70	5.00	859	2"	7.8
ST 4023	23	4.00	5.50	921	2"	8.4
ST 4032	32	5.50	7.50	1238	2"	11.0

TYPE	Q	DELIVERY							
		M ³ /hr	0	7.2	7.8	8.4	9.0	9.6	12
		L/min	0	120	130	140	150	160	200
ST 4004	HEAD H m	26	21	20	19	18	17	11	
ST 4006		39	32	30	29	27	26	18	
ST 4008		52	43	40	39	37	35	24	
ST 4013		82	66	62	59	53	50	30	
ST 4017		108	87	83	79	75	70	47	
ST 4021		132	103	98	93	88	82	52	
ST 4023		148	118	113	108	101	95	60	
ST 4032		202	160	151	143	133	125	80	